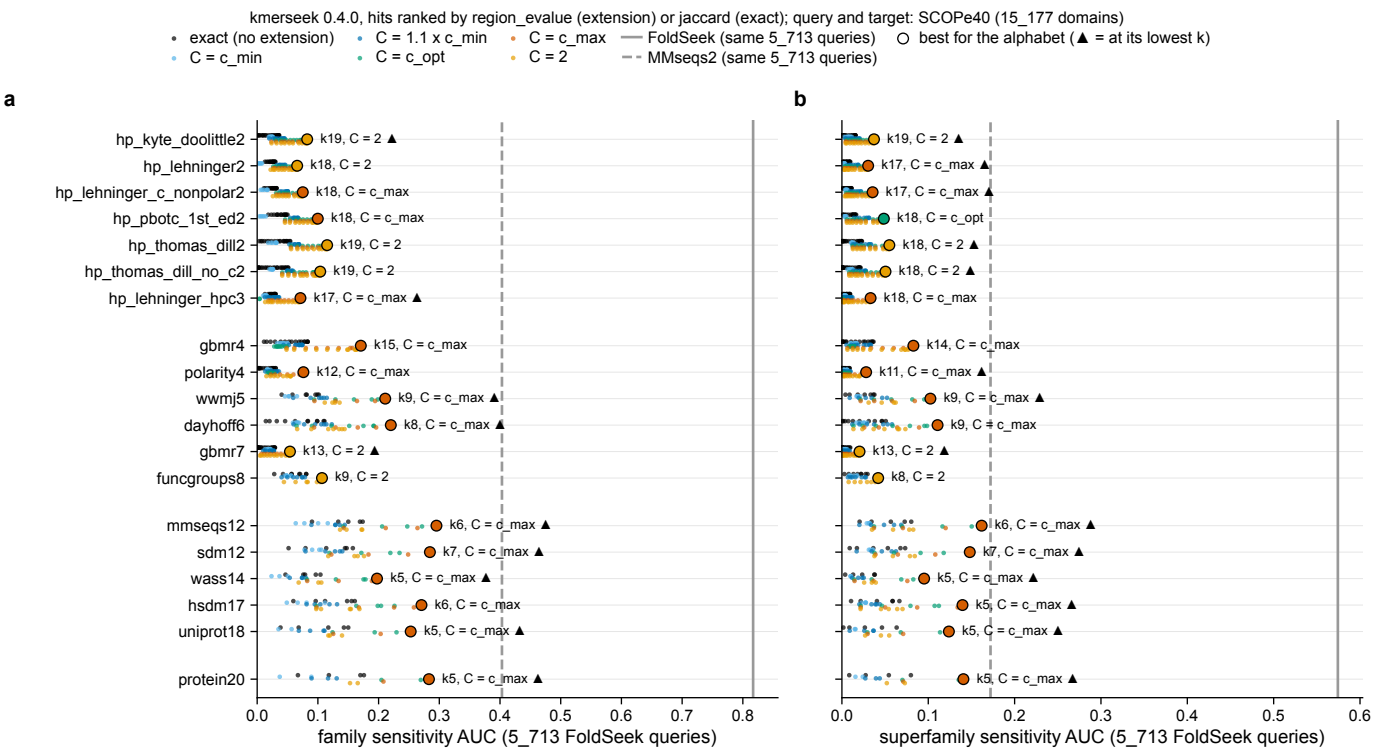

kmerseek 0.4.0, hits ranked by region_evalue (extension) or jaccard (exact); query and target: SCOPe40 (15_177 domains)
exact (no extension)
C = c_min
C = 1.1 x c_min
C = c_opt
C = c_max
C = 2
FoldSeek (same 5_713 queries)
MMseqs2 (same 5_713 queries)
best for the alphabet (▲ = at its lowest k)
a
hp_kyte_doolittle2
hp_lehninger2
hp_lehninger_c_nonpolar2
hp_pbotc_1st_ed2
hp_thomas_dill2
hp_thomas_dill_no_c2
hp_lehninger_hpc3
gbmr4
polarity4
wwmj5
dayhoff6
gbmr7
funcgroups8
mmseqs12
sdm12
wass14
hsdm17
uniprot18
protein20
k19, C = 2 ▲
k18, C = 2
k18, C = c_max
k18, C = c_max
k19, C = 2
k19, C = 2
k17, C = c_max ▲
k15, C = c_max
k12, C = c_max
k9, C = c_max ▲
k8, C = c_max ▲
k13, C = 2 ▲
k9, C = 2
k6, C = c_max ▲
k7, C = c_max ▲
k5, C = c_max ▲
k6, C = c_max
k5, C = c_max ▲
k5, C = c_max ▲
0.0 0.1 0.2 0.3 0.4 0.5 0.6 0.7 0.8
family sensitivity AUC (5_713 FoldSeek queries)
b
k19, C = 2 ▲
k17, C = c_max ▲
k17, C = c_max ▲
k18, C = c_opt
k18, C = 2 ▲
k18, C = 2 ▲
k18, C = c_max
k14, C = c_max
k11, C = c_max ▲
k9, C = c_max ▲
k9, C = c_max
k13, C = 2 ▲
k8, C = 2
k6, C = c_max ▲
k7, C = c_max ▲
k5, C = c_max ▲
k5, C = c_max ▲
k5, C = c_max ▲
k5, C = c_max ▲
0.0 0.1 0.2 0.3 0.4 0.5 0.6
superfamily sensitivity AUC (5_713 FoldSeek queries)