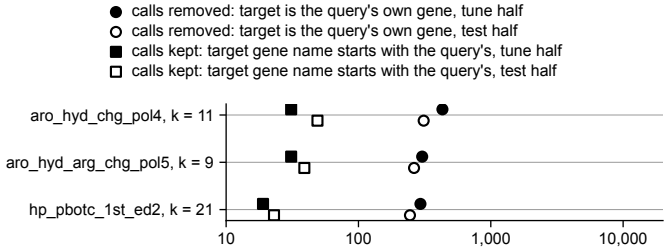kmerseek: set A exon queries (exon plus 20 residues each side) against the regions index (Swiss-Prot 2026_03 annotated regions, no mammals; PR 114). protein20 k = 5 left out: no E-values in this kmerseek build.