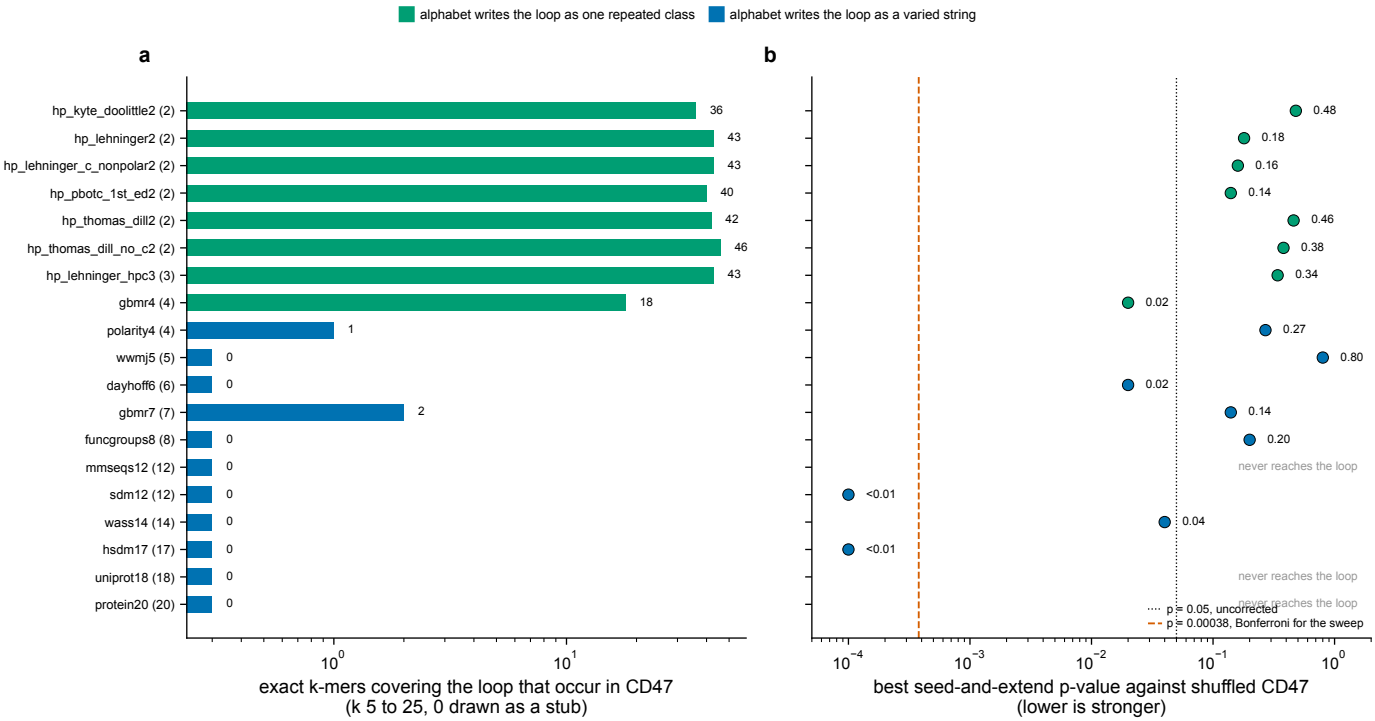
alphabet writes the loop as one repeated class
alphabet writes the loop as a varied string
a
hp_kyte_doolittle2 (2)
hp_lehninger2 (2)
hp_lehninger_c_nonpolar2 (2)
hp_pbotc_1st_ed2 (2)
hp_thomas_dill2 (2)
hp_thomas_dill_no_c2 (2)
hp_lehninger_hpc3 (3)
gbmr4 (4)
polarity4 (4)
wwmj5 (5)
dayhoff6 (6)
gbmr7 (7)
funcgroups8 (8)
mmseqs12 (12)
sdm12 (12)
wass14 (14)
hsdm17 (17)
uniprot18 (18)
protein20 (20)
36
43
43
40
42
46
43
18
1
0
0
2
0
0
0
0
0
0
0
10^0
10^1
exact k-mers covering the loop that occur in CD47
(k 5 to 25, 0 drawn as a stub)
b
0.48
0.18
0.16
0.14
0.46
0.38
0.34
0.02
0.27
0.80
0.02
0.14
0.20
never reaches the loop
<0.01
0.04
<0.01
never reaches the loop
never reaches the loop
p = 0.05, uncorrected
p = 0.00038, Bonferroni for the sweep
10^{-4}
10^{-3}
10^{-2}
10^{-1}
10^0
best seed-and-extend p-value against shuffled CD47
(lower is stronger)