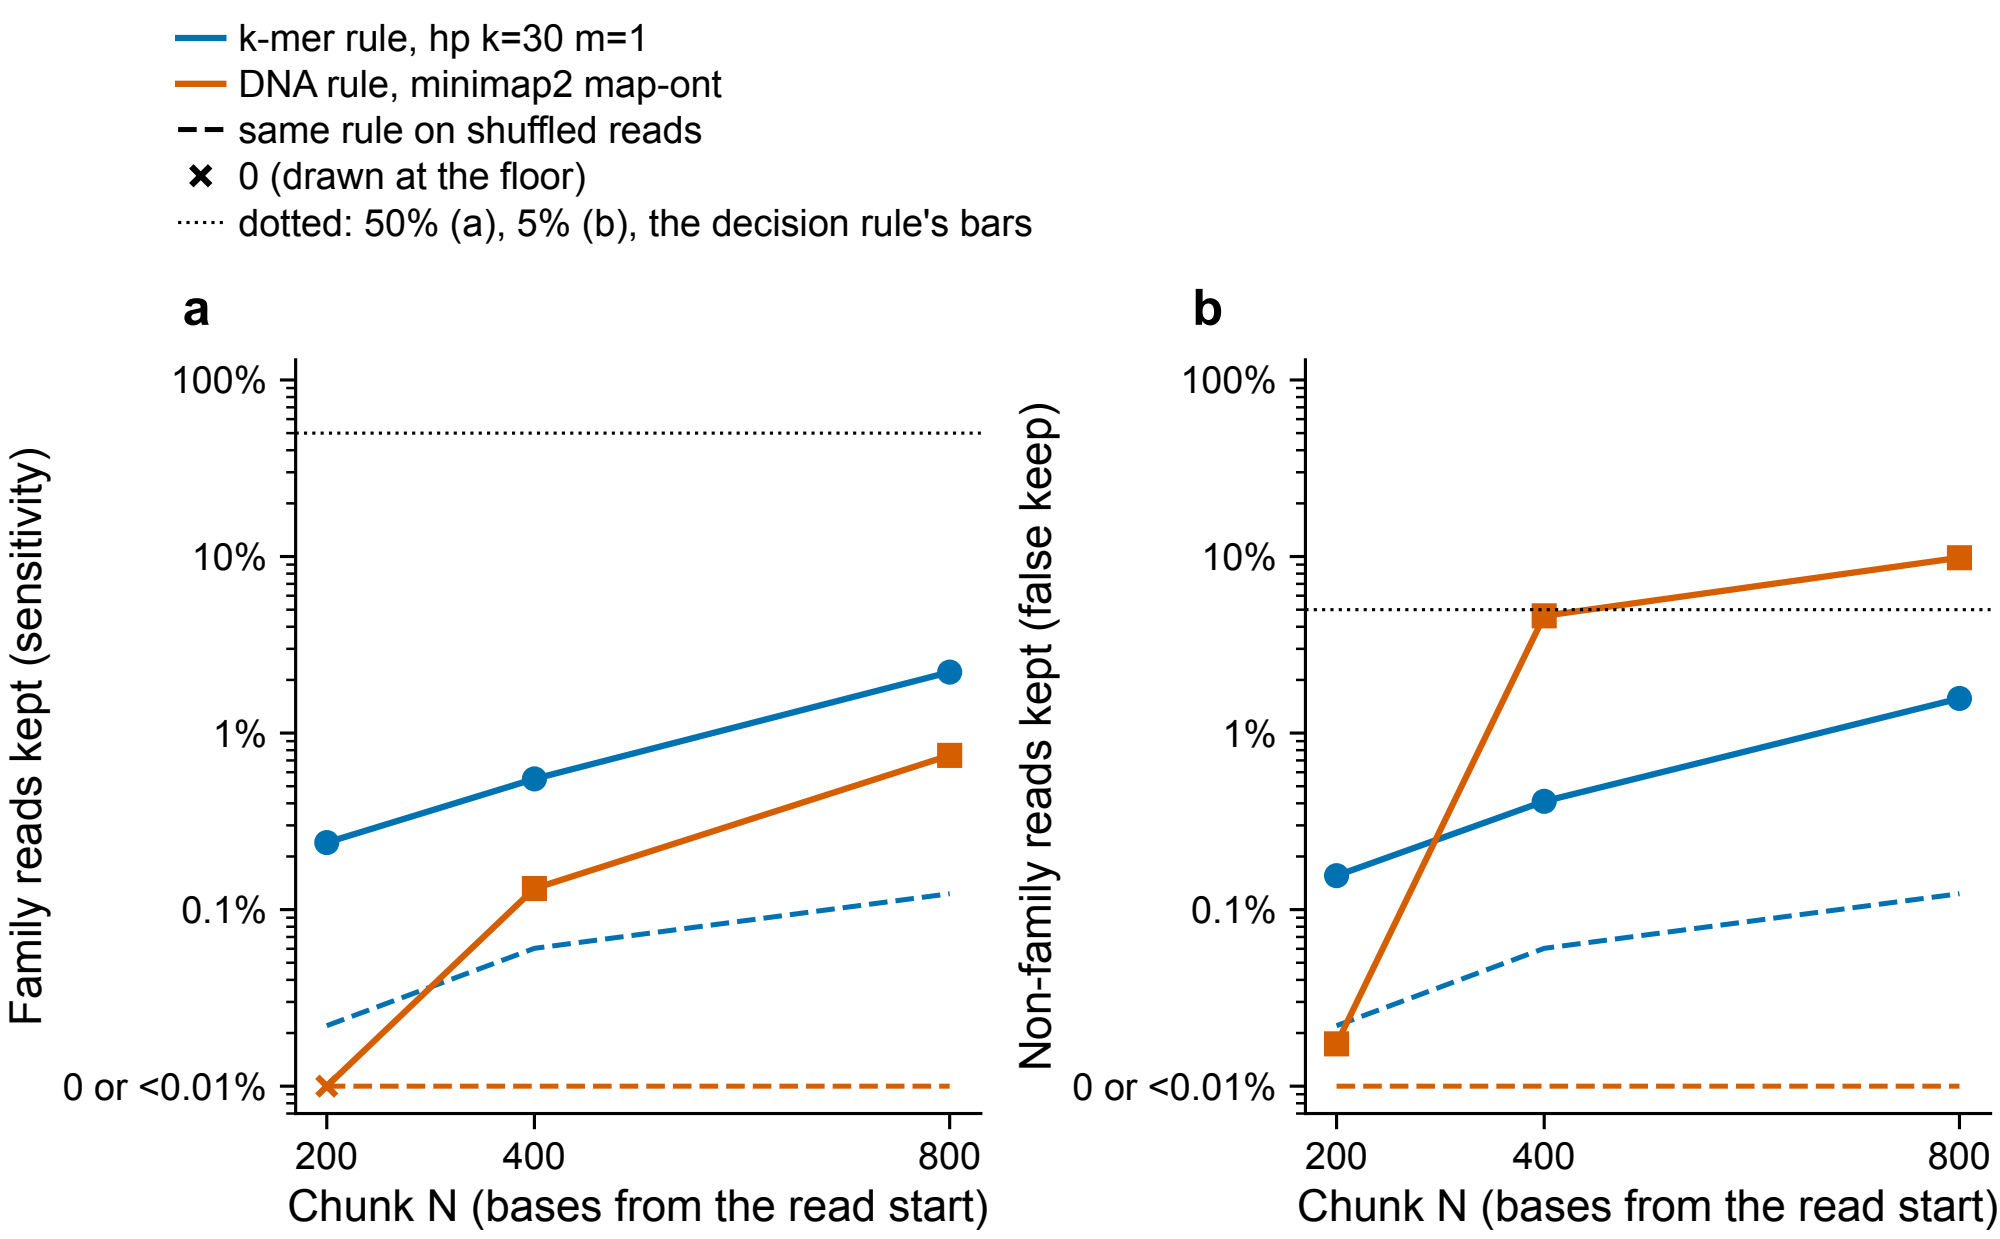
k-mer rule, hp k=30 m=1
DNA rule, minimap2 map-ont
same rule on shuffled reads
0 (drawn at the floor)
dotted: 50% (a), 5% (b), the decision rule's bars
a
b
100%
10%
1%
0.1%
0 or <0.01%
Family reads kept (sensitivity)
Non-family reads kept (false keep)
200
400
800
Chunk N (bases from the read start)