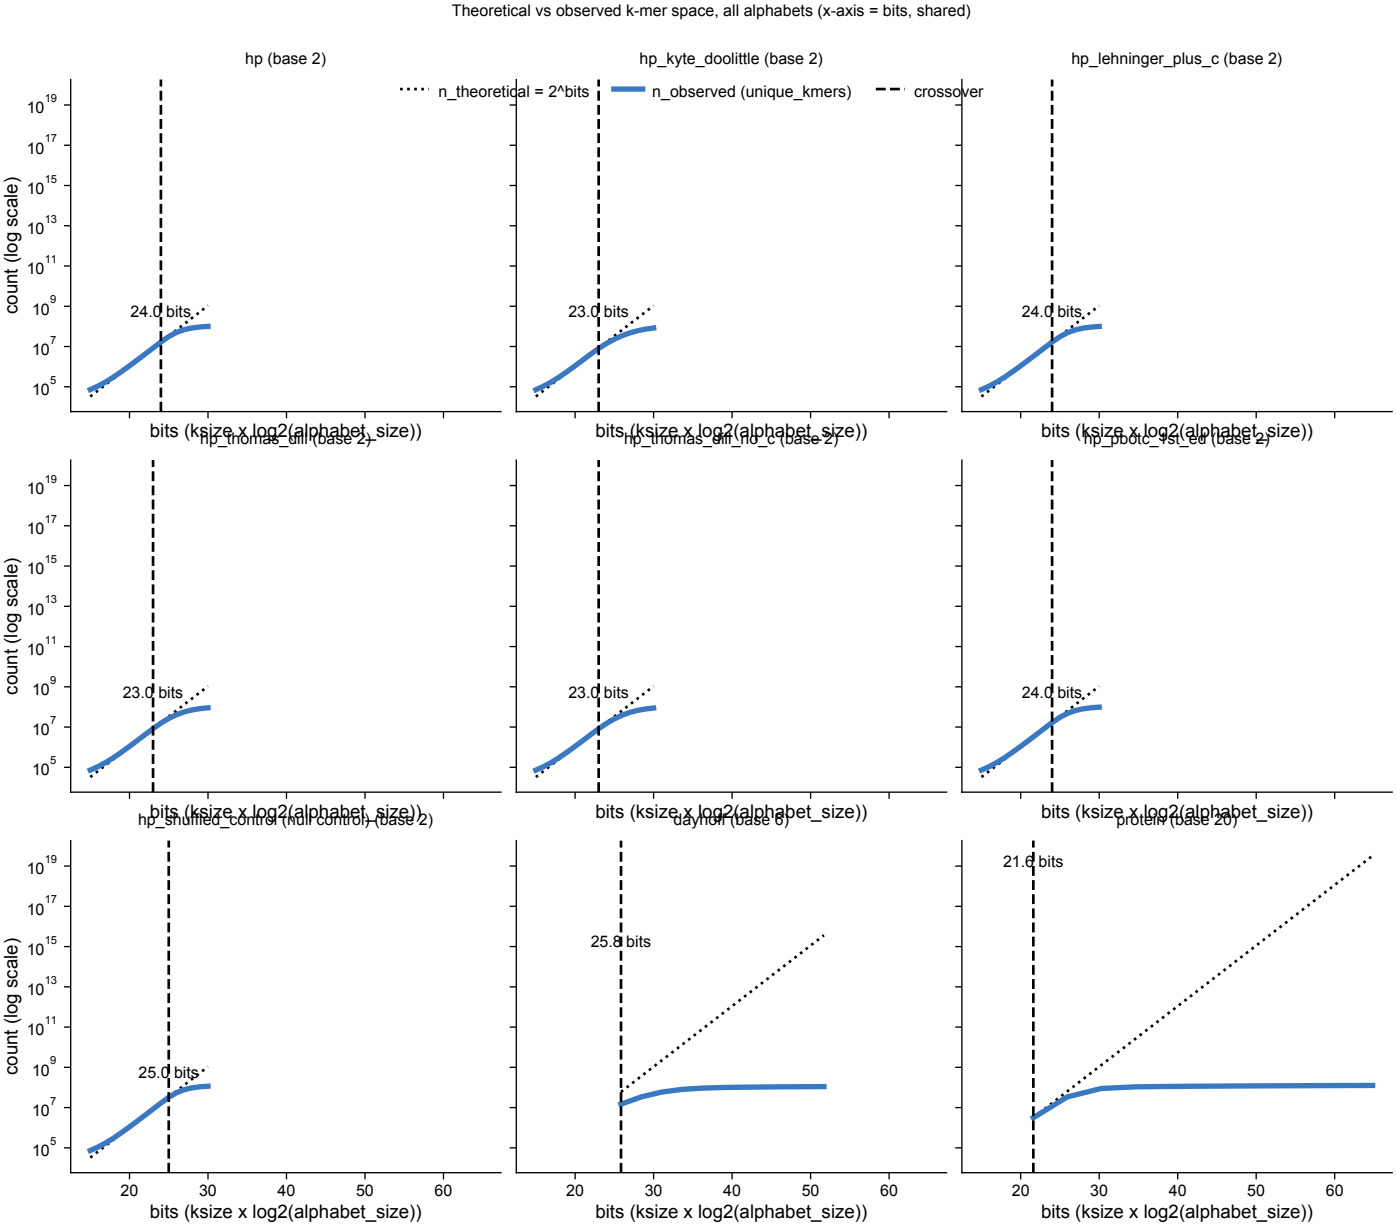
Theoretical vs observed k-mer space, all alphabets (x-axis = bits, shared)
hp (base 2)
hp_kyte_doolittle (base 2)
hp_lehninger_plus_c (base 2)
n_theoretical = 2^bits
n_observed (unique_kmers)
crossover
count (log scale)
24.0 bits
23.0 bits
24.0 bits
hp_thomas_dill (base 2)
hp_thomas_dill_no_c (base 2)
hp_pbotc_vst_ed (base 2)
23.0 bits
23.0 bits
24.0 bits
hp_shuffled_control (null control) (base 2)
dayhoff (base 6)
protein (base 20)
25.0 bits
25.8 bits
21.6 bits
bits (ksize x log2(alphabet_size))