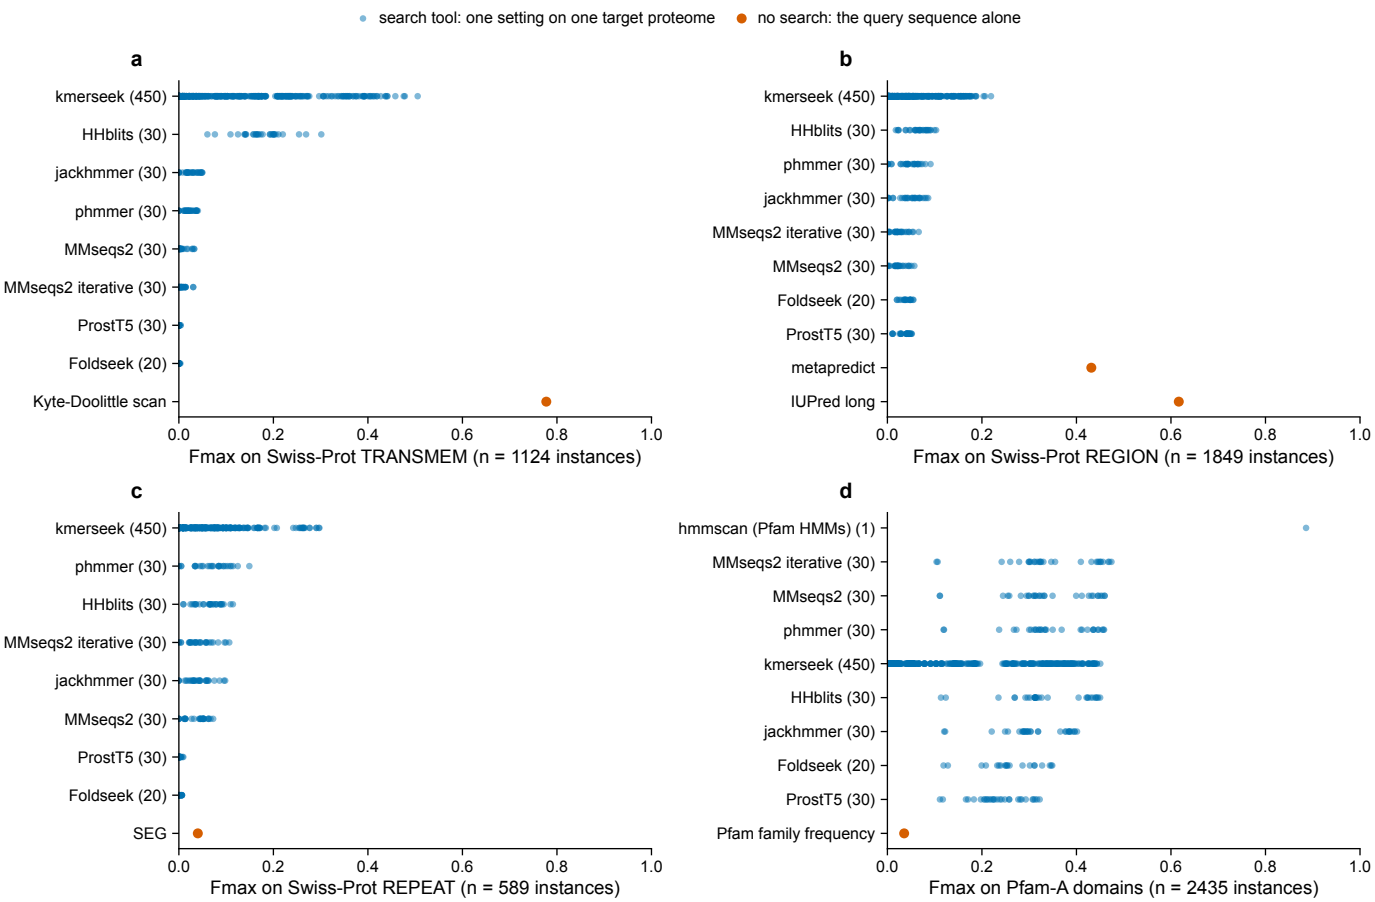

search tool: one setting on one target proteome
no search: the query sequence alone
a
kmerseek (450)
HHblits (30)
jackhmmer (30)
phmmer (30)
MMseqs2 (30)
MMseqs2 iterative (30)
ProstT5 (30)
Foldseek (20)
Kyte-Doolittle scan
0.0
0.2
0.4
0.6
0.8
1.0
Fmax on Swiss-Prot TRANSMEM (n = 1124 instances)
b
kmerseek (450)
HHblits (30)
phmmer (30)
jackhmmer (30)
MMseqs2 iterative (30)
MMseqs2 (30)
Foldseek (20)
ProstT5 (30)
metapredict
IUPred long
0.0
0.2
0.4
0.6
0.8
1.0
Fmax on Swiss-Prot REGION (n = 1849 instances)
c
kmerseek (450)
phmmer (30)
HHblits (30)
MMseqs2 iterative (30)
jackhmmer (30)
MMseqs2 (30)
ProstT5 (30)
Foldseek (20)
SEG
0.0
0.2
0.4
0.6
0.8
1.0
Fmax on Swiss-Prot REPEAT (n = 589 instances)
d
hmmscan (Pfam HMMs) (1)
MMseqs2 iterative (30)
MMseqs2 (30)
phmmer (30)
kmerseek (450)
HHblits (30)
jackhmmer (30)
Foldseek (20)
ProstT5 (30)
Pfam family frequency
0.0
0.2
0.4
0.6
0.8
1.0
Fmax on Pfam-A domains (n = 2435 instances)