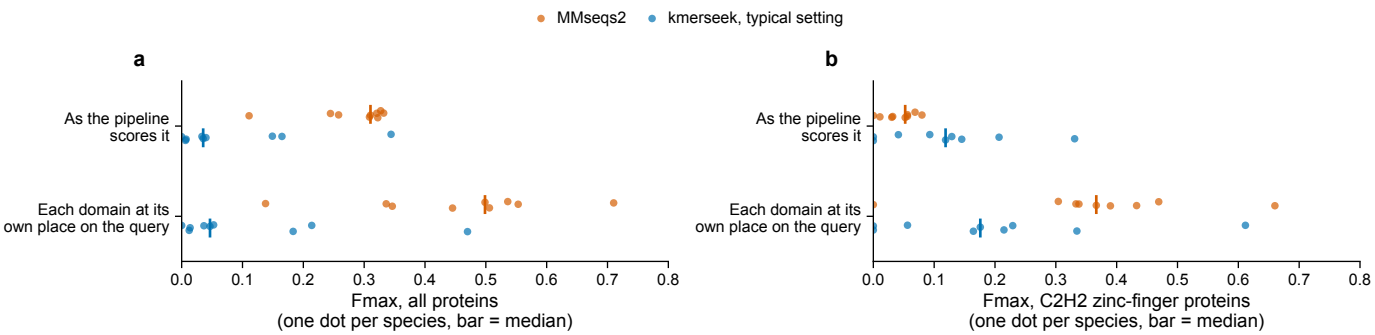
MMseqs2
kmerseek, typical setting
a
As the pipeline scores it
Each domain at its own place on the query
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
Fmax, all proteins
(one dot per species, bar = median)
b
As the pipeline scores it
Each domain at its own place on the query
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
Fmax, C2H2 zinc-finger proteins
(one dot per species, bar = median)