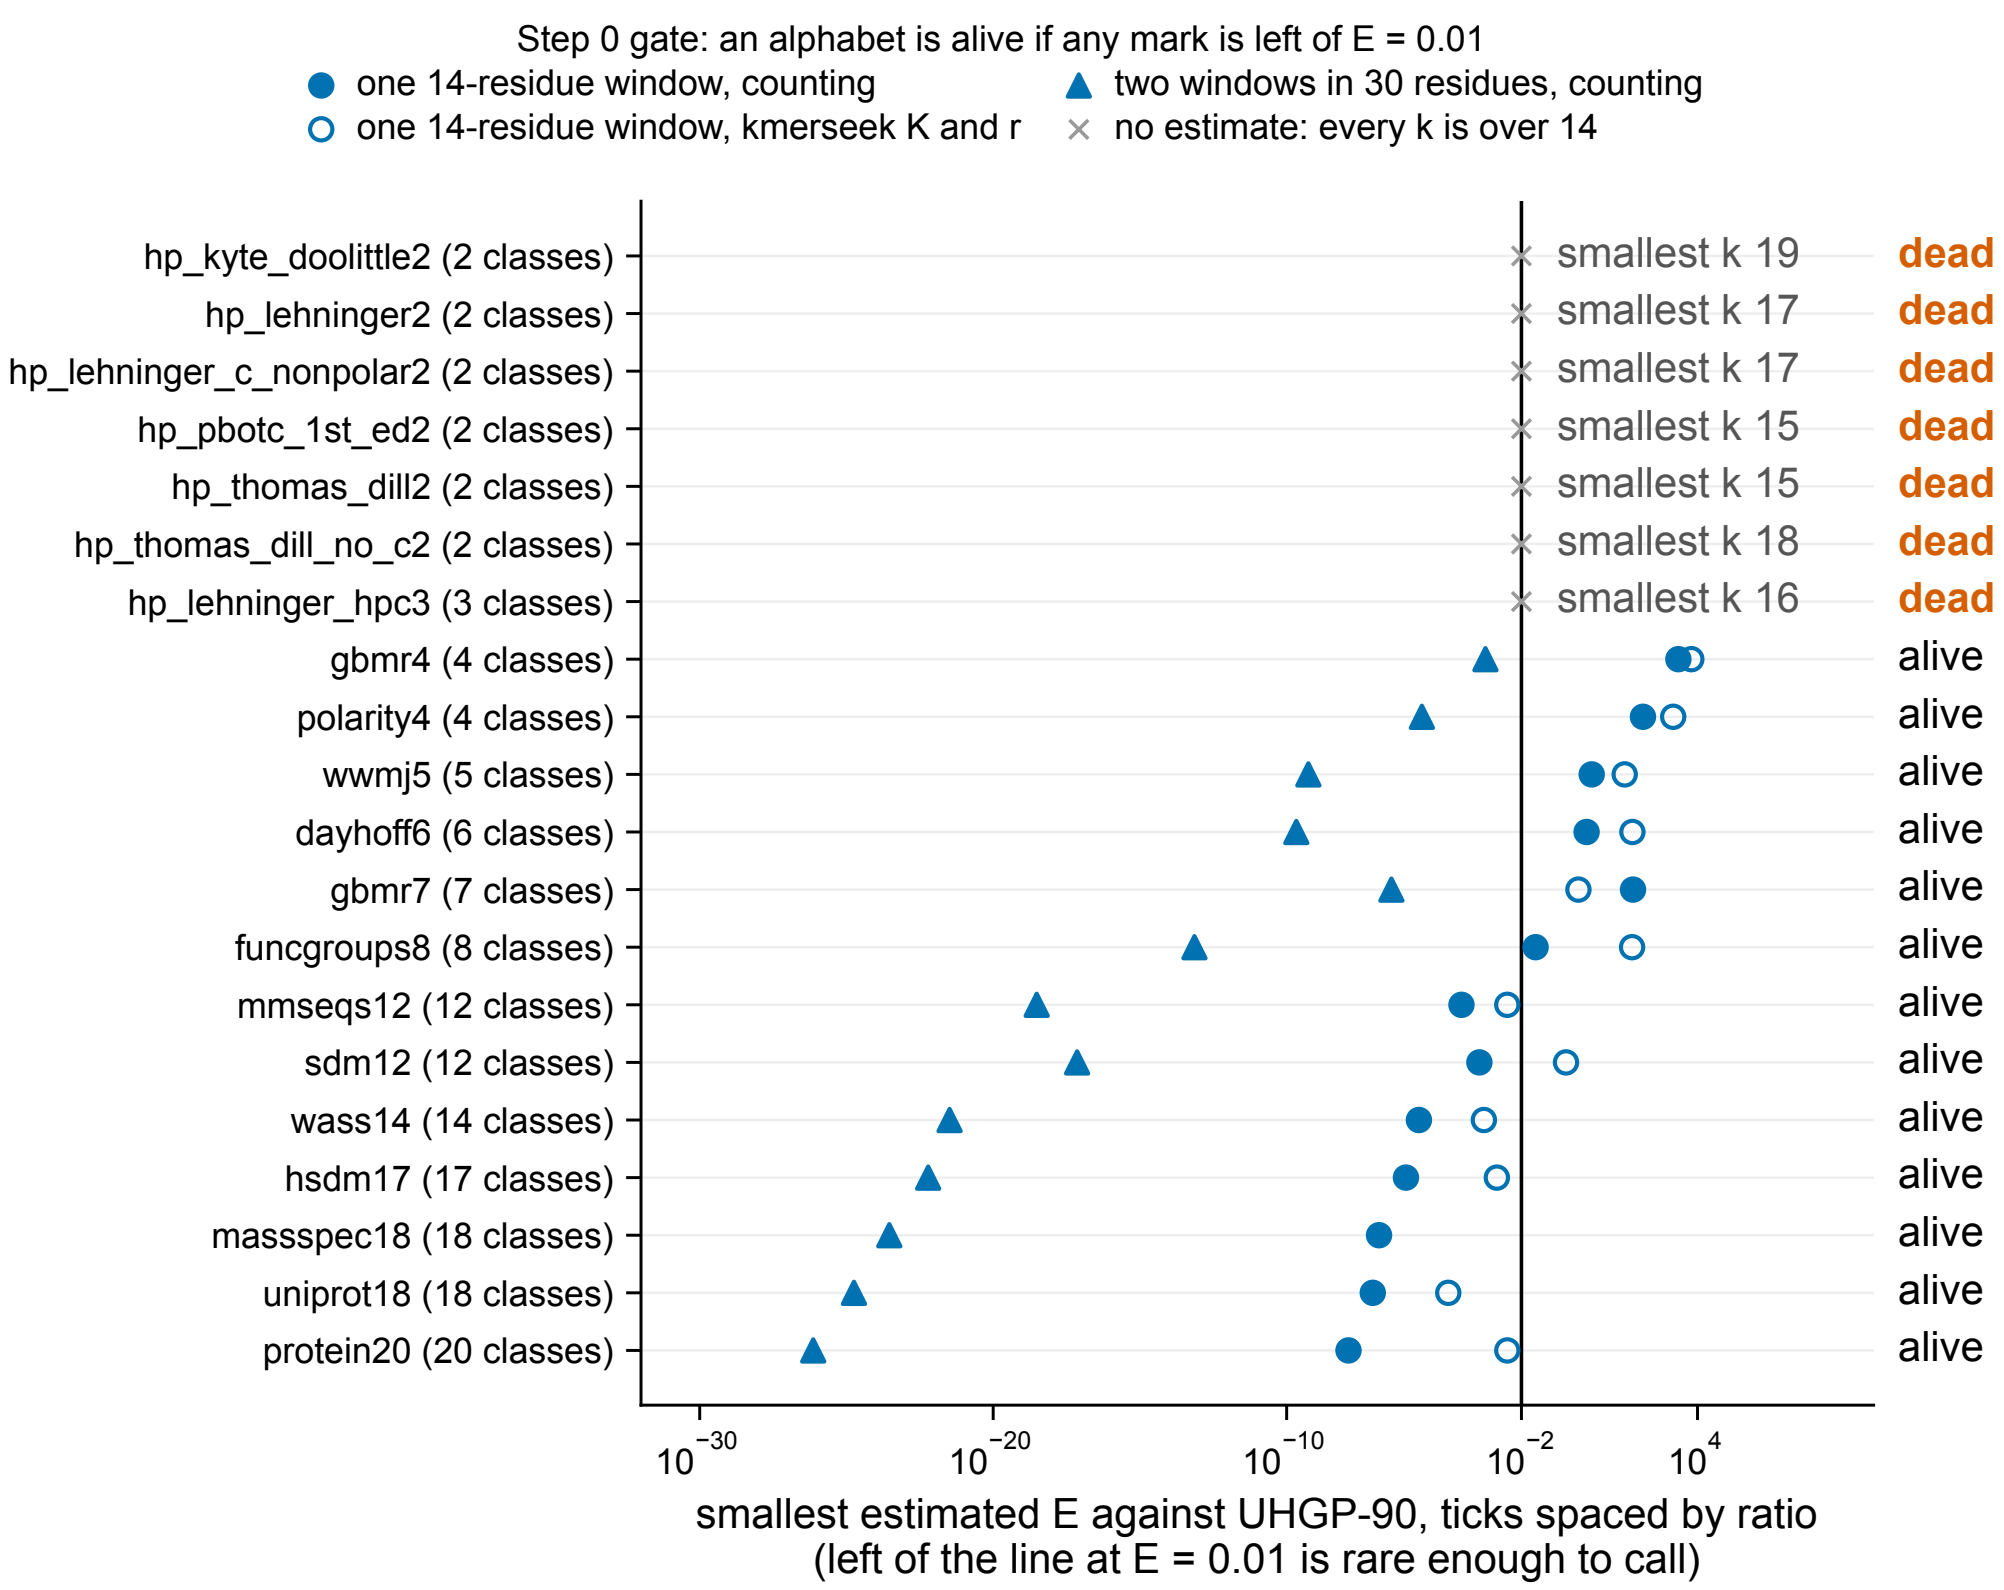
Step 0 gate: an alphabet is alive if any mark is left of E = 0.01
one 14-residue window, counting
one 14-residue window, kmerseek K and r
two windows in 30 residues, counting
no estimate: every k is over 14
hp_kyte_doolittle2 (2 classes)
hp_lehninger2 (2 classes)
hp_lehninger_c_nonpolar2 (2 classes)
hp_pbotc_1st_ed2 (2 classes)
hp_thomas_dill2 (2 classes)
hp_thomas_dill_no_c2 (2 classes)
hp_lehninger_hpc3 (3 classes)
gbmr4 (4 classes)
polarity4 (4 classes)
wwmj5 (5 classes)
dayhoff6 (6 classes)
gbmr7 (7 classes)
funcgroups8 (8 classes)
mmseqs12 (12 classes)
sdm12 (12 classes)
wass14 (14 classes)
hsdm17 (17 classes)
massspec18 (18 classes)
uniprot18 (18 classes)
protein20 (20 classes)
smallest k 19
smallest k 17
smallest k 17
smallest k 15
smallest k 15
smallest k 18
smallest k 16
dead
dead
dead
dead
dead
dead
dead
alive
alive
alive
alive
alive
alive
alive
alive
alive
alive
alive
alive
10^{-30}
10^{-20}
10^{-10}
10^{-2}
10^{4}
smallest estimated E against UHGP-90, ticks spaced by ratio
(left of the line at E = 0.01 is rare enough to call)