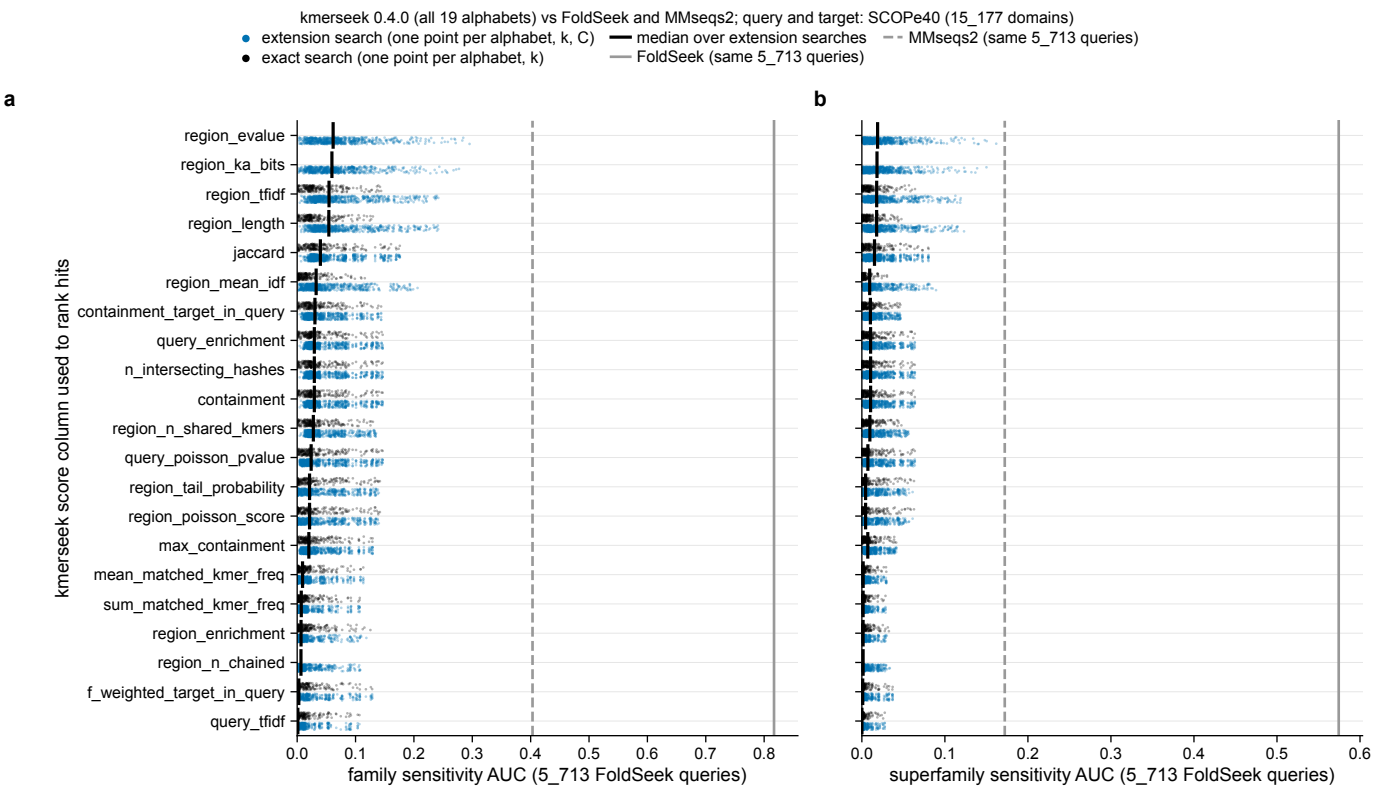

kmerseek 0.4.0 (all 19 alphabets) vs FoldSeek and MMseqs2; query and target: SCOPe40 (15_177 domains)
extension search (one point per alphabet, k, C)
exact search (one point per alphabet, k)
median over extension searches
FoldSeek (same 5_713 queries)
MMseqs2 (same 5_713 queries)
a
b
kmerseek score column used to rank hits
region_evalue
region_ka_bits
region_tfidf
region_length
jaccard
region_mean_idf
containment_target_in_query
query_enrichment
n_intersecting_hashes
containment
region_n_shared_kmers
query_poisson_pvalue
region_tail_probability
region_poisson_score
max_containment
mean_matched_kmer_freq
sum_matched_kmer_freq
region_enrichment
region_n_chained
f_weighted_target_in_query
query_tfidf
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
family sensitivity AUC (5_713 FoldSeek queries)
superfamily sensitivity AUC (5_713 FoldSeek queries)