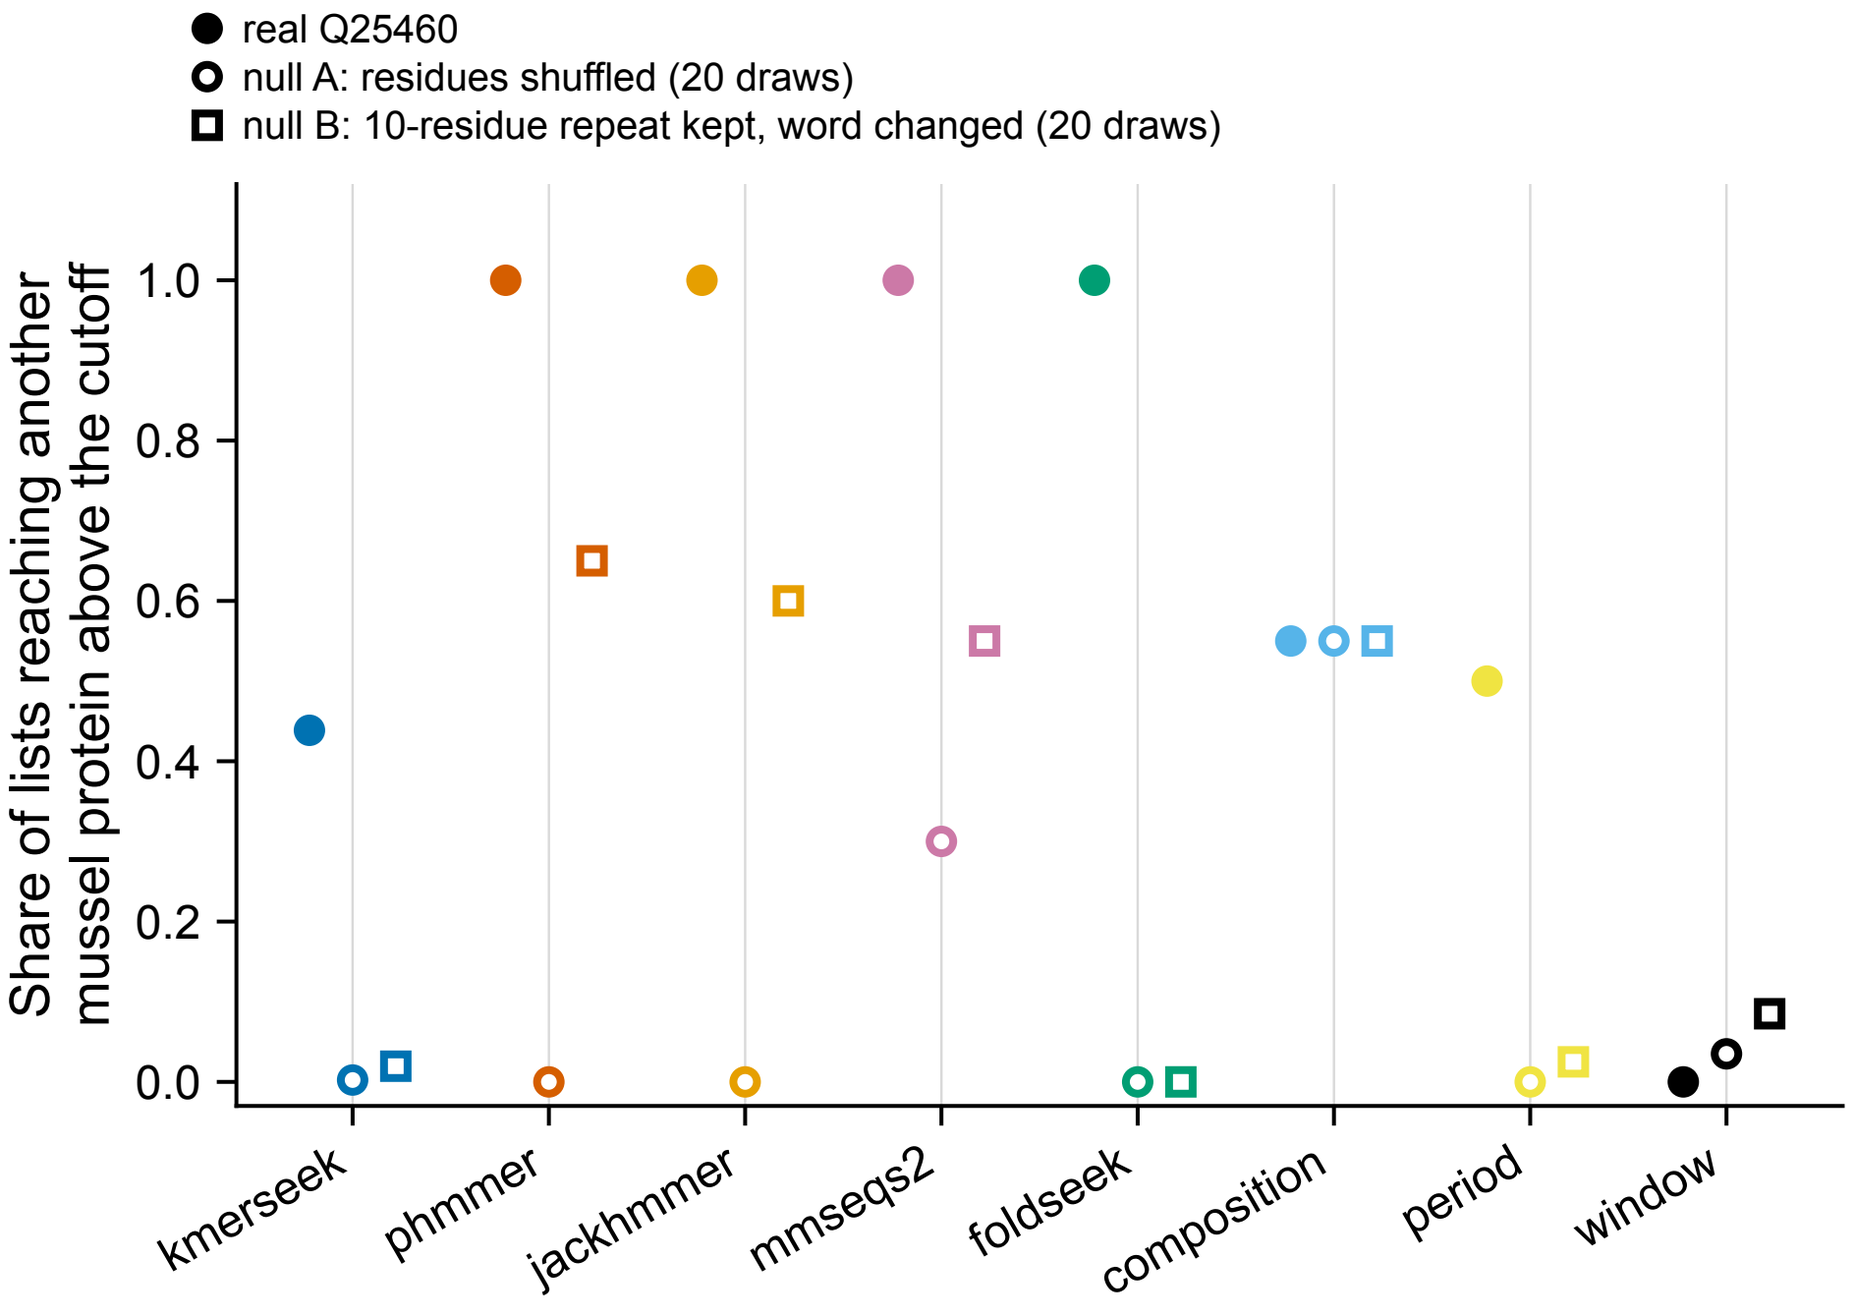TOOLS: query Q25460 and its 40 null draws against Swiss-Prot 2026_03 plus 3 TrEMBL entries; kmerseek 0.4, 171 searched settings; colour = method, as in the figure above
HYPOTHESIS: a method that reads the order of residues reaches the mussel proteins from the real query and not from shuffled copies (filled dot high, open circle near 0)
CONCLUSION: the composition scans reach them from shuffled copies as often as from the real query (55% of lists); kmerseek from shuffled copies in 0.2% of lists, against 44% from the real query; MMseqs2, whose first wrong hit scores only 31 bits, in 30%