


LISTING SPECIFICATIONS:


MATERIAL: ASTM D1784
GASKET JOINT: ASTM D3139
GASKET: ASTM F477
CLASS 150
WALL THICKNESS: SDR 18
* ALL DIMENSIONS IN INCHES

C-900 x SDR-35 BxB Adapters

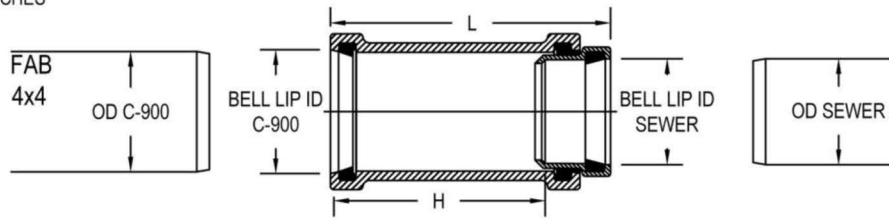


C-900 CI-SIZE

SDR-35 SEWER

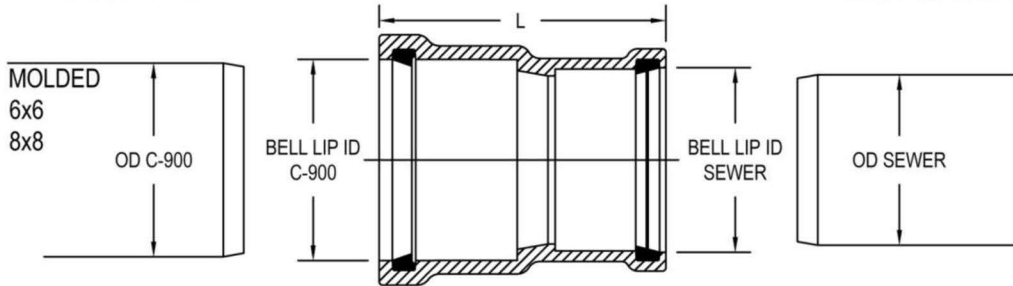

C-900 CI-SIZE

SDR-35 SEWER

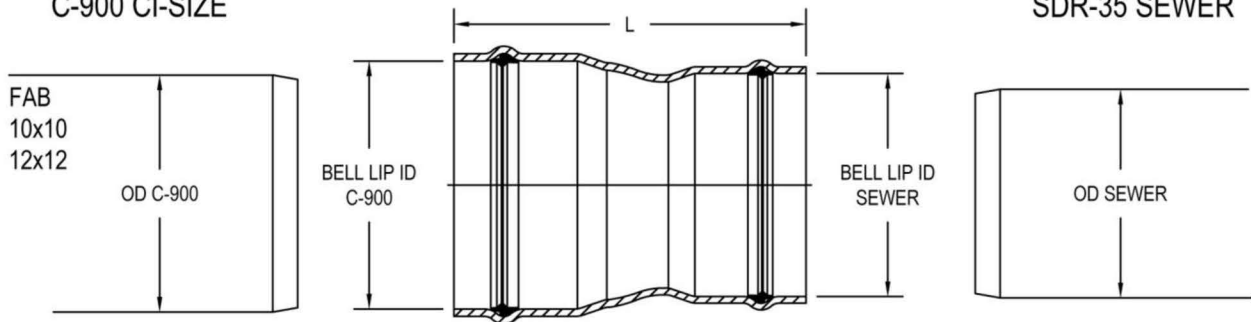

SIZE	PRODUCT NO.	OD C900	OD SEWER	BELL LIP ID C900	BELL LIP ID SEWER	L	A	CTN QTY.	CTN WT.	STYLE
4x4	18NP-39004	4.80	4.215	4.86	4.25	10.0	7.4	12	48	MOLDED
6x6	18NP-39006	6.90	6.275	6.96	6.32	11.1	7.6	6	48	MOLDED
8x8	18NP-39008	9.05	8.400	9.13	8.45	12.5	8.7	2	30	MOLDED
10x10	18NP-39010	11.10	10.500	11.20	10.60	19.5	12.0	1	12	FAB
12x12	18NP-39012	13.20	12.500	13.30	12.60	21.0	13.5	1	18	FAB

NOTE:

1. DIOD BELLS ARE INTENDED FOR USE WITH PVC, IF USED WITH DIP THE GASKET MAY NOT PROVIDE AN AIRTIGHT SEAL DUE TO THE PEENING OF THE DIP EXTERIOR. THE MATING PIPE DIAMETER SHOULD BE MEASURED TO ASSURE THAT IT CONFORMS TO THE ALLOWABLE VARIANCE. THE MATING SPIGOT SHOULD BE BEVELED 15° AND 3/4" LONG. UTILIZE WITNESS MARKS ON THE DIP EXTERIOR TO PREVENT OVER INSERTION.

Rev:

D

DWG. DATE:

2/26/96

REL. DATE:

DRAWING NUMBER

04030031

DRAWN BY:

SBR

SCALE

NONE

Effective Date:

1/2/18

MATERIAL

n/a

Harco Fittings LLC

LYNCHBURG, VIRGINIA

TITLE

C-900 x SDR-35 BxB