PROMETHEUS AI Phase 1

Sean Stappas 260639512

ECSE-498: Honours Thesis I

Supervised by: Prof. Joseph Vybihal

April 11, 2017

Abstract

Prometheus AI is a model of the human brain with the goal of controlling multiple robots in a swarm environment. This could be useful in environments hazardous for humans, such as the aftermath of a nuclear power disaster, or in outer space. The model consists of four layers: the Neural Network (NN), the Knowledge Node Network (KNN), the Expert System (ES), and the Meta Reasoner (META). The NN classifies the signals coming from the robots' sensors and sends formatted tags to the KNN. The KNN represents memory and can initiate cascaded activation of memories in the form of tags, which are passed on to the ES. The ES is a simple logic reasoner and provides a recommendation for an action to the Meta Reasoner. The META represents high-level thinking and makes an intelligent decision for what the robots should do. The assigned task this semester was to implement prototypes of the KNN and ES layers in Java. This was achieved using specific design criteria and extensive feedback from the project supervisor, Prof. Vybihal. Personal design criteria included using object-oriented programming principles, optimizing the system for speed and space efficiency, and maximizing code readability. Tests were created in TestNG and extensive documentation was written in Javadoc¹.

Acknowledgments

Elsa Riachi worked on the other two layers of the Prometheus AI (NN and META) in parallel with the work done in this report. She is also doing this project as part of an Honours Thesis. Many discussions were had together on the design of the system and how our components should fit together.

¹The Javadoc can be found here: http://cs.mcgill.ca/~sstapp/prometheus/index.html.

Contents

2 Background 4 2.1 Neural Network 4 2.2 Knowledge Node Network 4 2.3 Expert System 6 2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5.1 Javadoc 12 5.5.2 UML 12	Li	st of	Figures	3
2 Background 4 2.1 Neural Network 4 2.2 Knowledge Node Network 4 2.3 Expert System 6 2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit gration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.1.2 Expert System 14 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.	Li	st of	Tables	3
2.1 Neural Network 4 2.2 Knowledge Node Network 4 2.3 Expert System 6 2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 10 5.4.1 Unit Tests 11 5.5.D Documentation 12 5.5.1 Javadoc 12 5.5.1 Javadoc 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 T	1	Intr	oduction	4
2.2 Knowledge Node Network 4 2.3 Expert System 6 2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on So	2	Bac	kground	4
2.3 Expert System 6 2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7.1 Use of Non-renewable Resources 14 7.2 E		2.1	Neural Network	4
2.4 Meta Reasoner 7 2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.5.2 Linegration Tests 11 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.2 Environmental Benefits 14		2.2	Knowledge Node Network	4
2.5 Summary 7 3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.2 Environmental Benefits 14		2.3	Expert System	6
3 Problem 7 4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		2.4	Meta Reasoner	7
4 Design Criteria 7 4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.2 Environmental Benefits 14		2.5	Summary	7
4.1 Efficiency 7 4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.2 Environmental Benefits 14	3	Pro	blem	7
4.2 Object Oriented Design 7 4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14	4	Des	ign Criteria	7
4.2.1 Abstraction 8 4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5.1 Javadoc 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		4.1	Efficiency	7
4.2.2 Encapsulation 8 4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5.1 Javadoc 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.3 Testing 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		4.2	Object Oriented Design	7
4.2.3 Polymorphism 8 4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			4.2.1 Abstraction	8
4.2.4 Inheritance 8 5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 10 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			4.2.2 Encapsulation	8
5 Implementation 8 5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			4.2.3 Polymorphism	8
5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			4.2.4 Inheritance	8
5.1 Tags 9 5.2 Knowledge Node Network 9 5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14	5	Imp	lementation	8
5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		_		9
5.3 Expert System 10 5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		5.2	Knowledge Node Network	9
5.4 Testing 11 5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		5.3		10
5.4.1 Unit Tests 11 5.4.2 Integration Tests 11 5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		5.4		11
5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			<u> </u>	11
5.5 Documentation 12 5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			5.4.2 Integration Tests	11
5.5.1 Javadoc 12 5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		5.5		12
5.5.2 UML 12 6 Plan for Next Semester 12 6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				12
6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				12
6.1 Finalization 12 6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14	6	Pla	n for Next Semester	լ2
6.1.1 Knowledge Node Network 12 6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				
6.1.2 Expert System 14 6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				12
6.2 Integration 14 6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				
6.3 Testing 14 6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14		6.2		
6.3.1 Simulation 14 6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14				
6.3.2 Physical 14 7 Impact on Society and the Environment 14 7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14			9	
7.1 Use of Non-renewable Resources				
7.1 Use of Non-renewable Resources 14 7.2 Environmental Benefits 14	7	Imr	eact on Society and the Environment	14
7.2 Environmental Benefits	•			
		•		

	7.4 Benefits to Society	14					
8 Conclusion							
\mathbf{A}	UML Diagrams						
Re	eferences 1	18					
Li	ist of Figures						
	High-level model of the Knowledge Node of the KNN. Thinking forwards in the KNN. Thinking backwards in the KNN. Lambda thinking in the KNN. Prometheus AI model with labeled input and output. Setup for the testKNN() method. UML diagram of the tags package. UML diagram of the knn package.	4 5 5 6 8 13 16 16 17					
$\mathbf{L}_{\mathbf{i}}$	ist of Tables						
	Test setup for testES()						
Li	istings						
	Single cycle of thinking forwards in the KNN	10 10 10 10 11 11					

Abbreviations

NN Neural Network

KNN Knowledge Node Network

ES Expert System

META Meta Reasoner

OOP Object-Oriented Programming

1 Introduction

The goal of this project is to create an artificial intelligence system to control multiple robots. Applications for this type of system include robots in hazardous environments, such as in outer space (Mars, Moon, etc.), in nuclear plants after a nuclear disaster, and in military zones.

The robots themselves are expected to have a fixed front-facing camera and ultrasonic sensor(s). Each robot may have multiple fixed ultrasonic sensors pointing in different directions, or a single rotating ultrasonic sensor that sweeps the area in front of the robot. The ultrasonic sensor(s) can measure distance between the robot and nearby objects, and the camera can take images of what the robot is facing.

The structure of the system is inspired from the functionality of the human brain, and is composed of the following four layers (in order of increasing abstraction): the Neural Network (NN), the Knowledge Node Network (KNN), the Expert System (ES), and the Meta Reasoner (META), as can be seen in Figure 1. These will be described in Section 2.




Figure 1: Prometheus AI model.

2 Background

2.1 Neural Network

The NN layer (also known as the Perceptron layer) consists of a network of neurons with a similar structure to neurons in the human brain. In the context of this project, it is the interface between the robots' sensors (camera and ultrasonic) and the rest of the AI system.

The NN layer gathers raw sensor data and will build an abstract view of the robot's surrounding environment. It will analyze the contents of the camera image and achieve two main goals:

- 1. Classify objects observed in the image
- 2. Localize objects in the image

To achieve these goals, a convolutional neural network will be used. This will determine which regions of the image are important and classify objects in those regions. A 3D view of the world will also be generated. Using ultrasonic sensor readings and coordinate transformations from the world to the camera images, the observed objects can be localized in space.

Ultimately, the classification and localization of objects will produce abstract informational tags, which will be passed on to the KNN. These tags can therefore be measures of the position of an object, or other characteristics about an object.

2.2 Knowledge Node Network

The KNN layer represents memory in the human brain. It takes in the tags provided by the NN and outputs tags based on its knowledge of the environment. These output tags can be simple facts, such as "I see a wall", or can be recommendations for future actions such "turn left". These tags are passed on to the next layer, the Expert System (ES).

The KNN is based around the Knowledge Node, which is an abstract structure representing a memory and its connections to other memories. A simple model of a Knowledge Node can be seen in Figure 2.



Figure 2: High-level model of the Knowledge Node of the KNN [1].

In its simplest form, the Knowledge Node can be excited by an activated input tag, which increments its activation parameter, which initially starts at 0. If the activation parameter is greater than the node's threshold, the Knowledge Node fires, causing the activation of the output tags. This description corresponds to forwards thinking with linear activation. The activation can also be with a sigmoid function, which is more representative of neurons in the brain.

The KNN has three main ways of thinking: forwards, backwards, and lambda. The version of thinking to be done by the KNN is chosen by the META.

Forwards thinking is the simplest and was described earlier. It is depicted in Figure 3. Firing a Knowledge Node can cause forward activation of more Knowledge Nodes, hence the "forwards" naming.




Figure 3: Thinking forwards in the KNN.

Thinking backwards starts at the output tags of Knowledge Nodes, and works backwards, as can seen in Figure 4. In its simplest form, it checks output tags of Knowledge Nodes and, if all of them are active, the input tag must be active as well, so that Knowledge Node is activated.

This type of thinking can be a bit more difficult to implement than forwards thinking, since one must decide what percentage of active output tags of a Knowledge Node corresponds to an active input tag. For instance, should a Knowledge Node activate when all its output nodes are active (100%), or when 75% are active? This relates to the confidence with which the KNN believes the tag associated with that node to be true. As a concrete example, if you observe an object that has four wheels, seats, and a steering wheel, how confident are you that that object is a car? Realistically, humans with often classify what they observe with a certain uncertainty and this is what can be represented with this type of backwards thinking.

This type of thinking occurs constantly in the background in humans [1], and this is something to keep in mind during implementation.




Figure 4: Thinking backwards in the KNN.

Lambda thinking uses a combination of forwards and backwards, and can be seen in Figure 5. It is called "lambda" thinking because the shape of the thinking trajectory matches a Greek uppercase lambda (Λ). It first looks at output tags of Knowledge Nodes and propagates activation backwards, similar to backwards thinking. After a certain amount of nodes are fired, it will then start activating forwards, similar to thinking forwards. An interesting question is how far backwards should lambda thinking go before starting to cascade forwards? This relates to how general one wants to explore before searching for a more specific value.

This type of thinking occurs in humans when using analogical reasoning to solve problems [2].

In essence, when a person wants to find a solution to a problem, they will explore related problems, move their way "backwards" to concepts related to the desired problem, and think "forwards" to focus in on the desired problem.




Figure 5: Lambda thinking in the KNN.

All forms of thinking can continue until there are no more Knowledge Nodes to activate, which corresponds to natural quiescence. There can also be a fixed number of cycles through the list of active tags. This fixed cycle number represents how much effort is being put into thinking. Indeed, in animals, most thinking is never done at 100% effort, and it would be interesting to model this.

There is a strength value associated with every Knowledge Node which represents how much weight an activation has and therefore how quickly that node will fire. A simple implementation of strength would be as a constant coefficient multiplying each activation increment. So, instead of checking when the activation is greater than the threshold, one would check if activation * strength > threshold.

Confidence was mentioned earlier in the context of thinking backwards. This concept can however extend beyond this context. Indeed, every individual Knowledge Node can have a confidence value associated with it, representing how certain the KNN is that the input tag is true. These confidence values can come from the NN, since a neural network will always have a confidence value when classifying objects. When initiating a think cycle, the confidence value at each stage can be multiplied with each other, making the KNN less certain of a memory as it searches

through its tree of Knowledge Nodes. This represents memories in the human brain require a great deal of thinking to reach and, as such, are less certain than other memories.

Age represents how long it has been since a Knowledge Node has been excited. The idea is that, after a Knowledge Node has aged a certain amount of time, that node will be discarded, similarly to how old memories are discarded in the brain.

The intuitive implementation of aging is to constantly increment some age value associated with every Knowledge Node, and discard nodes whose age is greater than some threshold. The age would be reset when the node is excited. This would however be unnecessarily computationally intensive, requiring some kind of constant updating of every single node. A more efficient way of doing it would be to save a timestamp for every Knowledge Node when it is excited, and if the KNN attempts to excite a Knowledge Node whose previous timestamp value is too far into the past, that node is instead deleted.

2.3 Expert System

The ES layer is a basic logic reasoner. It is not aware of its current reality, or any context. It takes in the tags provided by the KNN and interprets them as either facts, recommendations or rules.

Facts are simple calculus predicates showing that something is true. For example, the fact (A) represents that A itself is true or active, (A=1) means that A is equal to 1, (A>1) represents that A is greater than 1, etc. As a more concrete example, a fact can represent a certain measurement, like (distance=5) representing the robot's distance from a wall as measured by one of its sensors.

Recommendations represent suggestions for actions to be taken by a robot. For example, $(\#turn_left)$ is a recommendation for a robot to turn left, if it sees a wall directly in front of it and must avoid it, for example. These are recommendations and not commands because the META can decide whether or not to actually take that

action.

Rules are a many-to-many structure with facts or recommendations as inputs and outputs. When all the input tags become active, the output tags become active and the rule itself is also said to be active. In this way, a rule can represent a logical AND of all its input tags.

The runtime of the ES consists of the following general steps [3]:

- 1. Reset
- 2. Add facts and rules
- 3. Think
- 4. Send recommendations to META

The most important part of the previous process is the thinking stage, which consists of first iterating through all the rules in the ES and checking if they are active by inspecting the lists of facts and recommendations. Rules may then become active and cause cascading activation of more rules. This can continue until there are no more rules to activate, which corresponds to natural quiescence. There can also be a fixed threshold to the number of possible cycles through the lists of facts and recommendations. In this sense, this limit represents the effort put into thinking, similarly to the KNN.

These recommendations are passed on to the final layer, the Meta Reasoner (META).

2.4 Meta Reasoner

The META layer represents high-level reasoning in human brains. It is aware of its environment and context, and makes decisions based on what it believes to be right. It is paranoid, and constantly checks whether the tags reported by the rest of the AI system make sense based on its expected view of the world. If it decides to make a decision, it sends a command to the actuators of the robots to decide how to move. If it is not happy with the recommendation(s) from the ES, it may initiate another think cycle in the KNN to generate new recommendations(s).

2.5 Summary

With this full description of the Prometheus AI model, the system with labeled input and output can be seen in Figure 6.

3 Problem

The assigned task was to construct two out of the four layers listed in Section 2: the Expert System (ES), and the Knowledge Node Network (KNN). The other two layers are to be completed by another Honours Thesis student.

As a deliverable for the end of this first semester, it was required to complete a prototype of these two layers, with basic versions of the functionality described in Section 2. This was to be done entirely in Java.

4 Design Criteria

4.1 Efficiency

A very important consideration when designing the system is speed. Since the robots may have to react very quickly to stimulus in the environment, the reasoning in the AI must be as fast as possible. This is especially true in the hazardous environments for which this system could be useful for, as specified in Section 1. An example of a design choice that was made to improve speed is the use of Java Sets for most of the collections in the ES and KNN layers. The original specifications mentioned using ArrayLists, but, since there is no specific iteration order necessary for most operations in the ES and KNN, these collections were changed to Sets.

When designing every algorithm in the system, the first criterion in mind is speed. Indeed, for the think() methods of the ES and KNN, it was important to think about the right way to leverage all the available data structures to maximize speed.

4.2 Object Oriented Design

Another important choice is to leverage object-oriented design as much as possible.

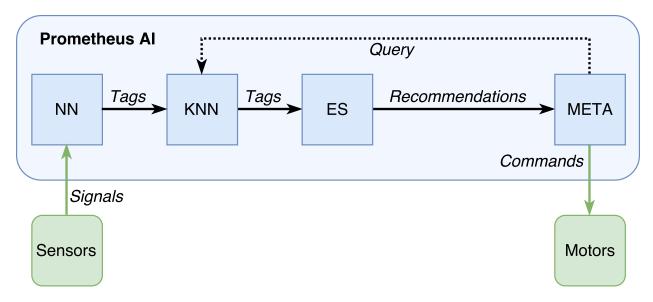


Figure 6: Prometheus AI model with labeled input and output.

Object-oriented programming (OOP) allows extensive planning before even beginning to write code, which can identify any flaws in the initial design. It also allows the code to be very clean and reusable. Since Java is the programming language chosen for the project, OOP is also the natural way to proceed. To follow OOP, the ES and KNN will be designed around Java classes and the methods associated with those classes. OOP principles such as polymorphism and encapsulation will be followed closely.

4.2.1 Abstraction

One important design aspect is that the system should be as abstract as possible, while still performing its desired task. For instance, the system should be general enough to perform under simulations, as well as in real-life environments. It should also ideally be able to perform in vastly different environments, with different tasks.

One example of making use of abstraction is the choice to create a PrometheusLayer interface for both the ES and KNN, since they share some functionality, like the ability to think.

4.2.2 Encapsulation

Each layer of the system has unique, localized functionality that does not need to be visible from the rest of the system. For instance, the intricacies of the think() method in the ES and KNN layers do not need to be known to the rest of the system.

4.2.3 Polymorphism

Many methods in the system can have different functionality depending on context. For instance, the think() method in the KNN and ES layers can take an optional number of think cycles to specify a threshold for quiescence.

4.2.4 Inheritance

Careful thought was put into how objects may inherit functionality from each other. This can most clearly be seen with the implementation of the tags, which will be described in Section 5.

5 Implementation

The details of how the KNN and ES were implemented in Java will now be discussed.

5.1 Tags

The entire system revolves around tags passed from layer to layer. For this reason, a lot of thought was put into the proper design of these tags. To leverage OOP principles and readability, it was decided to implement these tags with a Tag class in Java, with Fact, Rule and Recommendation subclasses.

The tags described in Section 2 need to be as general as possible. A natural choice for this structure would be a Java String, which would be relatively simple to pass around the system. However, these tags represent various concepts; each tag can either be a fact, a recommendation, or a rule. If implemented as Strings, the tags would have to be encoded on creation to represent each concept and decoded on use to retrieve the important information. This seems like a bad use of the OOP principles of Java. For this reason, the tags are instead implemented using a Tag Java class, with Recommendation, Fact, and Rule subclasses. This should also make manipulating the Tags faster, while incurring a slight memory overhead. To store these Tags in a database, they can be converted to JSON format. On read from the database, they can be easily decoded.

The Tag class itself was made abstract. This means that an object may not be directly instantiated as a Tag, but must be instantiated as one of its subclasses. This makes sense, since a tag *must* be one of the three types: rule, recommendation or fact.

All of these classes were placed inside the tags package. A UML diagram of the tags package can be seen in Figure 8 of the Appendix.

5.2 Knowledge Node Network

All code relating directly to the KNN was placed in the knn package of the project. A UML diagram of the knn package can be seen in Figure 9 of the Appendix.

The KNN layer is based around the KnowledgeNodeNetwork Java class. This class has the following fields:

mapkn Map of input Tags to associated as a parameter.

KnowledgeNodes

activeTags Set of active Tags, corresponding to input Tags of fired KnowledgeNodes

The KnowledgeNode class implements the functionality of a Knowledge Node, which has the following important fields implemented functionality described in Section 2:

inputTag input Tag.

outputTags Array of output Tags.

activation int starting at 0, incrementing when the KnowledgeNode is excited.

threshold int threshold such that activation \geq threshold causes firing of the KnowledgeNode.

strength int that biases the activation of
 a KnowledgeNode, causing early
 firing. Simple implementation:
 if activation * strength ≥
 threshold then fire the KN.

confidence int representing the belief that inputTag is true (0 to 100%).

age int representing the age of the KnowledgeNode.

The important method in most the KnowledgeNodeNetwork is think(), which chooses either thinkForwards(), thinkBackwards(), or thinkLambda(). These methods implement the functionality described in Section 2 and return the Tags activated as a result of thinking.

Without a parameter, the think() method runs to natural quiescence. There is also an overloaded version of think() that takes an int numberOfCycles as a parameter. This parameter represents the thinking effort described earlier. Similarly, thinkForwards(), thinkBackwards(), and thinkLambda() all have overloaded versions with numberOfCycles as a parameter.

Currently, only the thinkForwards() method is fully completed. The version of the method that runs until quiescence can be seen in Listing 1.

Listing 1: Thinking forwards until quiescence in the KNN.

```
private Set<Tag> thinkForwards() {
   Set<Tag> totalActivatedTags = new HashSet<>();
   Set<Tag> activatedTags;
   do {
       activatedTags = forwardThinkCycle();
       totalActivatedTags.addAll(activatedTags);
   } while (!activatedTags.isEmpty());
   return totalActivatedTags;
```

The version of thinkForwards() with a fixed number of thinking cycles can be seen in Listing 2.

Listing 2: Thinking forwards for a fixed number of cycles in the KNN.

```
private Set<Tag> thinkForwards(int numberOfCycles) {
   Set<Tag> totalActivatedTags = new HashSet<>();
   for (int i = 0; i < numberOfCycles; i++) {</pre>
       Set<Tag> activatedTags = forwardThinkCycle();
       if (activatedTags.isEmpty()) {
           break;
       7
       totalActivatedTags.addAll(activatedTags);
   return totalActivatedTags;
}
```

One can see that the thinkForwards() methods repeatedly call forwardThinkCycle(), which can be seen in Listing 3. This method is where Tags can become active, being added into the activeTags Set.

Listing 3: Single cycle of thinking forwards in the KNN.

```
private Set<Tag> forwardThinkCycle() {
   Set<Tag> pendingActiveTags = new HashSet<>();
   for (Tag t : activeTags) {
       if (mapKN.containsKey(t)) {
          pendingActiveTags.addAll(excite(mapKN.get(t)));
   activeTags.addAll(pendingActiveTags);
   return pendingActiveTags;
```

One can see that the forwardThinkCycle() calls an excite() method to excite a This method returns the KnowledgeNode. Tags activated as a result of excitation. The either thinkForwards(), thinkBackwards(),

code can be seen in Listing 4.

Listing 4: Method to excite a Knowledge Node.

```
private Set<Tag> excite(KnowledgeNode knowledgeNode) {
   Set<Tag> pendingActiveTags = new HashSet<>();
   knowledgeNode.activation++;
   if (knowledgeNode.activation >=
        knowledgeNode.threshold) {
       pendingActiveTags = fire(knowledgeNode);
   }
   return pendingActiveTags;
}
```

This method, in turn, may call a fire() method to fire the KnowledgeNode and activate its output tags. It returns all the Tags to be activated as a result of firing that KnowledgeNode. The code can be seen in Listing 5.

Listing 5: Method to fire a Knowledge Node, activating its output tags.

```
private Set<Tag> fire(KnowledgeNode knowledgeNode) {
   Set<Tag> pendingActiveTags = new HashSet<>();
   for (Tag outputTag : knowledgeNode.outputTags) {
       if (!activeTags.contains(outputTag)) {
           pendingActiveTags.add(outputTag);
   }
   return pendingActiveTags;
}
```

Expert System

All code relating directly to the ES was placed in the es package of the project. A UML diagram of the es package can be seen in Figure 10 of the Appendix.

The ES layer based around is ExpertSystem Java class. This class has the following fields:

```
readyRules
                  Set of Rules that have not
                  been activated yet.
                  Set of active Rules.
activeRules
                  Set of active Facts.
facts
recommendations Set
                              of
                                        active
                  Recommendations.
```

The most important method ExpertSystem is think(), which chooses or thinkLambda(). These methods implement the functionality described in Section 2.

Without a parameter, the think() method runs to natural quiescence. This can be seen in Listing 6.

Listing 6: Thinking until quiescence in the ES.

```
public Set<Tag> think() {
    Set<Tag> allActivatedTags = new HashSet<>();
    Set<Tag> activatedTags;
    do {
        activatedTags = thinkCycle();
        allActivatedTags.addAll(activatedTags);
    } while (!activatedTags.isEmpty());
    Set<Tag> activatedRecommendations = new
        HashSet<>();
    for (Tag tag : allActivatedTags) {
        if (tag.isRecommendations) activatedRecommendations.add(tag);
    }
    return activatedRecommendations;
}
```

There is also an overloaded version of think() that functions similarly to that of the KnowledgeNodeNetwork. This can be seen in Listing 7. Both variants of think() return the Set of Recommendations that become active as a result of thinking, which is passed on to the META.

Listing 7: Thinking with a fixed number of cycles in the ES.

```
public Set<Tag> think(int numberOfCycles) {
    SetTag> allActivatedTags = new HashSet<>();
    for (int i = 0; i < numberOfCycles; i++) {
        Set<Tag> activatedTags = thinkCycle();
        if (activatedTags.isEmpty())
            break;
        allActivatedTags.addAll(activatedTags);
    }
    Set<Tag> activatedRecommendations = new
        HashSet<>();
    for (Tag tag : allActivatedTags) {
        if (tag.isRecommendation))
            activatedRecommendations.add(tag);
    }
    return activatedRecommendations;
}
```

Both versions of think() call a method named thinkCycle() representing a single cycle of thinking. The code for this method can be seen in Listing 8. This is the method where Rules and Recommendations can become active within the ES.

Listing 8: A single cycle of thinking in the ES.

```
private Set<Tag> thinkCycle() {
   Set<Tag> activatedTags = new HashSet<>();
   Set<Rule> pendingActivatedRules = new HashSet<>();
   for (Rule rule : readyRules) {
       boolean shouldActivate = true;
       for (Tag condition : rule.inputTags) {
           if (!facts.contains(condition) &&
                !recommendations.contains(condition))
              shouldActivate = false;
              break;
       }
       if (shouldActivate)
          pendingActivatedRules.add(rule);
   for (Rule rule : pendingActivatedRules) {
       readyRules.remove(rule);
       activeRules.add(rule);
       for (Tag outputTag : rule.outputTags) {
          if (!facts.contains(outputTag) &&
               !recommendations.contains(outputTag))
              activatedTags.add(outputTag);
              if (outputTag.isRecommendation())
                   recommendations.add((Recommendation)
                   outputTag);
              else if (outputTag.isFact())
                   facts.add((Fact) outputTag);
   }
   return activatedTags;
```

5.4 Testing

All tests on the system were conducted using the TestNG framework in Java, which provides a simple and intuitive way to create assertions in tests. These tests were placed in the test package of the project. A UML diagram of the test package can be seen in Figure 11 of the Appendix.

5.4.1 Unit Tests

Unit tests were generated for the KNN and ES to test every single method on its own.

5.4.2 Integration Tests

Integration tests were made to test the combined functionality of the KNN and ES.

The test setup for the testKNN() method can be seen in Figure 7. Every node has a threshold

value of 1 to simplify the activation. The system starts out with A as the only active Tag, and testKNN() with think() until quiescence. It is therefore expect all the Tags shown in Figure 7 to become active at the end. The initial and final states are both asserted with TestNG in testKNN(), with positive results.

The test setup for the testES() method can be seen in Table 1. The columns from left to right correspond to the elements in the readyRules, the activeRules, the facts, and the recommendations respectively. The first row corresponds to the initial setup of the ES, and the last row corresponds to the expended final state. Both the initial and final states are asserted with TestNG in testES(), with positive results.

The testKNNandES() method has the same setup as testKNN() in Figure 7, except the output active Tags from the KNN are passed on to the ES. The resulting setup and activation in the ES can be seen in Table 2.

5.5 Documentation

Proper documentation of the source code is very important. This is to ensure that anyone wanting to work with the code which was designed has an easy time doing so. Also, for anyone wanting to understand how the system works, documentation is essential. This documentation was achieved through Javadoc and UML diagrams.

5.5.1 Javadoc

Extensive Javadoc was generated for the entire code base. This can be found here: http://cs.mcgill.ca/~sstapp/prometheus/index.html. The functionality of every single class and method was described in detail.

5.5.2 UML

UML diagrams of every package in the code base were created.

6 Plan for Next Semester

The plan for next semester is to finalize the two layers that were started this semester, and to test them on the robots available in Prof. Vybihal's lab.

6.1 Finalization

First, the KNN and ES will need to be finalized. It is expected that this will take up the first month of next semester.

6.1.1 Knowledge Node Network

Many complex features of the KNN layer are still to be implemented, such as backwards and lambda thinking, confidence, and aging.

Backwards thinking can be implemented using a background thread in Java, constantly running in the background at some rate.

Some thought still needs to be put into the specifics on implementation of lambda thinking. Most importantly, the use cases of lambda thinking will have to be well understood and described.

Confidence values will probably be associated with every individual Tag, as well as in an absolute sense in the KNN. Activation through the layers of the KNN can theoretically then reduce the absolute confidence that the output Tags are true, since at every step the confidence should be multiplied with the previous value.

Aging is also still left to be implemented, with a timestamp system as described in Section 2.

Activation of Knowledge Nodes with sigmoid functions can also be looked into. This can be easily implemented using a cache of known sigmoid values.

Also, more thought will have to be put into the design of the KNN to allow cyclic graphs, representing recursive memories in the human brain.

Finally, there will be more features to be added in the KNN which are not described in Section 2, since they are still in the process of being thought out. One of these features is how the KNN will learn.

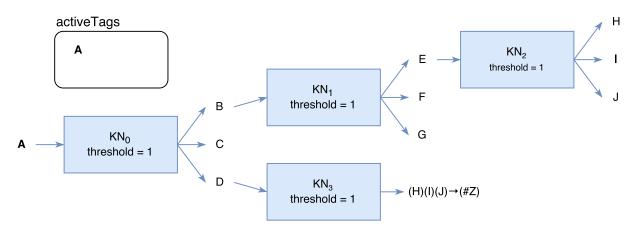


Figure 7: Initial setup for the testKNN() method.

Ready Rules	Active Rules	Active Facts	Active Recommendations
$(A)(B) \to (D)$ $(D)(B) \to (E)$ $(D)(E) \to (F)$ $(G)(A) \to (H)$ $(\#X)(\#Y) \to (\#Z)$		(A),(B)	(#X), (#Y)
:	÷	:	<u>:</u>
$(G)(A) \to (H)$	$(A)(B) \to (D)$ $(D)(B) \to (E)$ $(D)(E) \to (F)$ $(\#X)(\#Y) \to (\#Z)$	(A), (B), $(D), (E)$ (F)	(#X), (#Y), (#Z)

Table 1: Test setup for testES(). Middle activation steps omitted.

Cycle	Ready Rules	Active Rules	Active	Active
Cycle			\mathbf{Facts}	Recommendations
			(B),(C),(D)	
1	$(H)(I)(J) \to (\#Z)$		(E),(F),(G)	
			(H),(I),(J)	
			(B),(C),(D)	
2		$(H)(I)(J) \to (\#Z)$	(E),(F),(G)	(#Z)
			(H),(I),(J)	

Table 2: Test setup and activation for the ES portion of testKNNandES().

6.1.2 Expert System

Some features of the ES layer are still to be implemented, such as more complex Fact checking. Indeed, currently, the ES only checks for strict equality between Facts, but it would be interesting to implement checking for "greater than" or "less than" relations as well.

6.2 Integration

One very important task left to be done is to integrate the two layers described in this report (ES and KNN) with the other layers developed separately (NN and META). Ideally, the layers should be able to work together, but there will surely be some conflicts at the interface of the layers. These will have to be resolved when the time comes.

Most notably, the interface between the NN and the KNN will have to be tested. There may have to be some conversion between what the NN will output and what the KNN expects (Tags).

The integration section is expected to take around 2 months, with the first month overlapping with the finalization section.

6.3 Testing

Finally, the system will have to be tested. This is expected to take around 2 months, with the first month overlapping with the last month of integration.

6.3.1 Simulation

Once all the layers are functioning together, they can be tested. The first and easiest way to test would be in a simulated environment. One simulator that may be used is Simbad, which is a Java 3D robot simulator [4]. This can allow for some early debugging and fixes.

6.3.2 Physical

One the simulation testing is completed and working properly, the system can be tested in the lab. Prof. Vybihal's lab has multiple robots with ultrasonic sensors, and these will be the test subjects of this phase.

7 Impact on Society and the Environment

7.1 Use of Non-renewable Resources

As a purely software-oriented project, there are no physical materials needed to construct this system.

7.2 Environmental Benefits

The system could be used as a tool to control robots in dangerous environments such as nuclear plants after a radioactive disaster. Indeed, the system could coordinate robots to help contain the damage faster than humans could, thus limiting the risk on the environment.

7.3 Safety and Risk

It is critical that, once this system is completed, it is used in an ethical way, and for the right purposes.

One example of use that may cause ethical concern is in a military setting, where an AI system like the one described here could be used in a battlefield in place of soldiers.

In the very long term, there are concerns with the possibility that an AI system might achieve intelligence and awareness close to a human. If such an AI were to obtain "consciousness" in its own way, should that entity be entitled to its own rights, like humans do?

7.4 Benefits to Society

This type of system could be extremely useful in many contexts in society.

Going back to the example use case in a radioactive disaster, the system could be used to send robots in an area that would otherwise be very dangerous for humans. This would therefore help prevent the unnecessary loss of life in cleaning up these leaks.

The system could also be used to further space exploration, with an intelligent AI controlling multiple robots exploring the surface of Mars, for instance. The value of AI in this context has been clearly shown, with the Mars Cu-

riosity rover recently being upgraded to have its own AI system using computer vision to identify rocks [5].

8 Conclusion

This semester, prototypes of the Expert System (ES) and Knowledge Node Network (KNN) layers of the AI model were completed in Java. These prototypes were tested individually and together, with positive results.

The main goal for next semester is to finalize the entire system, implementing more complex features that were omitted for this prototype stage. This will also require proper integration between the work done in this report (KNN and ES), and outside this report (NN and META).

A UML Diagrams

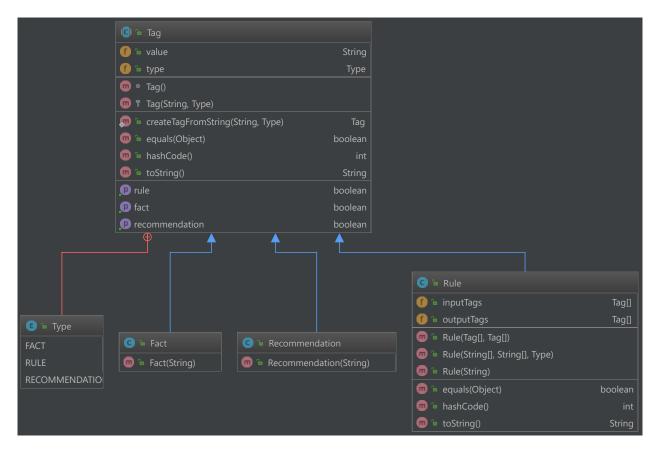


Figure 8: UML diagram of the tags package.

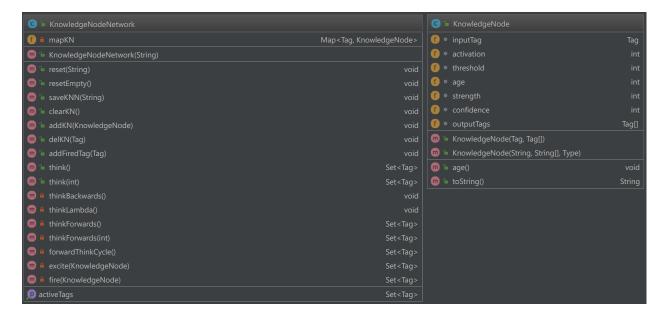


Figure 9: UML diagram of the knn package.

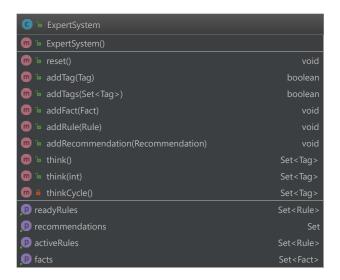


Figure 10: UML diagram of the es package.

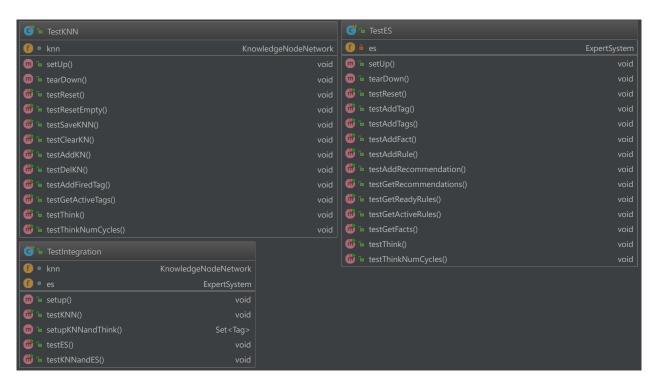


Figure 11: UML diagram of the test package.

References

- [1] J. Vybihal, "Knowledge nodes," 2017.
- [2] J. Vybihal and T. R. Shultz, "Search in analogical reasoning," 1990.
- [3] J. Vybihal, "Expert systems," 2016.
- [4] "Simbad 3d robot simulator," http://simbad.sourceforge.net/index.php, (Accessed on 03/27/2017).
- [5] "How does mars rover curiosity's new ai system work? astronomy.com," http://www.astronomy.com/news/2016/08/how-does-mars-rover-curiositys-new-ai-system-work, (Accessed on 04/07/2017).