PROMETHEUS AI Phase 2

 $\begin{array}{c} {\rm Sean~Stappas} \\ 260639512 \end{array}$

ECSE-498: Honours Thesis I

Supervised by: Prof. Joseph Vybihal

December 7^{th} , 2017

Abstract

Prometheus AI is a model of the human brain with the goal of controlling and coordinating multiple robots in different environments. This could be useful in environments hazardous for humans, such as in the aftermath of a nuclear power disaster, or in outer space. The model consists of four layers: the Neural Network (NN), the Knowledge Node Network (KNN), the Expert System (ES), and the Meta Reasoner (META). The NN classifies the signals coming from the robots' sensors and sends formatted tags to the KNN. The KNN represents memory and can initiate cascaded activation of memories in the form of tags, which are passed on to the ES. The ES is a simple logic reasoner and provides recommendations for actions to the META. The META represents high-level thinking and makes an intelligent decision for the robots. The assigned task this semester was to implement prototypes of the KNN and ES layers in Java. This was achieved using specific design criteria and extensive feedback from the project supervisor, Prof. Vybihal. Personal design criteria included using object-oriented programming principles, optimizing the system for speed and space efficiency, and maximizing code readability. Tests were created in TestNG and extensive documentation was written in Javadoc.

Acknowledgments

Under my supervision, several undergraduate students worked on the Prometheus layers in Prof. Vybihal's lab. Over the summer, Isaac Sultan and Si Yi Li made contributions to the ES and KNN layers, respectively. This semester, Mohammad Owais Kerney and Michael Ding made initial contributions to the NN and META layers, respectively.

Contents

List of Figures							
Li	st of	Tables	3				
1	Inti	roduction	4				
2	Bac	ckground	4				
	2.1	Neural Network	4				
	2.2	Knowledge Node Network	5				
	2.3	Expert System	7				
	2.4	Meta Reasoner	7				
	2.5	Summary	8				
3	\mathbf{Pro}	oblem	8				
4	Des	sign	8				
	4.1	Efficiency	8				
	4.2	Object Oriented Programming	8				
	4.3	Readability & Documentation	8				
	4.4	Testing	8				
5	Implementation						
	5.1	Tags	8				
	5.2	Knowledge Node Network	9				
	5.3	Expert System	11				
	5.4	Testing	11				
	5.5	Documentation	13				
6	Res	sults & Tests	13				
7	Imr	pact on Society and the Environment	13				
	7.1	·	13				
	7.2	Environmental Benefits	13				
	7.3	Safety and Risk	13				
	7.4	·	14				
8	Cor	nclusion	14				
${f A}$	$\mathbf{U}\mathbf{M}$	IL Diagrams	15				
			10				
K	eiere	ences	16				
\mathbf{L}	ist (of Figures					
	1	Prometheus AI model	4				
	2	High-level model of the Knowledge Node of the KNN	5				
	3	Thinking forwards in the KNN	6				
	4	Thinking backwards in the KNN	6				

5	Lambda thinking in the KNN	
6	Prometheus AI model with labeled input and output	9
7	Setup for the testKNN() method	12
List	of Tables	
1	Test setup for testES()	12
2	Test setup and activation for the ES portion of testKNNandES()	12
Listi	inge	
Lisu	nigs	
1	Method to think forwards until natural quiescence in the KNN	10
2	Method to think forwards for a fixed number of cycles in the KNN	
3	Method to think forwards for a single cycle in the KNN	10
4	Method to excite a KN	11
5	Method to fire a KN	11
6	Method to think until natural quiescence in the ES	11
7	Method to think for a fixed number of cycles in the ES	11
8	Method to think for a single cycle in the ES	
9	Method to add a Tag to the ES	

Abbreviations

The following abbreviations will be used throughout the report:

NN Neural Network.

KNN Knowledge Node Network.

KN Knowledge Node.

ES Expert System.

META Meta Reasoner.

OOP Object-Oriented Programming.

1 Introduction

The goal of this project is to create an artificial intelligence system called Prometheus to control and coordinate multiple robots. The robots themselves are expected to be relatively simple and to not make any decisions themselves. All the thinking and decision-making is done by Prometheus, which collects data from all the robots' sensors.

Applications for this type of system include robots in hazardous environments, such as in outer space (Mars, Moon, etc.), in nuclear plants after a nuclear disaster, and in military zones. The system could ideally learn from this data in a given environment and apply its learning to new environments.

The system is inspired from the functionality of the human brain, and is composed of the following four layers [1]: the Neural Network (NN), the Knowledge Node Network (KNN), the Expert System (ES), and the Meta Reasoner (META), which can be seen in Figure 1.




Figure 1: Prometheus AI model.

The theory needed to understand these four layers will be given in Section 2. The assigned task will then be described in Section 3. Personal design criteria will be discussed in Section 4. The description of the work done this semester can be found in Section 5, and the plan for next semester is laid out in ??. Finally, the possible future impact of this project on society and the environment will be explored in Section 7.

2 Background

2.1 Neural Network

The NN layer consists of a network of neurons with a structure similar to neurons in the human brain. It is the interface between the robots' sensors and the rest of the AI system.

The robots in Prof. Vybihal's lab are equipped with two types of sensors: camera and ultrasonic. The ultrasonic sensor can measure distance between the robot and nearby objects, and the camera can take images of what the robot is facing.

The NN gathers raw sensor data and will build an abstract view of the robot's surrounding environment. For each camera image, it will achieve two main goals:

- 1. Classify objects observed in the image.
- 2. Localize objects in the image.

To achieve these goals, a convolutional neural network will be used, which can determine which regions of the image are important and classify objects in those regions [2]. A 3D view of the world will also be generated. Using ultrasonic sensor readings and coordinate transformations from the world to the camera images, the observed objects can be localized in space.

Ultimately, the classification and localization of objects will produce abstract informational tags, which will be passed on to the KNN. These tags can therefore be characteristics of objects in the world, such as distance.

2.2 Knowledge Node Network

The KNN layer represents memory in the human brain. It takes in the tags provided by the NN and outputs tags based on its knowledge of the environment. The KNN is based around interconnected Knowledge Nodes (KNs), which are abstract structures representing memories and their connections to other memories. A simple model of a Knowledge Node (KN) can be seen in Figure 2.



Figure 2: High-level model of the Knowledge Node (KN) of the KNN [3].

KNs have an input tag representing some information, and output tags representing information related to the input tag. Tags in the KNN can become "active", meaning that they are observed or seen as true. For example, if the NN determines that it observes a ball and passes that information on to the KNN, then a "ball" tag may become active in the KNN. This would excite the KN with input tag "ball". If that KN fires, other tags related to that observation can become active. For example, tags representing ball characteristics such as "round object" may become active. This tag in turn may be connected to another KN, potentially causing more activation.

There are different ways that KN excitation could be implemented. With simple linear activation, excitation would increment the node's activation parameter, which initially starts at 0. If $activation \geq threshold$, the KN fires, causing the activation of the output tags. This description corresponds to forwards thinking. The activation can also be achieved using a sigmoid function, which is more representative of neurons in the brain [4].

There is a strength value associated with every KN which represents how much weight an ac-

tivation has and therefore how quickly that node will fire. A simple implementation of strength would be as a constant coefficient multiplying the activation parameter. So, instead of checking when the activation is greater than the threshold, one would check if $activation*strength \geq threshold$, where the strength is positive. The strength value could be 0 however, which effectively shuts off the KN. Another way of implementing strength is to check $activation + strength \geq threshold$. In this case, strength can be negative and make the KN fire later than normal.

Strength can be seen as the firing predisposition of neurons in the brain as a result of learning [3]. Indeed, learning can increase the synaptic strength between neurons and cause early firing of those neurons [5]. For example, a person who has had a bad experience with spiders would fire their fear response upon seeing a spider more quickly than one without that fear.

Every KN can have a confidence value associated with it, representing how certain the KNN is that the input tag is true. In this case, the confidence value would be stored within the KN itself. These confidence values can come from the NN, since a neural network can have a confidence value when classifying objects. When initiating a think cycle, the confidence values at each stage can be multiplied with each other to produce a new confidence value, making the KNN less certain of a memory as it searches through its tree of KNs. This represents how belief changes when thinking. Indeed, some memories in the brain require a great deal of thinking to reach and, as such, can be less certain than other memories. This can lead to the recollection of false memories [6].

Age represents how long it has been since a KN has been excited. The idea is that, after a KN has aged a certain amount of time, that node will be discarded, similarly to how old memories are discarded in the brain [7]. The intuitive implementation of aging is to constantly increment some age value associated with every KN, and discard nodes whose age is greater than some threshold. The age would be reset to 0 when the node is excited. This would however be unneces-

sarily computationally intensive, requiring some kind of constant updating of every single node. A more efficient way of doing it would be to save a timestamp for every KN when it is excited, and if the KNN attempts to excite a KN whose previous timestamp value is too far into the past, that node is instead deleted.

Thinking in the KNN represents an activation routine, which activates tags and potentially fires KNs. The KNN has three main ways of thinking: forwards, backwards, and lambda. The version of thinking to be done by the KNN is chosen by the META.

Forwards thinking is the simplest and is depicted in Figure 3. Firing a KN can cause forward activation of more KNs, hence the "forwards" naming.




Figure 3: Thinking forwards in the KNN.

Thinking backwards starts at the output tags of KNs, and works backwards, as can seen in Figure 4. In its simplest form, it checks output tags of KNs and, if all of them are active, the input tag must be active as well, so that KN is fired.




Figure 4: Thinking backwards in the KNN.

This type of thinking can be more difficult to implement than forwards thinking, since one must decide what percentage of active output tags of a KN corresponds to an active input tag. For instance, should a KN fire when 100% of its output nodes are active, or when 75% are active? This relates to the confidence with which the KNN believes the tag associated with that node to be true. As a concrete example, if you observe an object that has four wheels, seats, and a steering wheel, how confident are you that that object is a car? Realistically, humans will often classify what they observe with some uncertainty [8] and this can be represented with backwards thinking. This type of thinking occurs constantly in the background in humans [3], and this is something to keep in mind during implementation.

Lambda thinking uses a combination of forwards and backwards, and can be seen in Figure 5. It is called "lambda" thinking because the shape of the thinking trajectory matches a Greek uppercase lambda (Λ). It first looks at output tags of KNs and propagates activation backwards, similar to backwards thinking. After a certain amount of nodes are fired, it will then start activating forwards, similar to thinking forwards. An interesting question is how far backwards should lambda thinking go before starting to cascade forwards? This relates to how general one wants to explore before searching for a more specific value.




Figure 5: Lambda thinking in the KNN.

This type of thinking occurs in humans when using analogical reasoning to find a memory [9]. In essence, when a person wants to locate a mem-

ory that is not directly accessible, they will explore related memories, move their way "backwards" to concepts related to the desired memory, and think "forwards" to focus in on the desired memory. For example, if one is asked where they were in 2002 on a specific date, they most likely would not remember. If they explore related dates and events in their life, however, they may be able to narrow down and extract that memory. In the context of the Prometheus system, lambda thinking will be attempted if all other forms of thinking fail (forwards and backwards).

All forms of thinking can continue until there are no more KNs to activate, which corresponds to natural quiescence. There can also be a fixed number of thinking cycles, which represents how much effort is being put into thinking. Indeed, in humans, thinking is done with varying degrees of effort [10], and it would be interesting to model this.

The result of all forms of thinking is a collection of activated tags, which are passed on to the ES.

2.3 Expert System

The ES layer is a basic logic reasoner. It is not aware of its current reality or any context. It takes in the tags provided by the KNN and interprets them as either facts, recommendations or rules.

Facts are simple calculus predicates showing that something is true. Here are some examples of fact tags and their meanings:

(A) A itself is true or active.

(A=1) A is equal to 1.

(A > 1) A is greater than 1.

(A?) A can take any value.

As a more concrete example, a fact can represent a certain measurement, like (distance = 5) representing the robot's distance from a wall as measured by one of its sensors.

Recommendations represent suggestions for actions to be taken by a robot. For example,

 $(\#turn_left)$ is a recommendation for a robot to turn left, if it sees a wall directly in front of it and must avoid it, for example. These are recommendations and not commands because the META can decide whether or not to actually take that action.

Rules are many-to-many structures with facts as inputs and tags as outputs. This can be seen in Equation (1), where $m \geq 1$ and $n \geq 1$, i.e., there must be at least one input fact and one output tag. Each output tag can either be a fact or a rule. When all the input facts become active, the output tags become active and the rule itself is said to be active. In this way, a rule can represent a logical AND of all its input facts.

$$Fact_1 \cdots Fact_m \to Tag_1 \cdots Tag_n$$
 (1)

The runtime of the ES consists of the following general steps [11]:

- 1. Reset.
- 2. Add facts and rules.
- 3. Think.
- 4. Send recommendations to META.

The most important part of the previous process is the thinking stage, which represents the activation routine of the ES. This consists of first iterating through all the rules in the ES and checking if they are active by inspecting the lists of facts and recommendations. Rules may then become active and cause cascading activation of more rules. This can continue until there are no more rules to activate, which corresponds to natural quiescence. There can also be a fixed number of thinking cycles, which represents the effort put into thinking, similarly to the KNN. The recommendations activated as a result of thinking are passed on to the final layer, the META.

2.4 Meta Reasoner

The META layer represents high-level reasoning in the human brain. It is aware of its environment and context, and makes decisions based

on what it believes to be right. It is paranoid, and constantly checks whether the tags reported by the rest of the AI system make sense based on its expected view of the world. If it decides to make a decision, it sends a command to the actuators of the robots to decide how to move. If it is not happy with the recommendations from the ES, it may send a query back to the KNN to initiate another think cycle and generate new recommendations.

2.5 Summary

With this full description of the Prometheus AI model, the system with labeled input and output can be seen in Figure 6.

3 Problem

The assigned task this semester is to construct Java prototypes of the KNN and ES. The requirements are that these prototypes should contain basic versions of the functionality described in Section 2. Since the system is to be designed from scratch, the specific design and implementation criteria are to be determined, and will be discussed in Section 4.

The NN and META are to be completed by another Honours Thesis student and will be integrated with the KNN and ES next semester (see ??).

4 Design

4.1 Efficiency

A very important consideration when designing the system is speed. Since the robots may have to react very quickly to stimuli in the environment, the reasoning in the AI must be as fast as possible. This is especially true in the hazardous environments for which this system could be useful for, as specified in Section 1.

4.2 Object Oriented Programming

Another important design choice is to leverage object-oriented programming (OOP) as

much as possible. OOP allows extensive planning before even beginning to write code, which can identify any flaws in the initial design. It also allows the code to be very clean and reusable [12]. Since Java is the programming language chosen for the project, OOP is also the natural way to proceed. OOP principles such as polymorphism and encapsulation will be followed closely. One important OOP principle to use is abstraction. Indeed, the system should be as abstract as possible, while still performing its desired task. For instance, the system should be general enough to perform under simulations, as well as in real-life environments. It should also ideally be able to perform in vastly different environments, with varying tasks. Encapsulation can also be very useful, since each layer of the system has unique, localized functionality that does not need to be visible from the rest of the system.

4.3 Readability & Documentation

One final design criterion is that the code written should be very easy to understand. This means implementing each method and class in the most intuitive way possible and providing good documentation to support the code. This is to ensure that anyone wanting to work with the code or looking to understand how the system works has an easy time doing so.

Talk
about
more
complex
principles
(Liskov,
dependency inversion,
injection,
SOLID)

4.4 Testing

5 Implementation

5.1 Tags

As described in Section 2, the entire system revolves around tags passed from layer to layer. For this reason, a lot of thought was put into the proper design of these tags.

The tags need to be as general as possible. A natural choice for this structure would be a Java String, which would be relatively simple to pass around the system. However, these tags

BDD, test coverage requirement

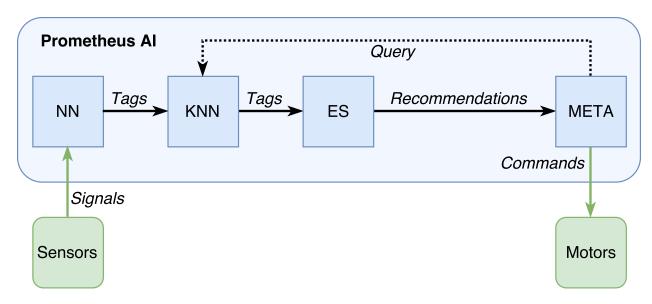


Figure 6: Prometheus AI model with labeled input and output.

represent various concepts; each tag can either be a fact, a recommendation or a rule. If implemented as Strings, the tags would have to be encoded on creation to represent each concept and decoded on use to retrieve the important information. This seems like a bad use of the OOP principles of Java. Furthermore, if specific functionality is needed in the future for each tag type, that can easily be implemented with a Java class. For these reasons, the tags are implemented using a Tag Java class, with Recommendation, Fact, and Rule subclasses. This is a good example of using the inheritance principle of OOP. This should also make manipulating the Tags faster, while incurring a slight memory overhead. To store these Tags in a database, they can be converted to JSON format. On read from the database, they can be easily decoded.

The Tag class has an associated Type, which can take the following enum values: FACT, RECOMMENDATION, and RULE. This is used to distinguish the three types of Tags.

The Fact and Recommendation classes at this point are little more than wrapper classes around a String value. More interesting feaures will be added later on (see ??). The Rule class has the following important fields:

inputFacts Array of input Facts.

output Tags Array of output Tags.

The Tag class itself was made abstract. This means that an object may not be directly instantiated as a Tag, but must be instantiated as one of its subclasses. This makes sense, since a tag must be one of the three types: rule, recommendation or fact. This is an example of using the abstraction principle of OOP.

All of these classes were placed inside the tags package. A UML diagram of the tags package can be seen in ?? of the Appendix.

5.2 Knowledge Node Network

All code relating directly to the KNN was placed in the knn package of the project. A UML diagram of the knn package can be seen in ?? of the Appendix.

The KNN layer is based around the KnowledgeNodeNetwork Java class. This class has the following fields:

mapKN One-to-one HashMap of input Tags to associated KnowledgeNodes.

activeTags HashSet of active Tags, corresponding to input Tags of fired KnowledgeNodes.

The choice of HashSet for the activeTags field is not arbitrary. Indeed, HashSets were used for most of the collections with variable size in the ES and KNN. The original specifications mentioned using ArrayLists, but, since there is no specific iteration order necessary for most operations in the ES and KNN, these collections were changed to HashSets. HashSets are also faster because they have O(1) access time, whereas ArrayLists have O(N), where N is the number of elements in the collection. Access time is important because the tags in the KNN and ES are accessed often. HashSets also have the advantage of only permitting unique elements. This is useful because there should never be two copies of the same tag or the same KN in the system.

The KnowledgeNode class implements the functionality of a KN, which has the following important fields to implement the functionality described in Section 2:

inputTag Input Tag.

outputTags Array of output Tags.

activation int starting at 0, incrementing when the KnowledgeNode is excited.

threshold int threshold that causes firing of the KnowledgeNode.

confidence int representing the belief that the inputTag is true (0 to 100).

age int representing the age of the KnowledgeNode.

The most important method in the KnowledgeNodeNetwork is think(), which chooses either thinkForwards(), thinkBackwards(), or thinkLambda(). These methods implement the functionality described in Section 2 and return the Tags activated as a result of thinking. At this point, think() chooses thinkForwards() by default. In the future, the choice will be determined by META (see ??).

Without a parameter, the think() method runs to natural quiescence. There is also an overloaded version of think() that takes an int numberOfCycles as a parameter. This parameter represents the thinking effort described earlier. Similarly, thinkForwards(), thinkBackwards(), and thinkLambda() all have overloaded versions with numberOfCycles as a parameter. This is a good example of the polymorphism principle of OOP.

Listing 1: Method to think forwards until natural quiescence in the KNN.

Listing 2: Method to think forwards for a fixed number of cycles in the KNN.

Currently, only the thinkForwards() method is fully completed. The version that runs until natural quiescence can be seen in Listing 1. The version with a fixed number of thinking cycles can be seen in Listing 2. One can see that both thinkForwards() methods call forwardThinkCycle(), which can be seen in Listing 3. This is where Tags can become active (line 9), being added into activeTags.

One can see that the forwardThinkCycle() method calls excite() (line 5) KnowledgeNode, which returns the activated as a result of excitation. The method can be seen in Listing 4. This, in turn, may call fire() on line 5 to fire the KnowledgeNode, activate its output tags, and return the Tags activated as a result of firing. The method can be seen in Listing 5. All these methods were made private, since they should never be accessed outside the KNN. This is a good example of the encapsulation principle of OOP.

Listing 3: Method to think forwards for a single cycle in the KNN.

Listing 5: Method to fire a KN.

A simple version of thinkBackwards() was also completed, activating a KN only if all its output Tags are active.

5.3 Expert System

All code relating directly to the ES was placed in the es package of the project. A UML diagram of the es package can be seen in ?? of the Appendix.

The ES layer is based around the ExpertSystem Java class. This class has the following fields:

readyRules HashSet of Rules that have not been activated yet.

activeRules HashSet of active Rules.

facts HashSet of active Facts.

recommendations HashSet of active Recommendations.

The most important method in the ExpertSystem is think(), which implements the functionality described in Section 2. Without a parameter, the think() method runs to natural quiescence. This can be seen in Listing 6.

Listing 6: Method to think until natural quiescence in the ES.

Listing 7: Method to think for a fixed number of cycles in the ES.

There is also an overloaded version of think() that functions similarly to that of the KnowledgeNodeNetwork. This can be seen in Listing 7. Both variants of think() return the Set of Recommendations that become active as a result of thinking, which is passed on to the

META. Both versions also call a method named thinkCycle() which represents a single cycle of thinking. The code for this method can be seen in Listing 8.

Listing 8: Method to think for a single cycle in the ES.

Listing 9: Method to add a Tag to the ES.

```
1 *
2 * @param numberOfCycles the number of rest cycles
3 */
4 void rest(int numberOfCycles);
5
6 /**
7 * Resets the ES by clearing all Rules,
Recommendations, and Facts.
8 */
9 void reset();
10
11 /**
```

Finally, we see in the thinkCycle() method a call to the addTag() method on line 21, which adds a Tag to the ES depending on its type. The code can be seen in Listing 9. The method is public because it could be used by a user of the ES to set the initial data structures. It returns true if the Tag is added successfully. The addRule(), addFact(), and addRecommendation() methods simply add a Tag to the readyRules, facts, or recommendations Sets, respectively, and return true if the ES did not already contain the Tag to be added.

5.4 Testing

All tests on the system were conducted using the TestNG framework in Java, which provides a simple and intuitive way to create assertions in tests. These tests were placed in the test package of the project. A UML diagram of the test package can be seen in ?? of the Appendix. The primary methods of interest in the test package are testKNN(), testES(), and testKNNandES().

The test setup for the testKNN() method can be seen in Figure 7. It creates a KNN, with every node having a threshold value of 1 to simplify the activation process. The system starts out with A as the only active Tag, and testKNN()

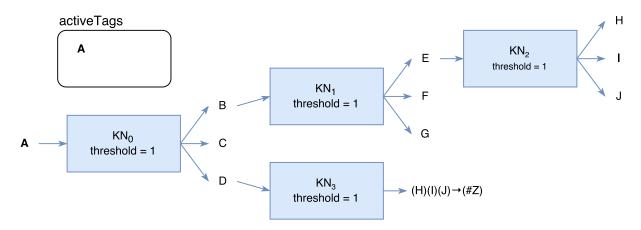


Figure 7: Initial setup for the testKNN() method.

Table 1: Test setup for testES(). Middle activation steps omitted.

State	Ready Rules	Active Rules	Active Facts	Active Recommendations
Initial	$(A)(B) \to (D)$ $(D)(B) \to (E)$ $(D)(E) \to (F)$ $(G)(A) \to (H)$ $(E)(F) \to (\#Z)$		(A),(B)	(#X), (#Y)
:	:	i:	:	:
Final	$(G)(A) \to (H)$	$(A)(B) \to (D)$ $(D)(B) \to (E)$ $(D)(E) \to (F)$ $(E)(F) \to (\#Z)$	(A), (B), $(D), (E)$ (F)	(#X), (#Y), (#Z)

Table 2: Test setup and activation for the ES portion of testKNNandES().

State	Ready Rules	Active Rules	Active	Active
State			Facts	Recommendations
	$(H)(I)(J) \to (\#Z)$		(B),(C),(D)	
Initial			(E), (F), (G)	
			(H),(I),(J)	
			(B),(C),(D)	
Final		$(H)(I)(J) \to (\#Z)$	(E), (F), (G)	(#Z)
			(H), (I), (J)	

will make the KNN think() until natural quiescence. It is therefore expected that all the Tags shown in Figure 7 will become active by the end of the thinking process. The initial and final states are both asserted with TestNG in testKNN(), with positive results.

The test setup for the testES() method can be seen in Table 1. The columns from left to right (ignoring State) correspond to the elements in readyRules, activeRules, facts, and recommendations, respectively. The first row corresponds to the initial setup of the ES, and the last row corresponds to the expected final state. Both the initial and final states are asserted with TestNG in testES(), with positive results.

The testKNNandES() method has the same setup as testKNN() in Figure 7, except the output active Tags from the KNN are passed on to the ES. The resulting setup and activation in the ES can be seen in Table 2. The initial and final states were also tested with TestNG with positive results.

5.5 Documentation

Extensive documentation was created in Javadoc¹. UML diagrams were also created for each package in the source code to accompany the documentation (see Appendix A).

6 Results & Tests

BDD with Mockito + TestNG + Guice

7 Impact on Society and the Environment

7.1 Use of Non-renewable Resources

As purely a software project, there are no physical materials needed to construct this system. For this reason, less emphasis will be put on this section. The only related physical resources potentially needed are the materials needed to

construct the robots and the computers to house the software. One area of concern could be the energy source of the robots themselves, which would probably vary depending on context. Ideally, the source should be a renewable one. For example, solar panels could be placed on the robots to provide energy.

7.2 Environmental Benefits

Prometheus could be used in a context beneficial to the environment. For example, the system could be used as a tool to control robots after oil spills, where the robots could theoretically contain the problem faster than humans and thus limit the risk on the environment. There is already research being done on employing robots in this context. Indeed, MIT's Senseable City Lab has been working on Seaswarm, a system composed of a fleet of vehicles to help clean future oil spills [14]. An AI like Prometheus to control a swarm of robots like this could be very valuable.

7.3 Safety and Risk

It is critical that, once this system is completed, it is used in an ethical way, and for the right purposes. One example of use that may cause ethical concern is in a military setting, where an AI system like the one described here could be used in a battlefield in place of soldiers. Indeed, the US Department of Defense has plans to employ AI for autonomous weapons to attack targets without human intervention in the future [15]. This would have the advantage of potentially saving human soldiers' lives [16]. However, there are also concerns because this would make it much easier to start a battle. More than 3000 AI and robotics researchers have signed an open letter arguing against a military AI arms race [17]. They argue that autonomous weapons would not be beneficial to society, since they would be ideal for assassinations, destabilizing countries or selectively subduing or killing a population.

Another possible issue is the future loss of jobs to be done by humans, with automated sys-

¹The Javadoc can be found here: http://cs.mcgill.ca/~sstapp/prometheus/index.html

tems like Prometheus replacing physical labour. This problem can be solved as a society, perhaps by having more support for universal basic income (UBI). Telsa CEO Elon Musk is a proponent of the idea, saying that UBI will be necessary in the future [18]. Microsoft co-founder Bill Gates suggests possibly having a tax on robots to help pay for this income [19].

In the very long term, there are concerns with the possibility that an AI system might achieve intelligence and awareness close to a human. If such an AI were to obtain "consciousness" in its own way, should that entity be entitled to its own rights, like humans or animals are? The issue has been mentioned by the Institute for the Future, calling for the possibility of "robo-rights" in the future [20].

7.4 Benefits to Society

This type of system could be extremely useful in many contexts in society. For instance, the system could be used to send and control robots in an area that would otherwise be very dangerous for humans. For example, robots are often used in the aftermath of nuclear disasters to prevent the unnecessary loss of human life. Indeed, even in the Chernobyl nuclear disaster, the Soviet authorities employed the use of robots to avoid losses of human life [21]. With an AI like Prometheus, the robots could be controlled in an intelligent manner.

The system could also be used to further space exploration, with an AI controlling multiple robots exploring the surface of Mars, for instance. The value of AI in this context has been clearly shown, with the Mars Curiosity rover recently being upgraded to have its own AI system using computer vision to identify rocks [22]. This system can therefore help further important cutting-edge research in space exploration.


8 Conclusion


This semester, prototypes of the Expert System (ES) and Knowledge Node Network (KNN) layers of the Prometheus AI model were completed in Java based on personal design criteria

and feedback from the supervisor. The design of the prototypes has required a great deal of thought and planning to ensure efficiency and proper behaviour. These prototypes were tested using the TestNG Java framework with positive results, and extensive Javadoc was produced. Possible impacts on the environment and society were also discussed.

The main goal for next semester is to finalize the entire system, implementing more complex features that were omitted for this prototype stage. This will also require proper integration between the work done in this report (KNN and ES), and outside this report (NN and META). Finally, the entire system will have to be tested, in simulation and with physical robots.

A UML Diagrams

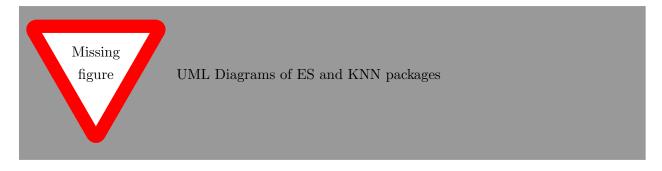

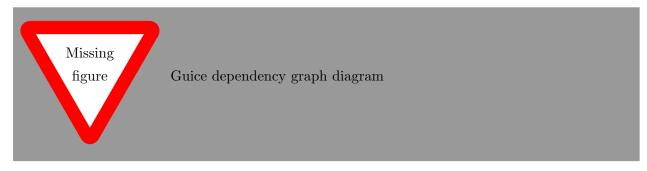

References

- [1] J. Vybihal, "Full AI model," 2016.
- [2] C. Olah, "Conv nets: A modular perspective," http://colah.github.io/posts/2014-07-Conv-Nets-Modular/, July 2014, (Accessed on 04/08/2017).
- [3] J. Vybihal, "Knowledge nodes," 2017.
- [4] J. Palka and C. Stevens, "Neurophysiology a primer," 1967.
- [5] D. O. Hebb, The organization of behavior: A neuropsychological theory. Psychology Press, 2005.
- [6] H. L. Roediger and K. B. McDermott, "Creating false memories: Remembering words not presented in lists," *Journal of experimental psychology: Learning, Memory, and Cognition*, vol. 21, no. 4, p. 803, 1995.
- [7] M. P. Mattson and T. Magnus, "Ageing and neuronal vulnerability," *Nature Reviews Neuroscience*, vol. 7, no. 4, pp. 278–294, 2006.
- [8] D. C. Knill and A. Pouget, "The Bayesian brain: the role of uncertainty in neural coding and computation," *Trends in neurosciences*, vol. 27, no. 12, pp. 712–719, 2004.
- [9] J. Vybihal and T. R. Shultz, "Search in analogical reasoning," 1990.
- [10] D. Kahneman, Thinking, fast and slow. Macmillan, 2011.
- [11] J. Vybihal, "Expert systems," 2016.
- [12] J. L. Popyack, "Object Oriented Programming," https://www.cs.drexel.edu/~introcs/Fa15/notes/06.1_OOP/Advantages.html?CurrentSlide=3, 2015, (Accessed on 04/09/2017).
- [13] "Simbad 3d robot simulator," http://simbad.sourceforge.net/index.php, (Accessed on 03/27/2017).
- [14] "A swarm of robots to clean up oil spills," https://sap.mit.edu/article/standard/swarm-robots-clean-oil-spills, December 2010, (Accessed on 04/09/2017).
- [15] D. Gershgorn, "The US army wants to weaponize artificial intelligence Quartz," https://qz.com/767648/weaponized-artificial-intelligence-us-military/, August 2016, (Accessed on 04/09/2017).
- [16] B. Allenby, "The difficulty of defining military artificial intelligence," http://www.slate.com/articles/technology/future_tense/2016/12/the_difficulty_of_defining_military_artificial_intelligence.html, December 2016, (Accessed on 04/09/2017).
- [17] "Open letter on autonomous weapons future of life institute," https://futureoflife.org/open-letter-autonomous-weapons/, (Accessed on 04/09/2017).
- [18] A. Kharpal, "Tech CEOs back basic income as AI job losses threaten industry backlash," http://www.cnbc.com/2017/02/21/technology-ceos-back-basic-income-as-ai-job-losses-threaten-industry-backlash.html, February 2017, (Accessed on 04/08/2017).

- [19] "Bill Gates: Job-stealing robots should pay income taxes," http://www.cnbc.com/2017/02/17/bill-gates-job-stealing-robots-should-pay-income-taxes.html, February 2017, (Accessed on 04/08/2017).
- [20] "Robots could demand legal rights," http://news.bbc.co.uk/2/hi/technology/6200005.stm, December 2006, (Accessed on 04/09/2017).
- [21] G. Dvorsky, "A museum of robotic equipment used during the Chernobyl disaster," http://io9.gizmodo.com/a-museum-of-robotic-equipment-used-during-the-chernobyl-512831778, 2013, (Accessed on 04/08/2017).
- [22] "How does mars rover Curiosity's new AI system work? astronomy.com," http://www.astronomy.com/news/2016/08/how-does-mars-rover-curiositys-new-ai-system-work, August 2016, (Accessed on 04/07/2017).