



Token distributions and temperature

$$\text{softmax}(x_i) = \frac{e^{x_i/\tau}}{\sum_{j=1}^n e^{x_j/\tau}}$$

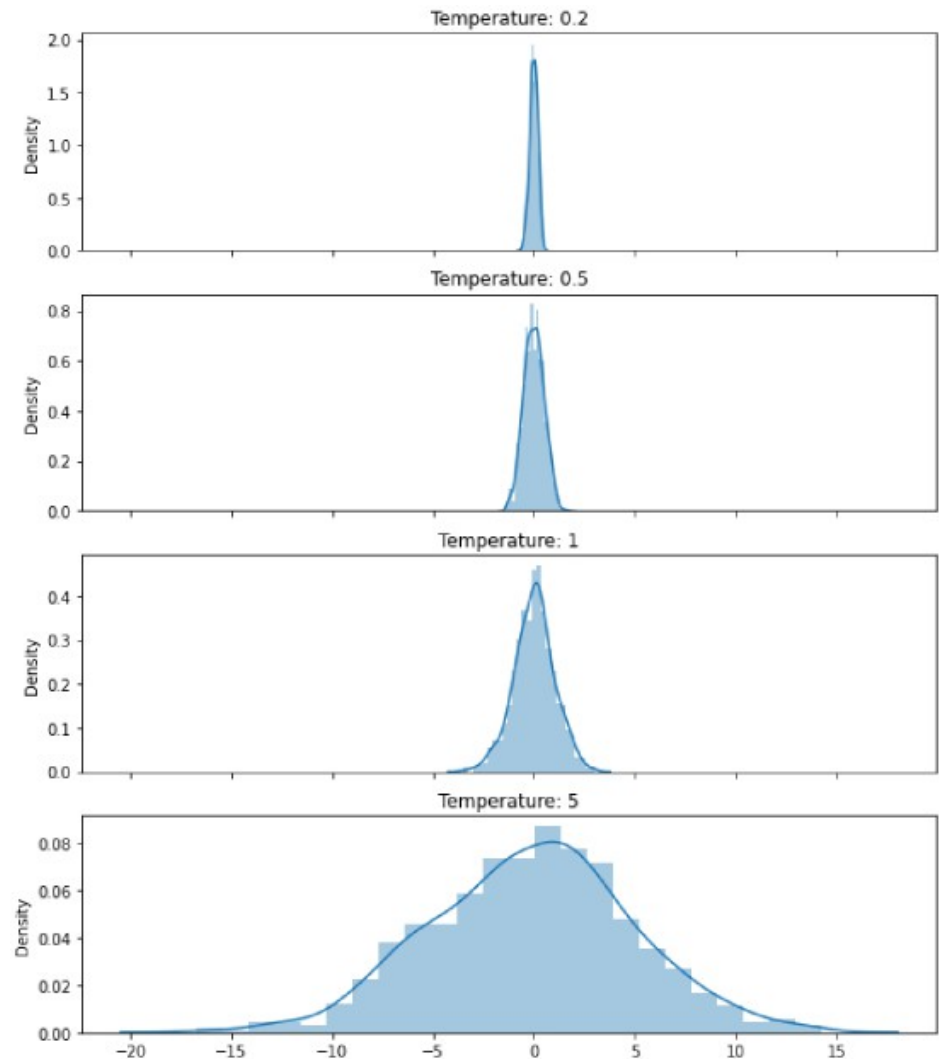


Top-p

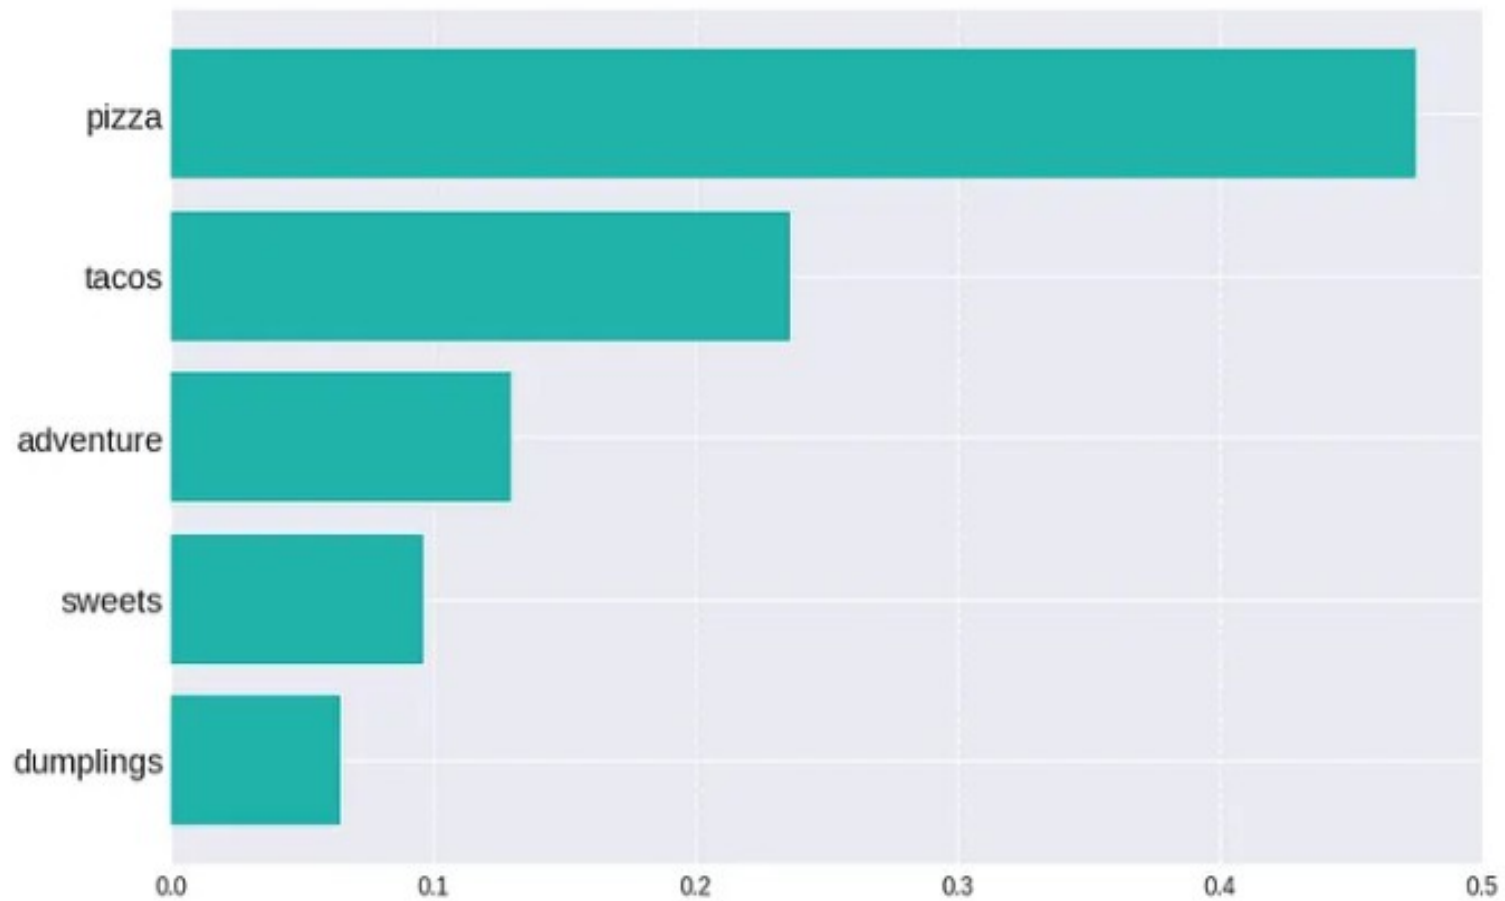


Example tokens and probabilities for "I am hungry for"

Top-p

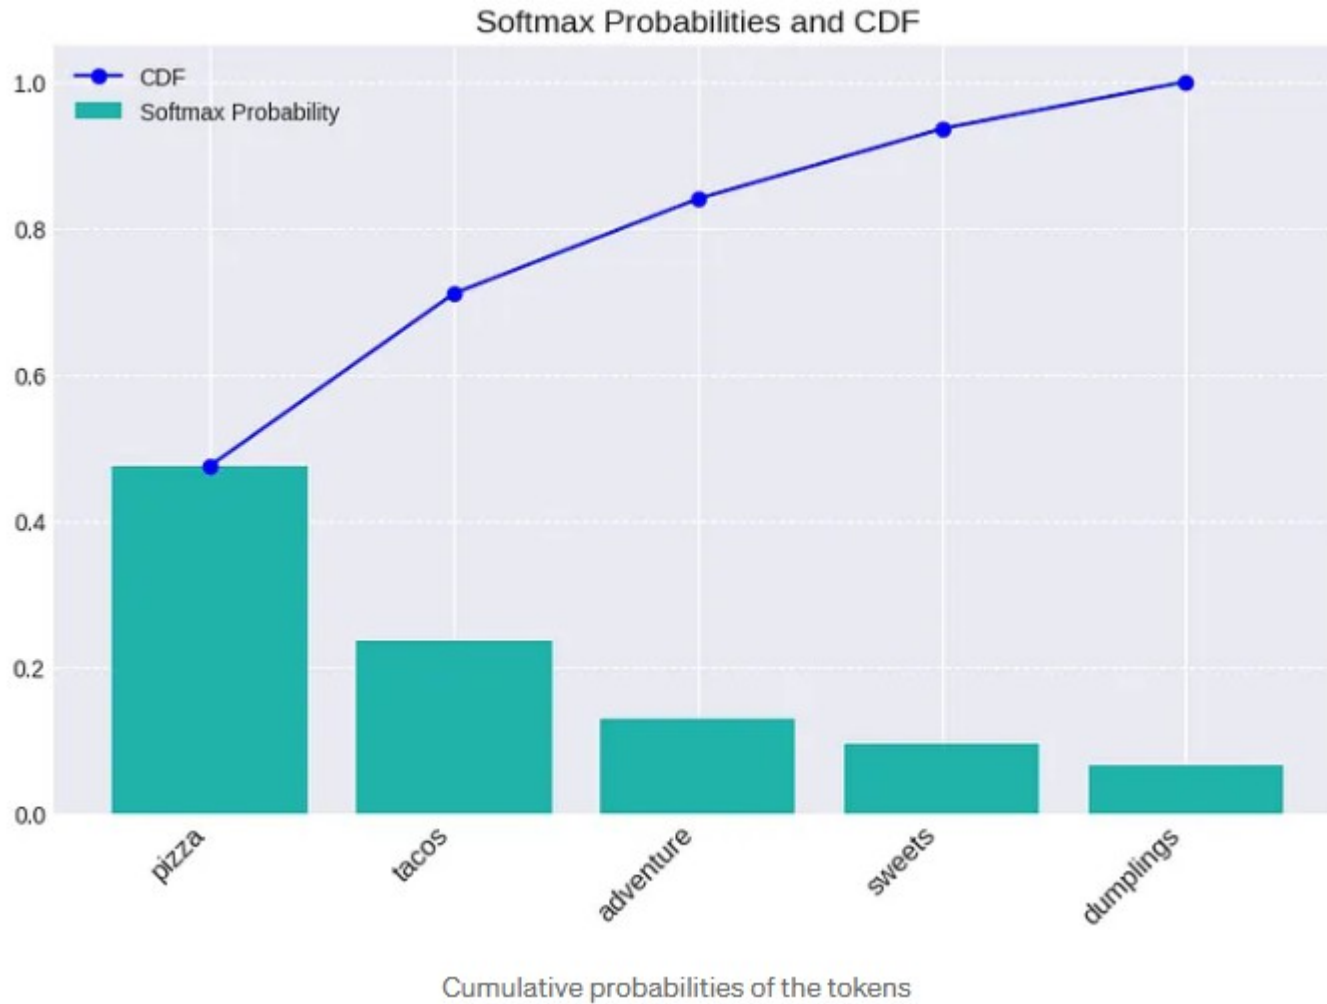


Top-p = 0.9

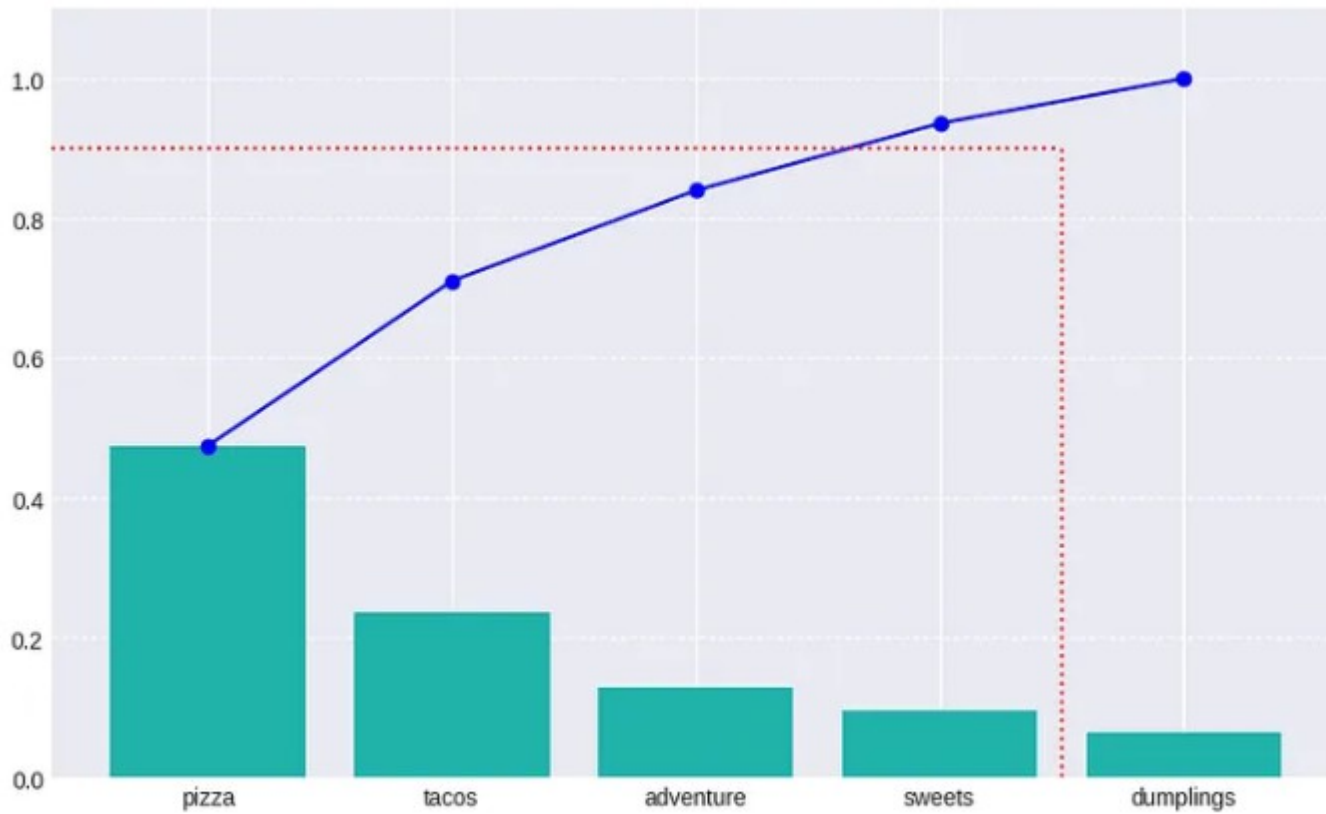

Selecting tokens when top-p is set to 0.9

Top-k

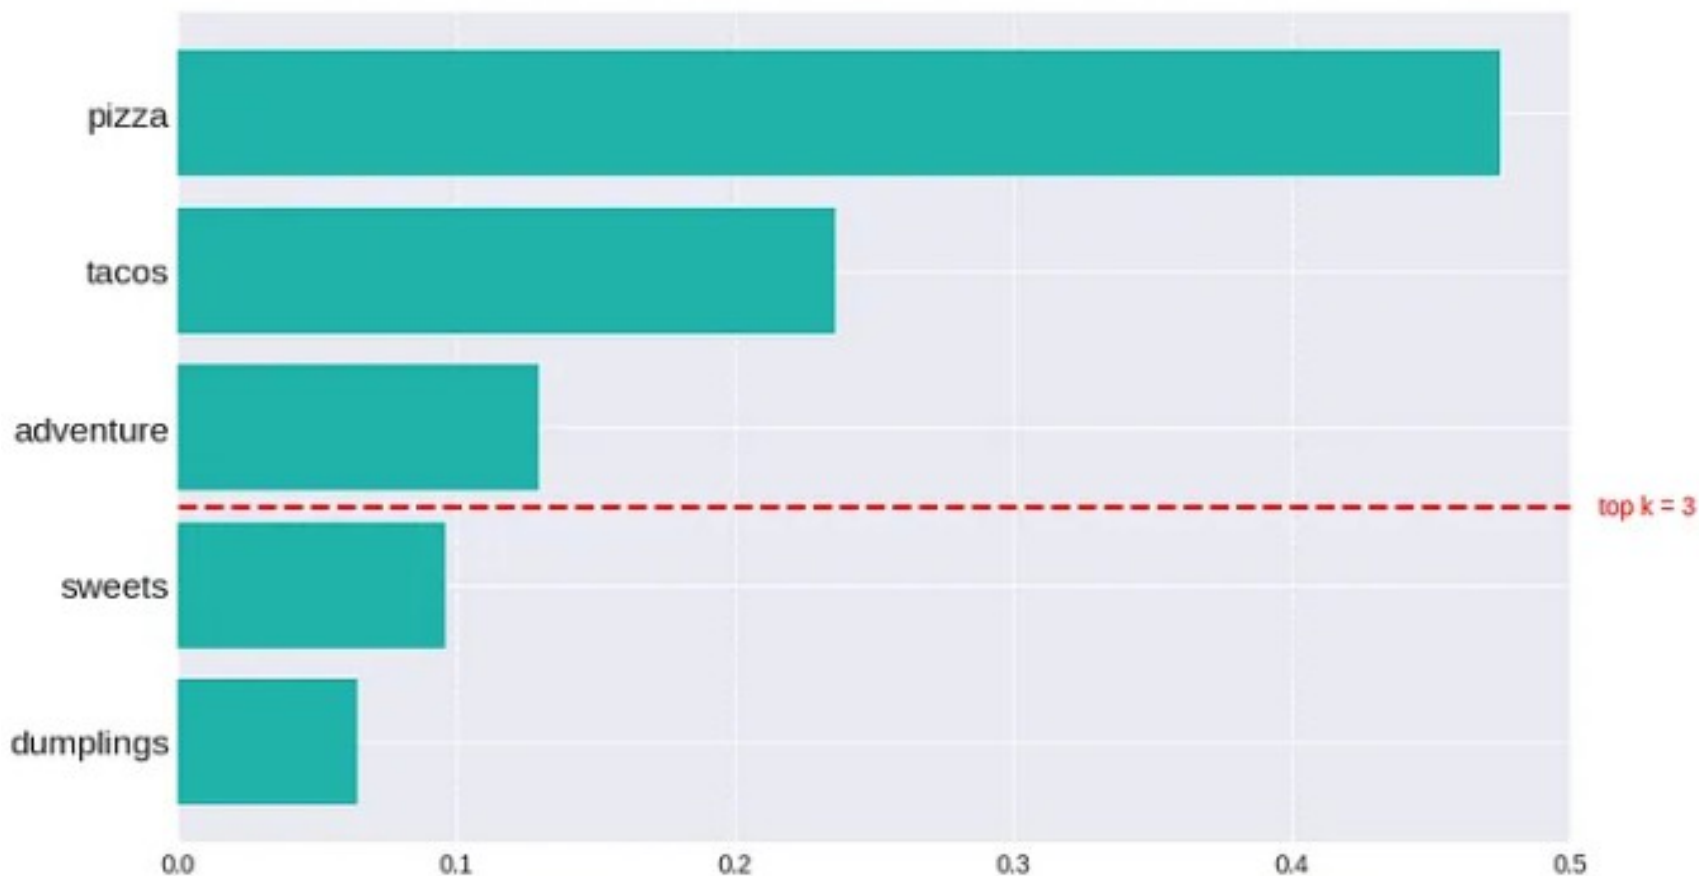

Token threshold when top-k is set to 3

$$\text{softmax}_{\text{top-k}}(z_i) = \begin{cases} \frac{e^{z_i}}{\sum_{z_j \in Z_{\text{top-k}}} e^{z_j}} & \text{if } z_i \in Z_{\text{top-k}} \\ 0 & \text{otherwise} \end{cases}$$

