


6 MODUŁOW



6 MODUŁOW



Stawianie środowiska

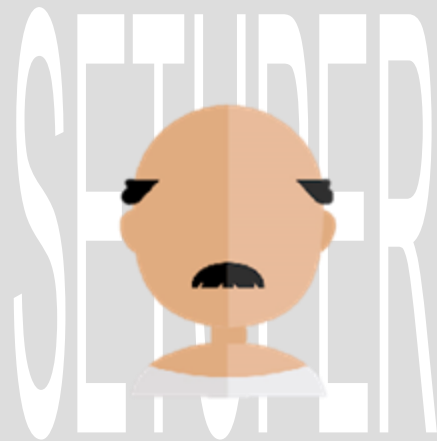


Tworzenie repozytorium z linii poleceń

git init – inicjalizuje lokalne repozytorium

git status – sprawdza status plików na w repozytorium obecnym na komputerze

Sposób drugi – tworzenie repozytorium przez interface

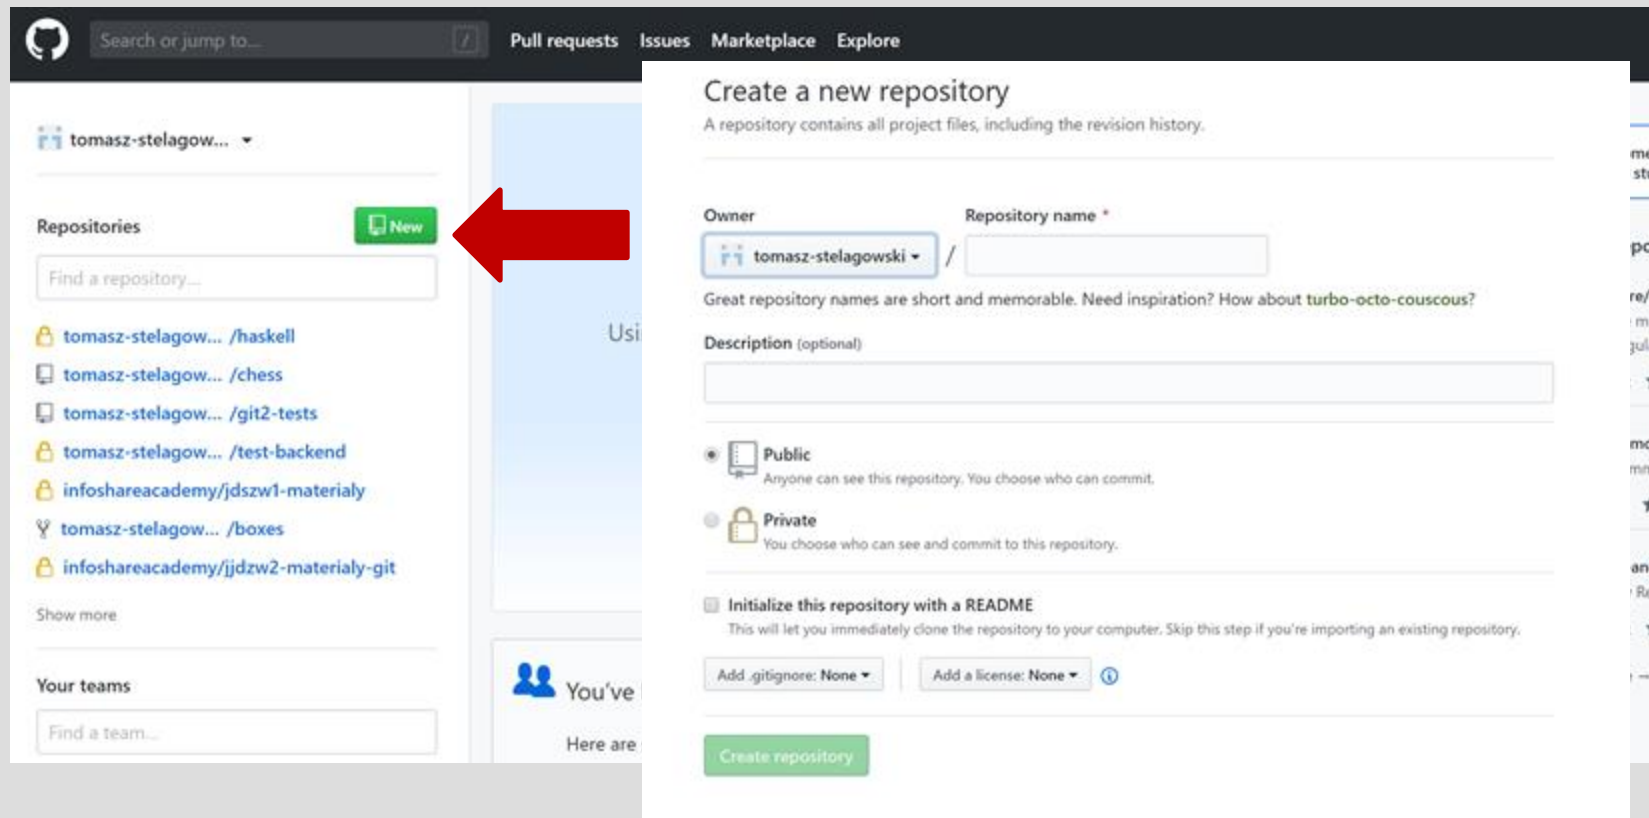

The screenshot displays the GitHub web interface. On the left sidebar, under the 'Repositories' section, there is a green 'New' button. A large red arrow points from this button towards the 'Create a new repository' modal window that is open in the center. The modal window has a title 'Create a new repository' and a subtitle 'A repository contains all project files, including the revision history.' It contains several input fields: 'Owner' (set to 'tomasz-stelagowski'), 'Repository name' (empty), 'Description (optional)' (empty), and 'Public/Private' (set to 'Public'). There are also checkboxes for 'Initialize this repository with a README' and 'Add .gitignore' and 'Add a license' (both set to 'None'). A green 'Create repository' button is at the bottom of the modal.

Search or jump to... Pull requests Issues Marketplace Explore

tomasz-stelagow... ▾

Repositories **New**

Find a repository...

- tomasz-stelagow... /haskell
- tomasz-stelagow... /chess
- tomasz-stelagow... /git2-tests
- tomasz-stelagow... /test-backend
- infoshareacademy/jdszw1-materialy
- tomasz-stelagow... /boxes
- infoshareacademy/jdszw2-materialy-git

Show more

Your teams

Find a team...

Use

Create a new repository

A repository contains all project files, including the revision history.

Owner Repository name *

tomasz-stelagowski /

Great repository names are short and memorable. Need inspiration? How about turbo-octo-couscous?

Description (optional)

☒ **Public**
Anyone can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.


☒ **Initialize this repository with a README**
This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: None ▾ Add a license: None ▾ ⓘ

Create repository

Klonowanie repozytorium


`git clone`
`<git_repo_url>` -
kopiuje repozytorium z
danego linku na
komputer lokalny

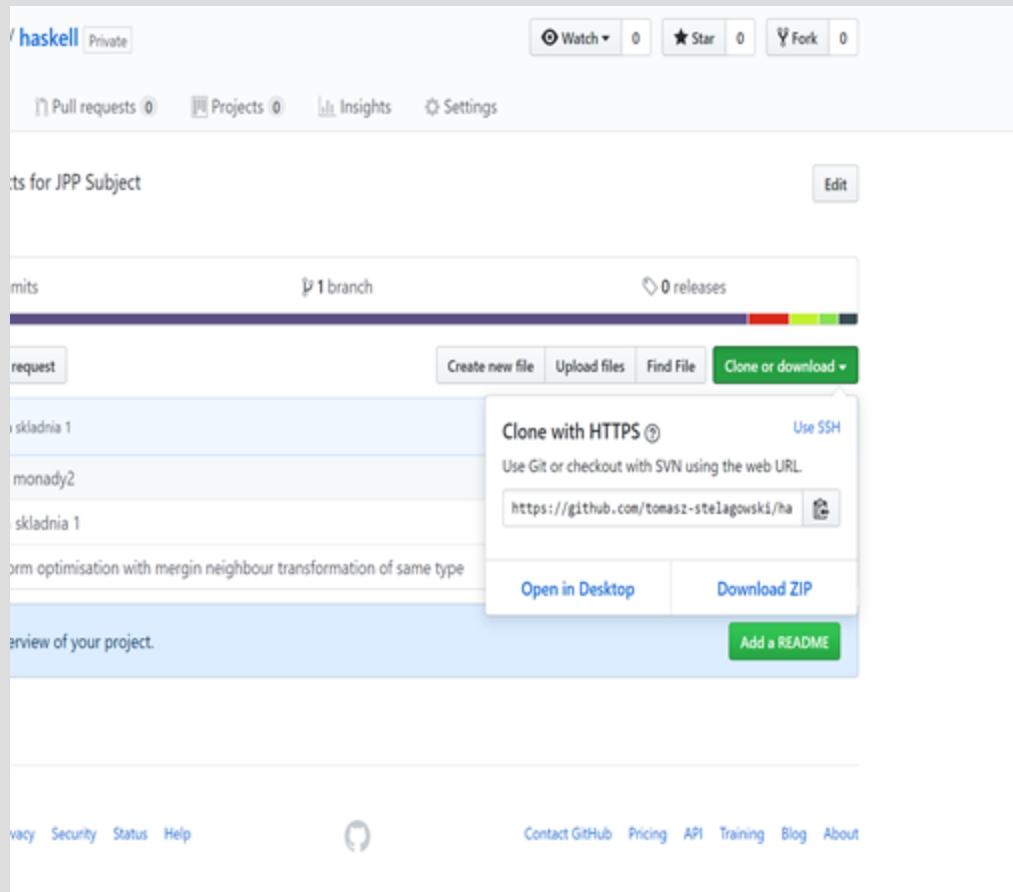

README

 renovate.json	ci: update packageFiles to be renovated (#29071)	a month ago
 shims_for_IE.js	Revert "refactor: add license header to JS files & format files (#12035..."	3 years ago
 test-events.js	fix(platform-browser): run BLACK_LISTED_EVENTS outside of ngZone (#18993	2 years ago
 test-main.js	build: add render3 entry-point to legacy test systemjs config (#29675)	2 days ago
 tslint.json	build: remove unused rollup.config.js files (#28646)	2 months ago
 yarn.lock	build(bazel): update to nodejs rules 0.27.10 (#29694)	2 days ago
 yarn.lock.readme.md	build: remove travisci leftovers (#27979)	3 months ago

README.md

Angular

Angular is a development platform for building mobile and desktop web applications using Typescript/JavaScript and other languages.

Quickstart

[Get started in 5 minutes.](#)

Changelog

[Learn about the latest improvements.](#)

Want to help?

Want to file a bug, contribute some code, or improve documentation? Excellent! Read up on our guidelines for [contributing](#) and then check out one of our issues in the [hotlist: community-help](#).

How GIT works

GIT remotes




GitHub

ATLASSIAN




Bitbucket

6 MODUŁOW

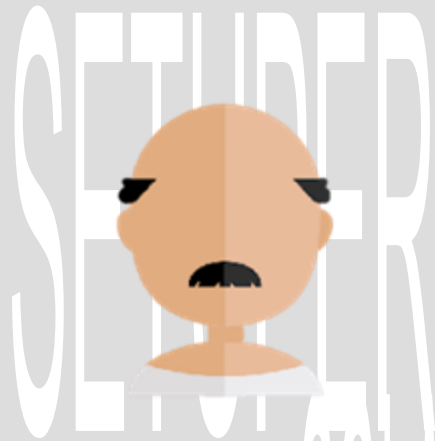

6 MODUŁOW

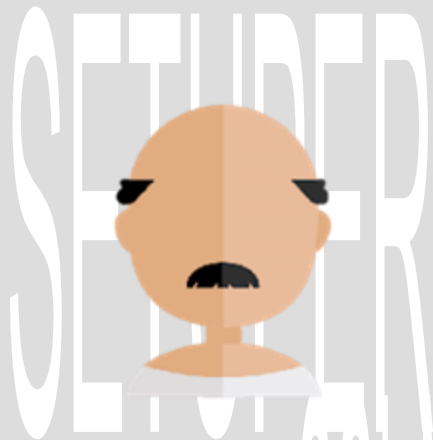

Wprowadzanie pierwszych zmian



Untracked / Modified



Untracked / Modified



Staged



Untracked / Modified

ORIGIN



Staged



Untracked / Modified



Staged



Committed



ORIGIN



Untracked / Modified



Staged



Committed



Pushed



ORIGIN



Untracked / Modified


Committed

ORIGIN

Push


Pull

Staged

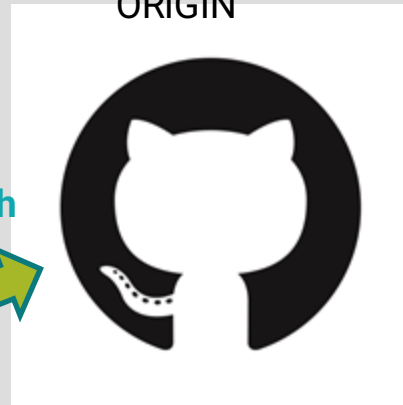

How GIT works

3 GIT areas

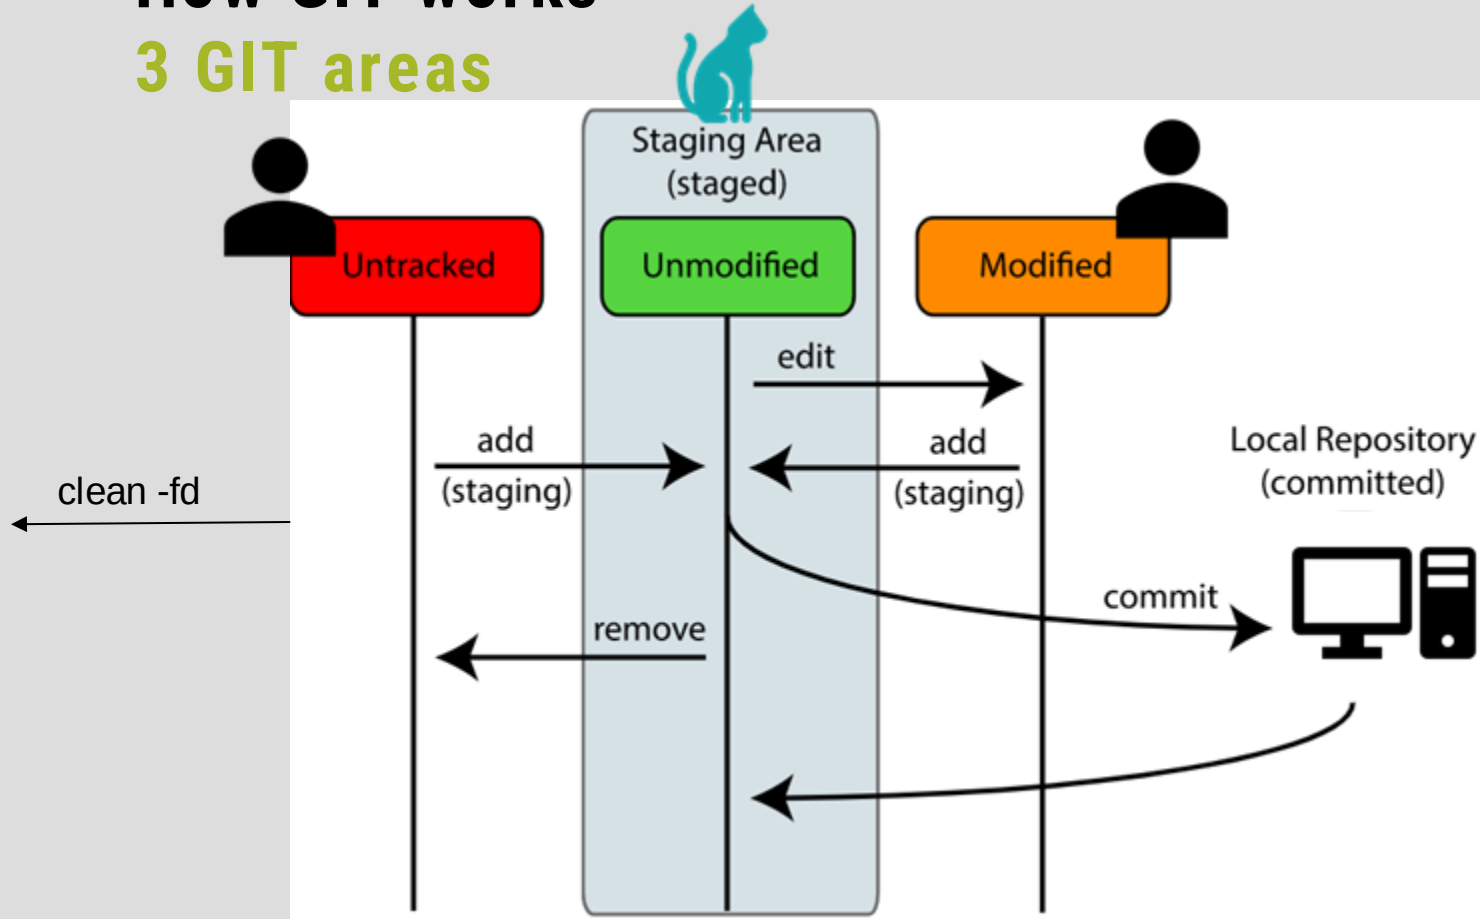

How GIT works?

Basic operations

git add - dodaje zmiany do fazy *staging*

git commit - tworzy nowy punkt historii z podanym opisem, ze wszystkimi zmianami podanymi w stg.

git push - uploaduje historię zmian z naszego komputera do repozytorium na serwerze

To co po kolei?

```
Git add .
```

```
Git status
```

```
Git commit -m „opis komita”
```

```
Git status
```

```
Git push
```


```
Git status
```

History of Version Control Systems


.gitignore

.gitignore plik który mówi GITowi których plików, zmiany nie należy śledzić ani komitować

6 MODUŁOW

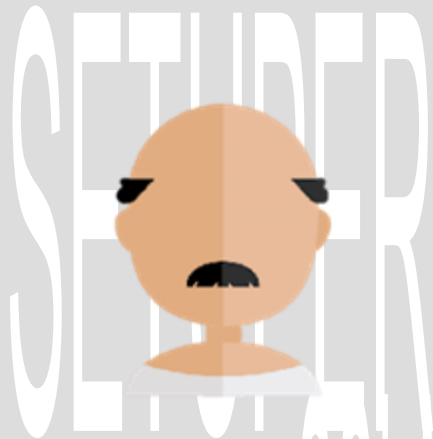

6 MODUŁOW

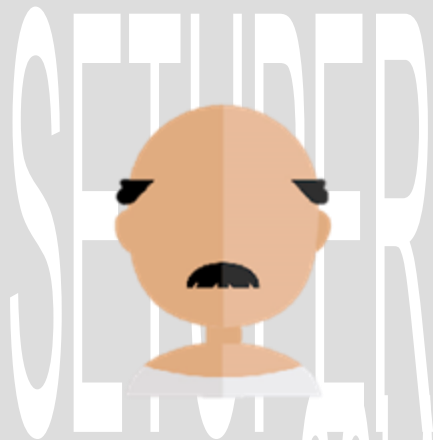

Tworzenie nowych gałęzi



How GIT works?

Basic operations

- git branch** - pokazuje listę wszystkich branchy lokalnych
- git branch -a** - pokazuje listę wszystkich branchy lokalnych i tych na serwerze
- git branch [nazwa]** - tworzy branch o zadanej nazwie który ma tą samą historię co obecny
- git checkout [nazwa]** - zmienia obecnie wgrany branch na inny
- git checkout -b [nazwa]** - tworzy nowy branch o zadanej nazwie i przełącza się na niego

No to lecimy

```
Git branch <nazwa>
```

```
Git checkout <nazwa>
```

```
# robimy zmiany w jakiś plikach
```

```
Git add .
```

```
Git commit -m „wiadomość tu”
```

```
Git push
```

```
#I co?
```

No to lecimy

```
Git branch <nazwa>
```

```
Git checkout <nazwa>
```

```
# robimy zmiany w jakiś plikach
```

```
Git add .
```

```
Git commit -m „wiadomość tu”
```


```
Git push
```

```
#I co?
```

```
#Nie działa bo musimy przekazać na który branch ma być push
```

```
git push -u <upstream_branch>
```


No to lecimy

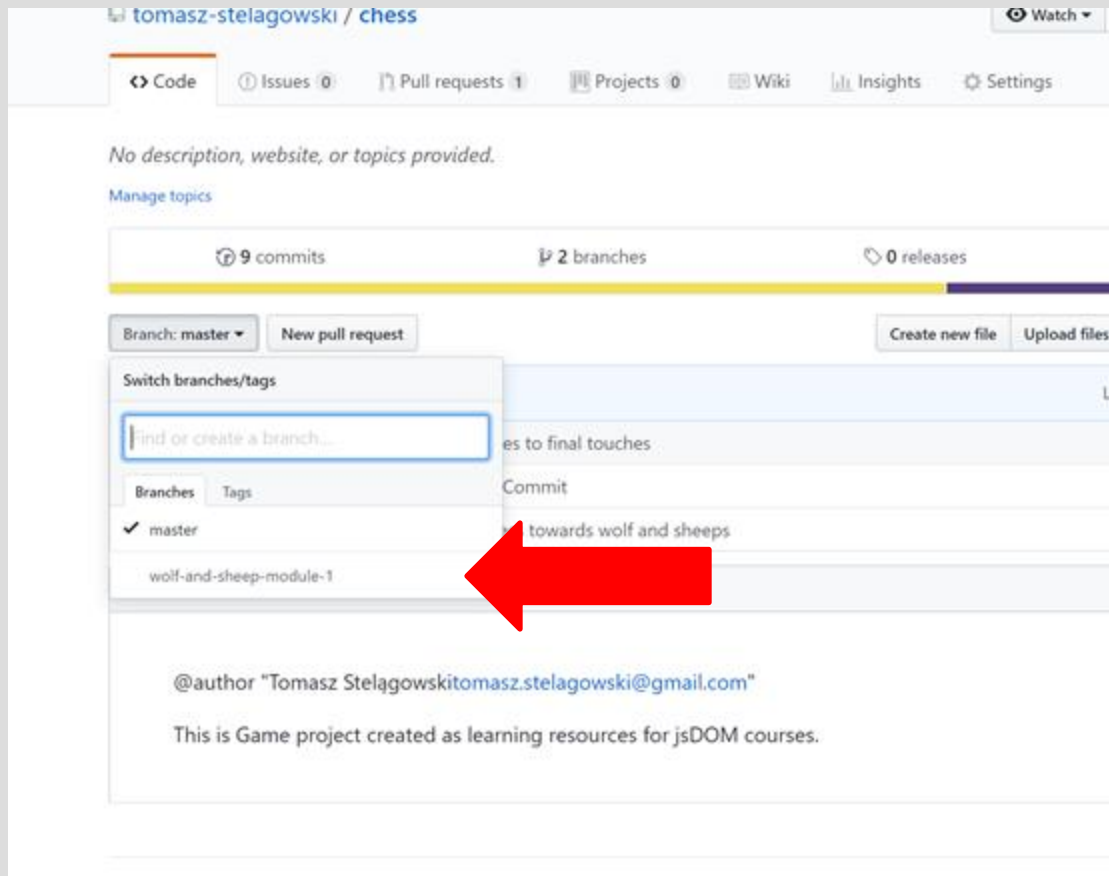

6 MODUŁOW



6 MODUŁOW

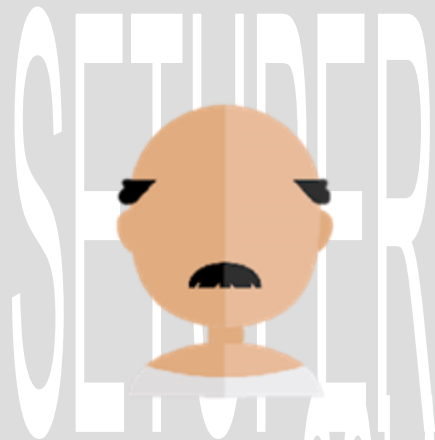

Praca w zespole



O czym będziemy mówić?

- Jak ściągać zmiany innych osób
- Jak wystawiać pull-request
- Jak Mergować pull-request
- Jak rozwiązywać konflikty

Jak ściągać zmiany innych

git fetch - ściąga najnowsze informacje o repozytorium, czy są nowe branche, czy są nowe zmiany w plikach itd.

git fetch -a - to samo co wyżej, ale we wszystkich branchach naraz

git pull - to samo co wyżej, ale we wszystkich branchach naraz

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git fetch -a
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git status
On branch master
Your branch is behind 'origin/master' by 2 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
nothing to commit, working directory clean
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git log -2
commit 6eff3f6262c8c75b3c791d2088091b04c3f49f50
Author: tomasz-stelagowski <tomasz.stelagowski@gmail.com>
Date: Sat Oct 6 06:41:51 2018 +0200
```

Module3 finished

```
commit 9fa71bf3930046fe36e00624489bdd77b0464b6e
Author: tomasz-stelagowski <tomasz.stelagowski@gmail.com>
Date: Sat Oct 6 06:10:55 2018 +0200
```

module3 init

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git pull
```

Updating 6eff3f6..95d5c79

Fast-forward

src/assets/sheep.png	Bin 0 -> 342223 bytes
src/assets/wolf.png	Bin 0 -> 33442 bytes
src/js/module3_finaltouches.js	96 ++++++
src/style.css	20 ++++++

4 files changed, 64 insertions(+), 52 deletions(-)

create mode 100644 src/assets/sheep.png

create mode 100644 src/assets/wolf.png

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git status
```

On branch master

Your branch is up-to-date with 'origin/master'.

nothing to commit, working directory clean

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$
```

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$ git log -4
```

```
commit 95d5c7959732253535a3be71145c38df5a7cd0c9
```

```
Author: Tomasz Stelagowski <tomasz.stelagowski@gmail.com>
```

```
Date: Sat Oct 6 06:50:06 2018 +0200
```

changes to final touches

```
commit e5f2d1cefa493ead000d8b34b1f58e7ef0a70e9c
```

```
Author: tomasz-stelagowski <tomasz.stelagowski@gmail.com>
```

```
Date: Sat Oct 6 06:48:50 2018 +0200
```

style changes

```
commit 6eff3f6262c8c75b3c791d2088091b04c3f49f50
```

```
Author: tomasz-stelagowski <tomasz.stelagowski@gmail.com>
```

```
Date: Sat Oct 6 06:41:51 2018 +0200
```

Module3 finished

```
commit 9fa71bf3930046fe36e00624489bdd77b0464b6e
```

```
Author: tomasz-stelagowski <tomasz.stelagowski@gmail.com>
```

```
Date: Sat Oct 6 06:10:55 2018 +0200
```

module3 init

```
tstelagowski@DESKTOP-71AJRT7:/mnt/c/Users/tomas/Documents/Git Projects/chess$
```

Jak Tworzyć pull requesty

 tomasz-stelagowski / chess

Watch 0 Star 0 Fork 7

[Code](#) [Issues 0](#) [Pull requests 1](#) [Projects 0](#) [Wiki](#) [Insights](#) [Settings](#)

No description, website, or topics provided. [Edit](#)

[Manage topics](#)

9 commits 2 branches 0 releases 1 contributor

Branch: master [New pull request](#) [Create new file](#) [Upload files](#) [Find File](#) [Clone or download](#)

 tomasz-stelagowski changes to final touches Latest commit 95d5c79 on 6 Oct 2018

 src	changes to final touches	7 months ago
 .gitignore	Initial Commit	7 months ago
 README.md	progress towards wolf and sheep	7 months ago

 README.md 

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).



base: master



compare: wolf-and-sheep-module-1

✗ Can't automatically merge. Don't worry, you can still create the pull request.



Wolf and sheep module 1 #1

Hey TOMek please check and merge

[View pull request](#)

Wolf and sheep module 1

Write

Preview

AA B i “ <> 🔗 ☰ ☷ ☹ @ 📌 ↶

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

[Create pull request](#)

Reviewers



No reviews—at least 1 approving review is required.

Assignees



No one—assign yourself

Labels



None yet

Projects



None yet

Milestone



No milestone

Wolf and sheep module 1 #2

Edit

Open tomasz-stelagow... wants to merge 7 commits into `master` from `wolf-and-sheep-module-1`

Conversation 0

Commits 7

Checks 0

Files changed 9

+57 -5



tomasz-stelagow... commented just now

Owner

+12 ...

No description provided.

tomasz-stelagowski added some commits on 6 Oct 2018



style changes

fd31b7d



module 1 graphics

e4f2ac3



moveCount to module 1

0f32648



progress towards wolf and sheeps

6466b5d



module3 init

3421322



initial module 1

36712c6



cleaning

b2fae07

Reviewers



No reviews—at least 1 approving review is required.

Assignees



No one—assign yourself

Labels



None yet

Projects



None yet

Milestone



No milestone

Notifications

Unsubscribe



You're receiving notifications because you authored the thread.

1 participant

Add more commits by pushing to the `wolf-and-sheep-module-1` branch on `tomasz-stelagowski/chess`.

Review required


At least 1 approving review is required by reviewers with write access. [Learn more.](#)

This branch has conflicts that must be resolved

Use the [web editor](#) or the [command line](#) to resolve conflicts.

Resolve conflicts

Fast-Farward

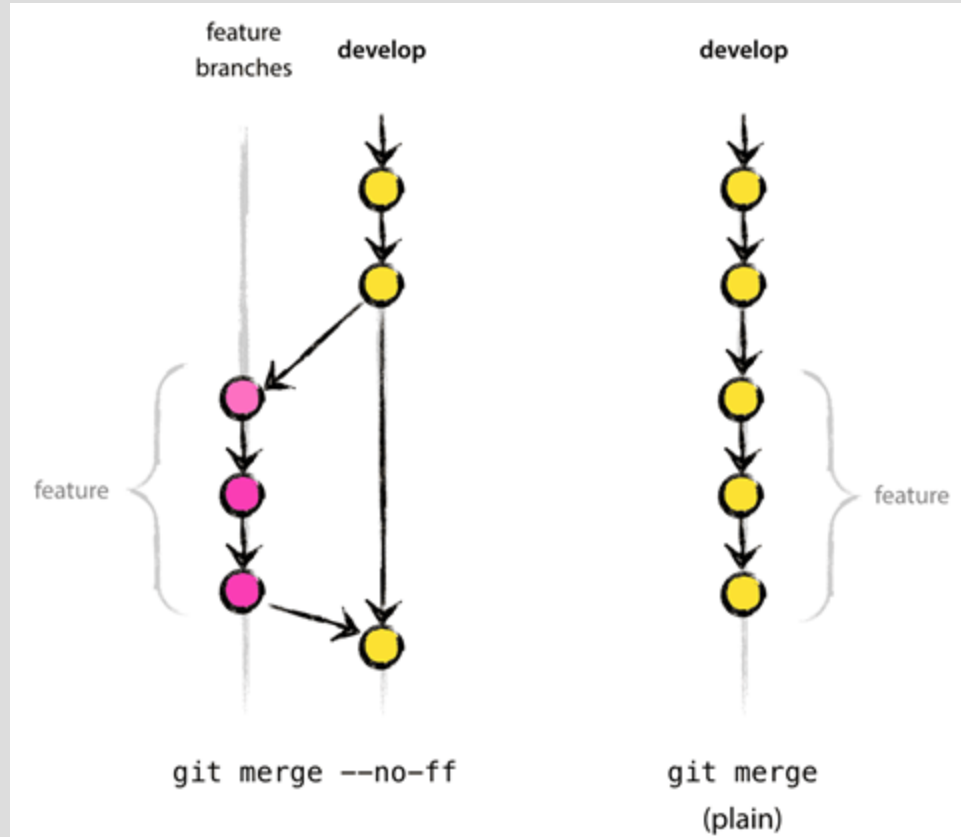

Dwie przydatne komendy

MERGE

- To samo co przy *pull-request*
- Tworzy nowy commit
- „do” obecnej gałęzi
- Nie zmienia historii

REBASE


- Nie Tworzy nowego commitu
 - Zmienia historię
- Obecna gałąź „na” inną
 - Tylko w prywatnych

Łączenie zmian w różnych gałęziach


git rebase <branch> - Kopiuje historie badanego brancha, a następnie przenosi dodatkowe komity z obecnego brancha

git merge <branch> - Przenosi dodatkowe komity/zmiany z danego brancha tworząc nowy komit w obecnym branchu

Rebase w GIT

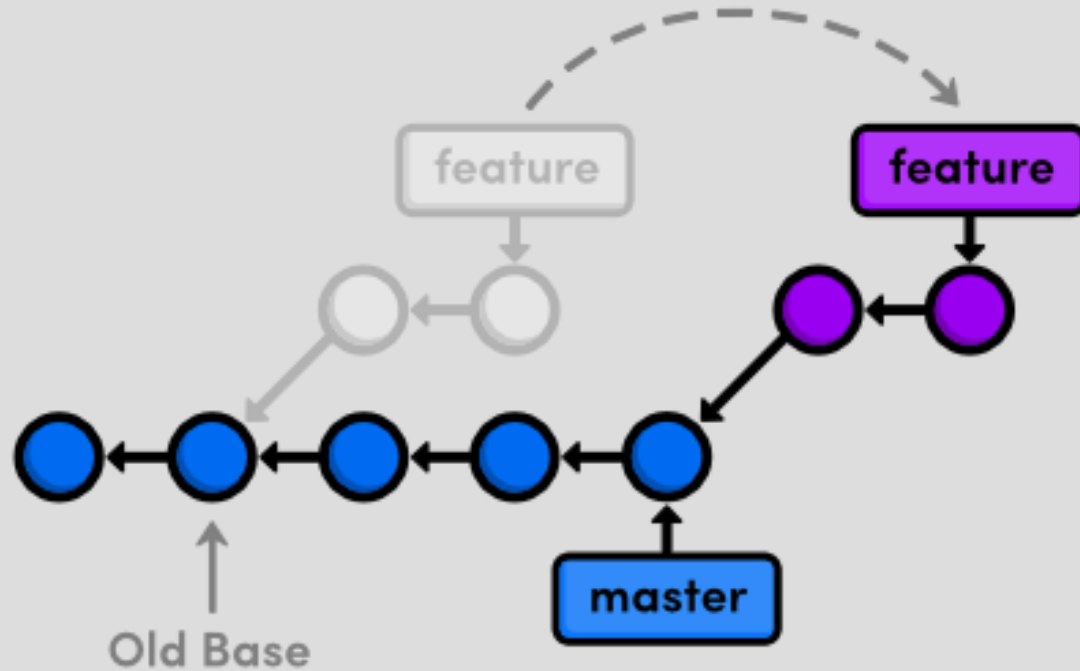

Merge w GIT

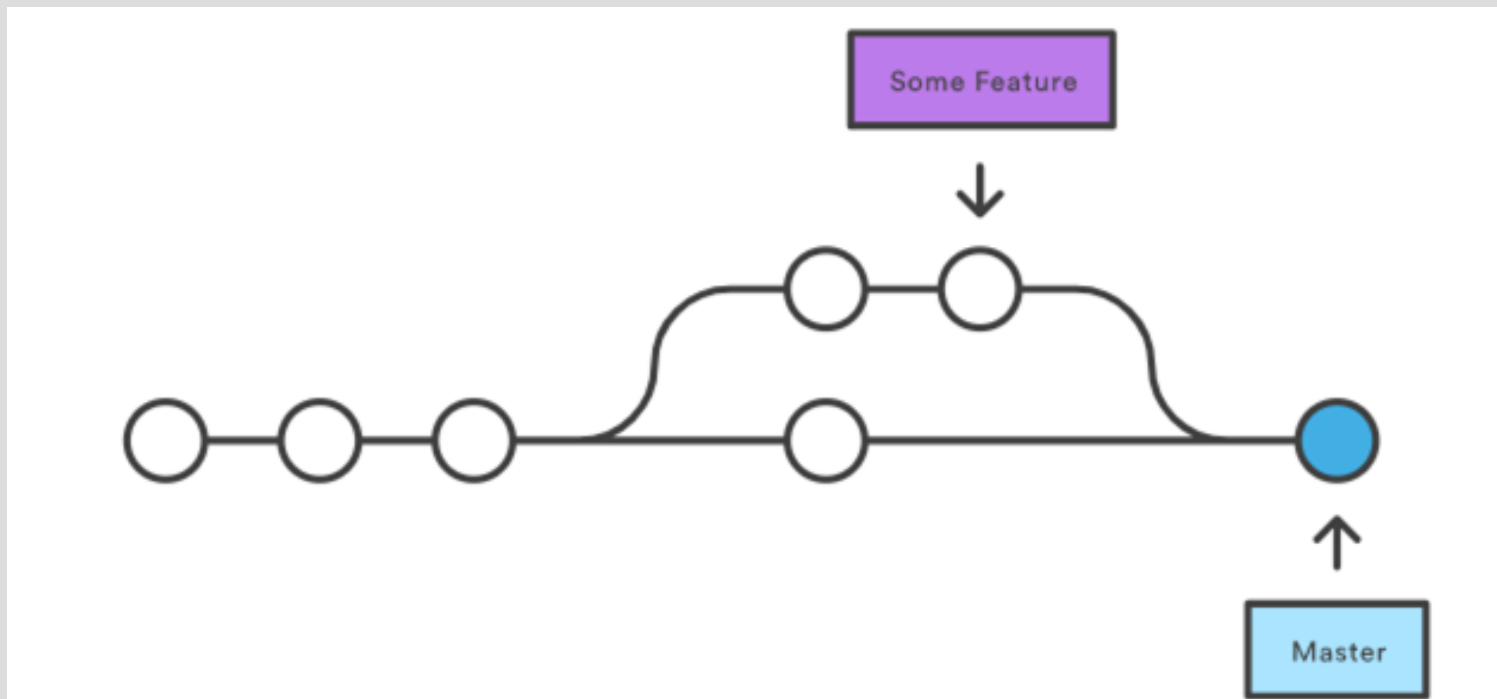



Thanks!!

Any questions?