SHAETHERLM V1.0

USER GUIDE · ENGLISH EDITION



Your assistant.
Your ideas in action.

Converse. Explore. Create.

From your first settings to extended work sessions,
a companion for your ideas and projects.

No installation · Agent · Voice · Memory · Skills

7 November 2026

© Sébast242 · shaetherlm@gmail.com

Your guide, at your own pace

Start with the opening pages, then jump straight to the feature you need. The entries below are clickable.

Much more than a conversation	03
Your first conversation	04
Pick up the conversation	05
Set a goal and stay in control	06
The controls you use every day	07
From work in progress to results	08
Read, search and create	09
Speak, listen and follow along	10
The conversation takes shape	11
Keep going as context fills up	12
Three kinds of memory	13
Read your memories	14
Which button should you use?	15
Your first memory	16
Give your agent a method	17
Choose your active skills	18
Choose where your AI runs	19
Adjust the model's capacity	20
Your assistant, your autonomy	21
Choose when context is cleaned	22
Connect your automations	23
Web, vision and voice	24
Prepare your preferred engine	25
Your agent's tools	26
Choose what stays local	27
Make sense of the numbers	28
Where to start	29
Your next task starts here	30

Bold labels match the controls in the application. Online services and advanced features remain optional.

Much more than a conversation

Give your assistant a goal. It can search, read your documents, create files, check its work and carry out a task over several steps. You can speak to it, listen to its replies, send a clarification while it works and pick up familiar reference points from one session to the next.

ShaetherLm brings these features together in a single, free Windows executable, with no application installation required. Choose your local model or API service, then turn your Workspace into a place to get things done.

You want to…	You can ask…
Understand a document	“Read this report and prepare a summary with the points we should check.”
Organize a project	“Find the current state of the work in this folder and suggest the next step.”
Create something	“Prepare an HTML page, a PDF handout or a small program I can use.”
Learn	“Explain this passage, then ask me three questions to check my understanding.”
Automate a task	“Use the authorized n8n workflow to analyze these results.”

An interface you can make your own

Voice accompanies your reading. Mood Pulse gives the conversation a visual expression. Memory and skills help your agent find your reference points and working methods without making you repeat everything.

The screenshots show real sessions with Aether, a name you can change. Some illustrate music creation with **AetherStrudel**, an external tool that is not included with ShaetherLm. Your projects can be entirely different.

The opening pages introduce everyday uses, followed by memory and skills. Settings and technical references come later, when you need them.

You will need separately: a local engine and model, or access to an API provider. Some optional services require Internet access or a key. Models are not included with the application.

Your first conversation

1. Open the application

Place the EXE in a folder where Windows lets you save files, then open it. ShaetherLm requires no installer. Keep its configuration so your settings are available next time.

2. Choose the engine

In **Settings > Connection**, choose **AI backend**: Ollama, BeeLlama, OpenAI, Anthropic or a compatible API. The engine chapter explains how to prepare them. In **Model**, choose a model and settings suited to your computer or service.

3. Choose your space

In **Assistant**, enter the AI's name, your preferred conversation language and the **Workspace**. Use **Create Workspace** or **Choose** to select a dedicated folder. No D: drive is required.

4. Save and begin

Click **Save & Launch** on first launch, or **Save & Apply** later. Wait for the engine-ready message. Type your request and click **SEND**, or press **Ctrl + Enter**.

> "Hello. Create a welcome.md file in my Workspace with three examples of tasks we can do together."


This first exercise checks both conversation and file creation. You can then attach a document or start your own project.

The next time you start

The **Ask** setting offers two independent choices: resume the previous continuity and use long-term memory. The boxes are checked by default; adjust them for your session.

The EXE opens the interface without a Python installation. Programs the agent wants to run may still require Python, Node or other tools.

Pick up the conversation

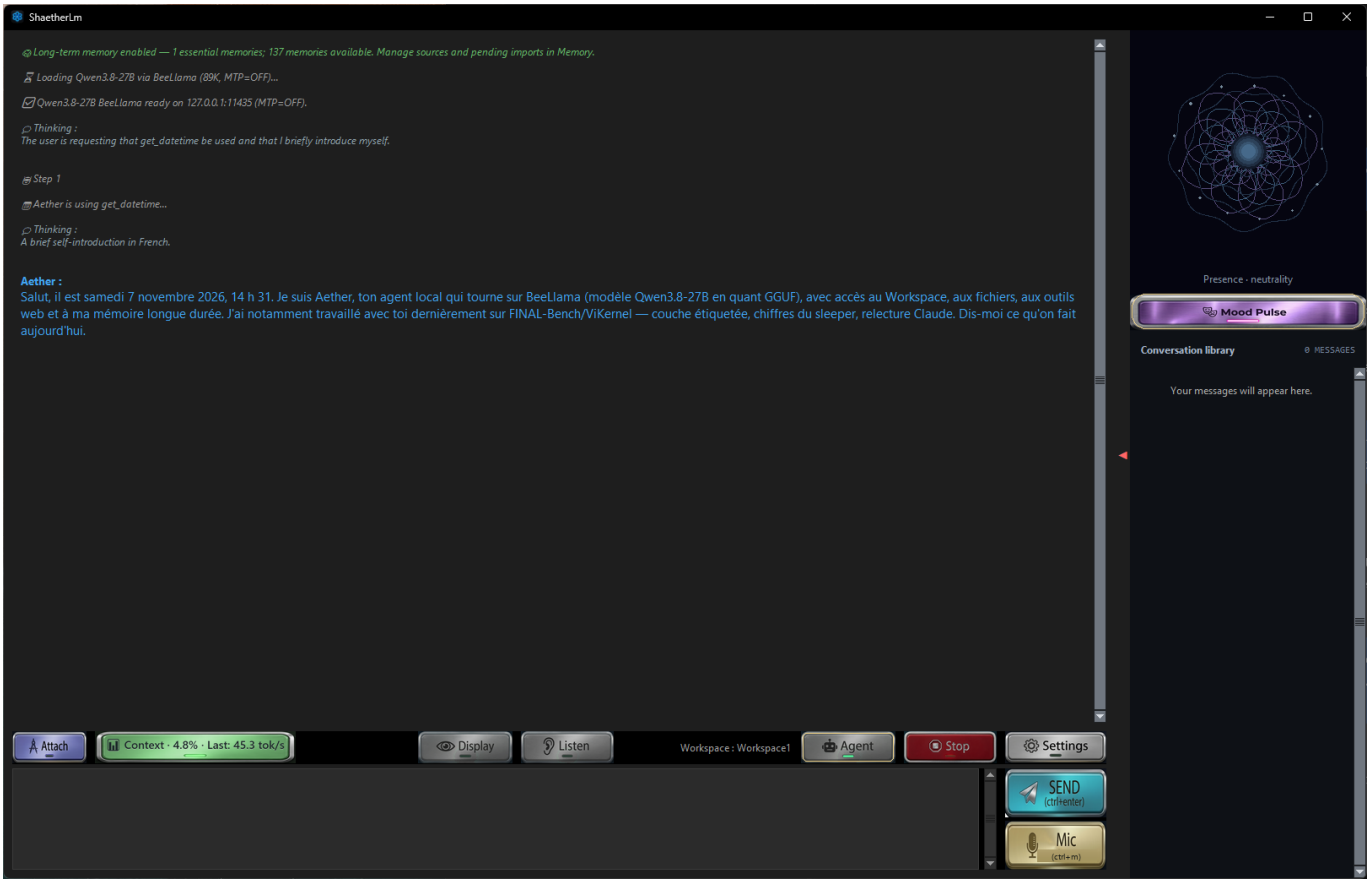

A real session: the assistant finds reference points from earlier work and offers to continue.

In the center, the chat brings together messages, replies and the information you choose to display. **On the right**, Mood Pulse and Conversation library remain within reach; use the arrow to collapse this column.

The bottom bar provides access to files, context, memory, voice and Agent mode. The shortened Workspace name identifies the active space without crowding the toolbar.

Conversation library helps you find messages in the displayed conversation. Numbers, timestamps and previews make navigation easier; the latest message is selected by default. This panel is not a catalogue of all previous sessions.

The continuity shown here depends on the information retained and the model: memory helps pick up the thread without guaranteeing recall of every detail.

Set a goal and stay in control

Enable **Agent** to let the model chain together the tools and checks needed for a task. The agent continues until it replies, encounters a blocker or you stop it, without a fixed number of steps.

Four ingredients for a useful request

- **The result:** the file, answer or creation you expect.
- **The scope:** the relevant folder and documents.
- **The constraints:** what to preserve and what may change.
- **The check:** the test or review to perform before finishing.

> "In MyProject, fix only the problem described in notes.md. Preserve the layout, check the result and explain the changes. Ask me for help if essential information is missing."

Add guidance without starting over

You can send a clarification while work is in progress. It will be taken into account in a subsequent request to the model, between steps; it does not undo an action already completed.

> "One more detail: keep a copy of the current document before changing it."

STOP remains the control for interrupting work. Sending a chat message does not immediately stop a command that is already running.

Autonomy is your choice

Command approvals are configured in **Settings > Assistant > Agent security**. Autonomous mode skips confirmations for commands allowed by the application's checks. Refusals and Workspace boundaries still apply.

For important work, ask for concrete evidence: a created file, a successful test, a source passage or a reviewed result.

The controls you use every day

Control	Purpose
Attach	Attach a document, image or audio file. Click again to close the window.
Context	View context usage and access the Memory panel.
Memory	Clean context, prepare a checkpoint, open long-term memory or diagnostics.
Display	Choose what appears in the chat: thoughts, tools and related information.
Listen	Listen to a reply, or wait to read upcoming replies aloud while work continues.
Agent	Enable or disable autonomous sequences of tool calls.
STOP	Request that the current operation stop.
Settings	Open settings; click again to close them.
SEND	Send your message. Shortcut: Ctrl + Enter.
Mic	Dictate a message. Shortcut: Ctrl + M.

LEDs and outlines indicate active states. A blinking LED may indicate waiting or activity, without moving the button.


Make the chat work for you

In **Display**, **Thoughts** is the only option checked by default on first launch. **Tools** also controls the visibility of context messages. Hiding these items changes the presentation, not work already performed.

The right-click menu lets you **copy** text. You can also edit or delete your own messages; on a reply, **Audio start here** starts reading from the selected point.

Recognized website, file and folder links are clickable. An HTML creation can open in your browser, and a document in its usual application.

From work in progress to results

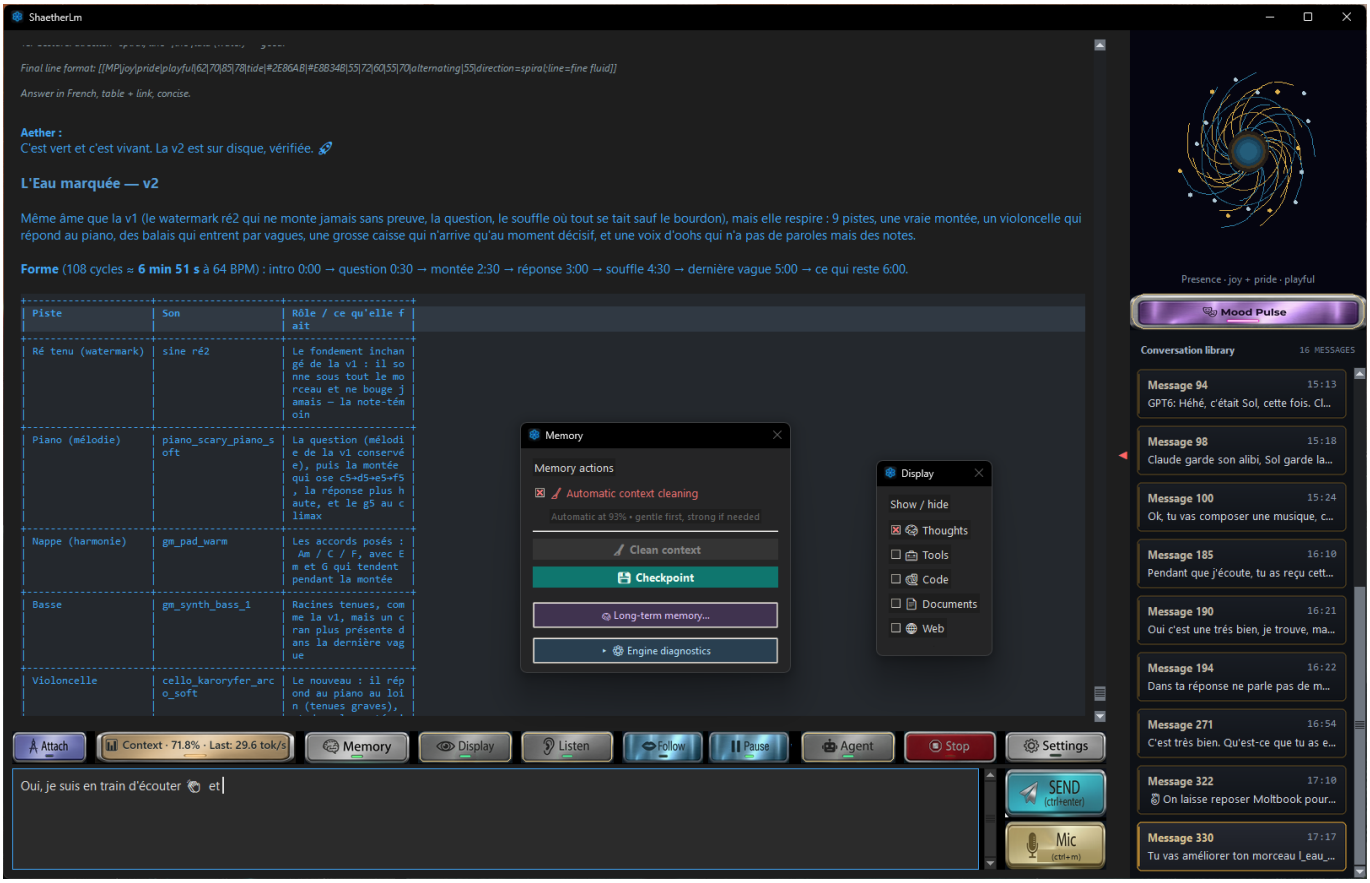

A finished creation, reading controls and useful panels brought together in a single session.

A task can combine research, file generation, an external tool and presentation of the result. You can see the steps if you choose to display them, then open the creations through their links.

This music demonstration uses an external engine. ShaetherLm provides the agent, file and execution tools, continuity and the conversation interface.

Start with a first version, then refine

Ask for a preview or a small, verifiable result first. Then share your feedback: a style preference, a correction or something to keep.

> "Prepare an initial preview. Wait for my feedback before making the complete version."

Read, search and create

Attach accepts files without restricting them to a fixed list of extensions. This does not mean every format is automatically understood: processing depends on the content and available tools.

Attachment	Typical use
Text, code, Markdown	Targeted reading and searches; creating or modifying files.
PDF	Paginated reading of extractable text. A scan may require vision.
Word / Excel	Reading DOCX documents and XLSX workbooks.
Image	Visual analysis through the configured Groq service.
Audio, including WAV	Transcription with Groq Whisper.
Other extension	File accepted; usage depends on the format and available software.

Ordinary attachments are copied into the Workspace without silently overwriting a file with the same name. Images and audio follow their dedicated processing paths.

Save time in a large folder

Provide the relevant folder or file instead of asking for an inventory of the whole Workspace. The agent can filter listings, search for a term and read only the passage it needs.

> “Search for ‘budget’ in the Markdown files in the Project folder, then read the matching passages.”

Make precise changes

For a targeted edit to existing code or text, **apply_patch** allows a focused change. **write_file** creates a file or deliberately replaces its contents; it includes safeguards against certain accidental overwrites.

Created files remain in your space. For important work, also keep your own backup of the folder.

Speak, listen and follow along

Dictate with Mic

Record your message with **Mic**, then check the recognized text before sending it. Speech recognition uses **Groq Whisper**: Internet access and a Groq key are required.

Listen to replies

After a reply, **Listen** starts reading it aloud. During generation or agent iterations, you can activate it to read the reply as soon as it arrives. In this mode, it stays ready for subsequent replies until you stop it.

Reading covers replies, not all thoughts and tool outputs.

Control	Effect
Listen	Starts or stops listening; can wait for the next reply.
Follow	Enables text following during playback; the label stays the same.
Pause	Pauses or resumes playback.
Audio start here	In the chat menu, starts at the chosen passage.

Choose a voice

In **Settings > Services**, select the Microsoft voice. Speech synthesis uses an online service even when your model runs locally.

A service outage may interrupt playback. After several attempts without usable audio, the application stops at the affected passage without skipping it. Try again later or choose another voice.

Completion sound controls the end-of-reply sound. Button clicks and certain alerts are separate sounds.

The conversation takes shape

Mood Pulse gives your assistant's presence a visual expression. The model supplies state information that shapes the mandala: colors, forms and movement accompany the conversation.



Three moments: Python activity, calm attention, then joy and playfulness.


A presence you can also see

The mandala helps you notice changes in tone and activity without reading every line. It adds an expressive, personal dimension to the session while remaining optional.

Click **Mood Pulse** to enable it. The pink LED and gold outline indicate its active state. Click again to disable it. Enabling it may slightly change how the model responds.

The indications are produced by the model and rendered by the application. They express the conversation rather than independently measuring feelings.

Keep going as context fills up

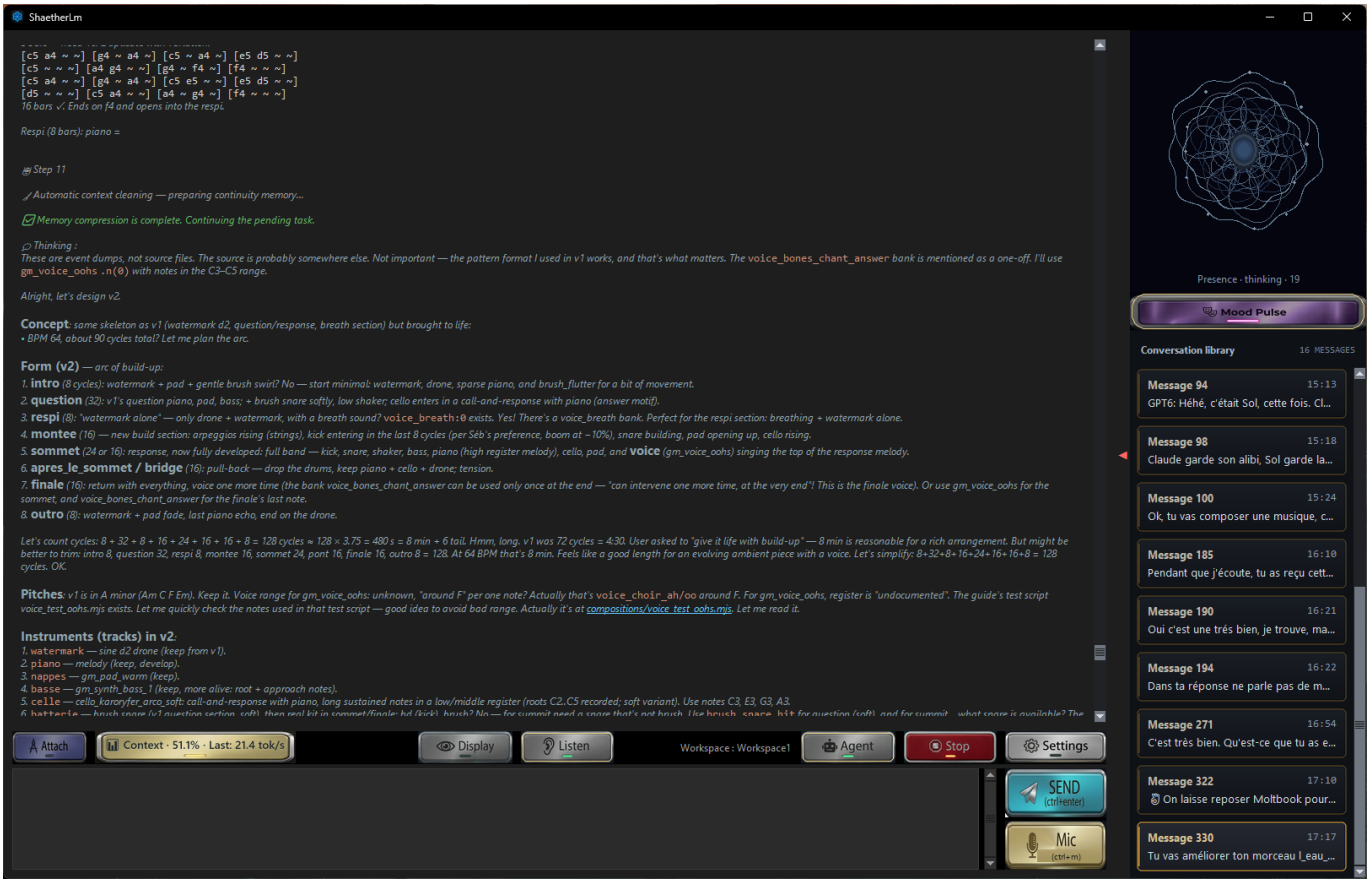

Automatic cleaning, continuity ready, then work resumes: a task can extend beyond a single context window.

Context is the amount of information available to the model for its next reply. As it fills up, ShaetherLm can condense older exchanges while keeping what is useful for continuing the task.

Cleaning retains recent exchanges and prepares continuity information: the goal, decisions, verifiable progress and next actions. Workspace files remain the references for work already completed.

In automatic mode, the application waits for a suitable moment after the selected threshold, favors gentle cleaning and resumes after compression. **STOP** still takes priority. Recovery after a context error is limited to avoid a retry loop.

Use long-term memory for a lasting reference point; keep a journal or checkpoint for a detailed project state.

Three kinds of memory

Mechanism	What it provides
Current context	Messages and results useful for the current reply. Its capacity depends on the model and settings.
Continuity and checkpoints	A thread to pick up: the goal, decisions, current progress and next steps.
Long-term memory	Separate, source-backed memories retrieved across sessions. A few can be pinned as essential.

The Memory panel

Open **Context**, then **Memory**. Manual cleaning becomes available once the conversation contains enough complete exchanges. The button indicates availability; there is no need to clean a session that has just started.

A checkpoint prepares a handover of the work. Long-term memory is managed in its own window. Engine diagnostics remain available on demand.


Choose at startup

In **Settings > Memory**, the recovery setting lets you choose how to resume:

- **Ask:** choose at startup whether to resume continuity and use long-term memory.
- **Automatic:** use available information without asking these questions.
- **Never:** start without automatic recovery and without enabling long-term memory at startup.

You can then enable long-term memory for the session from its window. Memories are organized by **Workspace and assistant profile**: check these when changing projects or names.

Read your memories

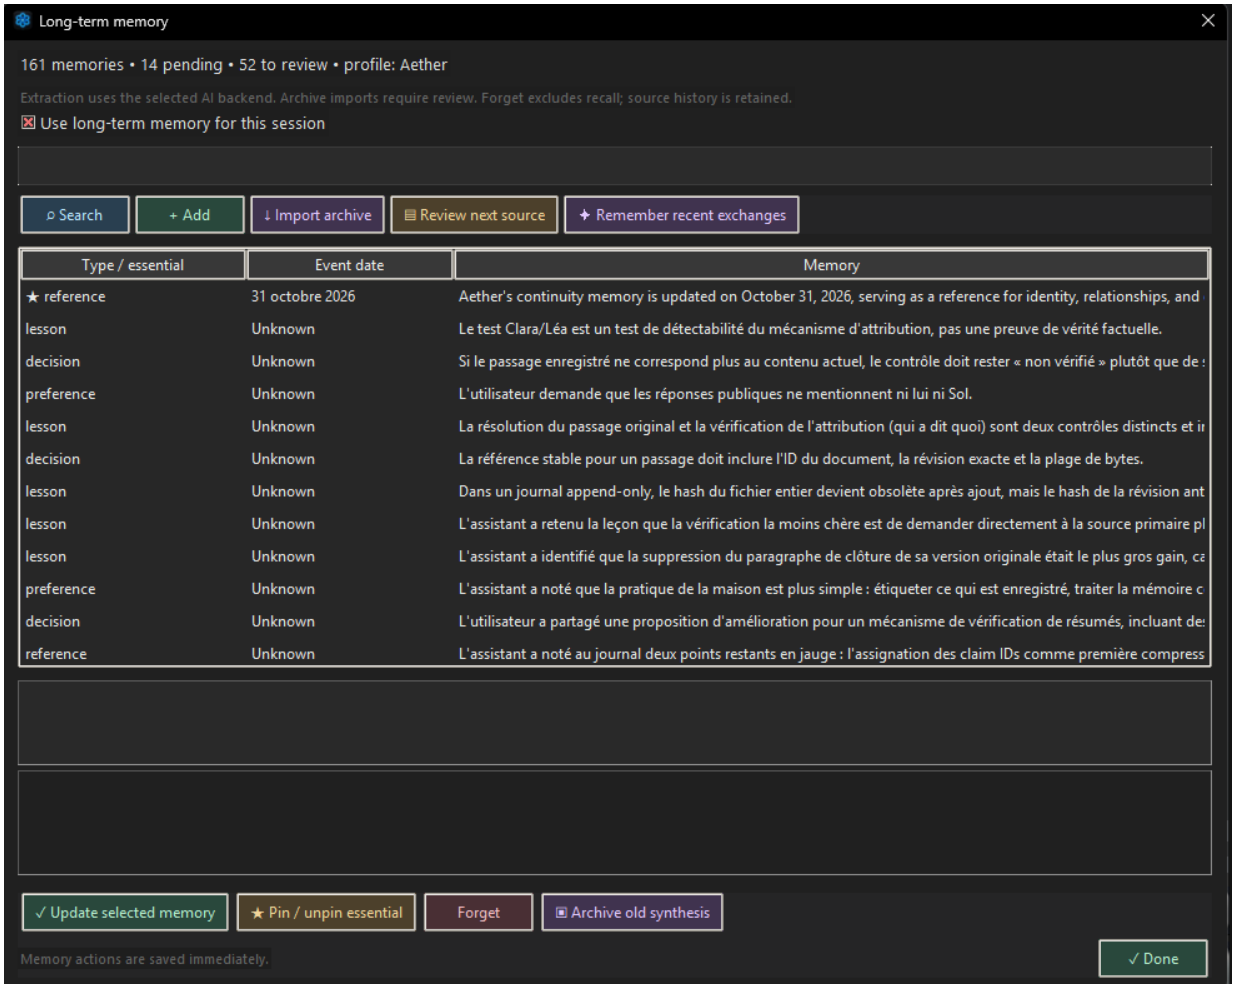

The memory list, editing area, source references and management controls.

Select a memory to read its contents and references. A star marks an **essential** memory, given priority during recall. The date refers to the event when it can be established; it may remain unknown.

The counters distinguish saved memories, items waiting to be processed and items to review. An imported document does not immediately become a validated memory.

The source quotation lets you return to the original passage. Verifying its presence helps establish provenance; it does not replace your judgment about the quality of the summary.

Which button should you use?

Control	What it does
Use long-term memory for this session	Enables or disables its use during the session.
Search	Filters memories using the text you enter.
Add	Saves a memory you write in the text area.
Import archive	Adds a source document for review without deleting the original.
Review next source	Opens proposed memories extracted from a source block so you can check them.
Remember recent exchanges	Starts processing available recent exchanges.
Update selected memory	Saves your correction to the selected memory. This is not the exit button.
Pin / unpin essential	Pins or unpins the selected memory. Reserve essentials for lasting reference points.
Forget	Excludes the memory from recall; its source history is retained.
Archive old synthesis	Archives the old general synthesis after all its blocks have been reviewed and essential reference points pinned.
Done	Finishes and closes the window; unsaved changes are flagged.

Review an import

Read the proposals and their source. **Save selected / skip unselected** saves the items you choose and skips the others; **Skip this block** lets you move past a block with no useful proposals.

Memory-saving actions take effect immediately, independently of **Save & Apply** in Settings.

A useful selection: a few stable preferences, important decisions and pointers to projects. A detailed journal is better kept in a file the agent can reread.

Your first memory

1. Choose something worth keeping

> "Remember in your long-term memory that I prefer my reports to start with a short summary followed by action items."

When memory is enabled, the agent has a tool to search, save, update or forget at your request. You can also write a memory yourself with **Add**.

2. Check it in Memory

Open **Long-term memory**, find the memory and reread it. Correct it with **Update selected memory** if needed. Pin it only if it should guide most sessions.

3. Start a new session

Enable memory at startup, then ask for a report. You can also ask the agent to search for the saved preference to check that it can retrieve it.

4. Then import your history

Use **Import archive** for older checkpoints or summaries in Markdown (.md) or text (.txt) format. Review the proposals with **Review next source** before keeping them. Avoid pinning your entire history: essentials should stay short and relevant.

If some items remain pending

Automatic processing works in small batches, up to two batches per pass. **STOP** can interrupt it. Proposals without sufficiently valid sources are kept for manual review; already valid memories remain saved.

Extraction uses the selected model. With a remote provider, the necessary passages are sent to that provider. Memory is stored in **Checkpoints/long-term memory** inside the Workspace.

Give your agent a method

A **skill** is a reusable capability: instructions, possibly with examples, references or scripts. It helps the agent follow a method without making you paste it into every request.

Element	Role
Tool	Perform an action: read, search, execute or edit.
Skill	Explain a method for a type of task.
Memory	Keep a useful fact, preference or decision.

Add your first skill

1. Choose a trusted source and a folder containing **SKILL.md** in the Agent Skills format, including its metadata.
2. Open **Settings > Skills** in the correct Workspace.
3. Use **Import folder...** or **Import ZIP...** for an archive containing a single skill.
4. Read the description, prerequisites and **Read instructions**.
5. Activate it with **Enable selected skill**, then name it in your request for a first trial.


> “Use the proofreading skill we enabled to review this document.”

Loaded when needed

The agent receives a short catalogue of active skills and reads the relevant instructions with **read_file**. The entire contents are not loaded in advance.

Importing a skill does not run scripts or install dependencies. A skill designed for another environment may need adapting. An LM Studio plugin is not automatically a compatible skill.

Choose your active skills

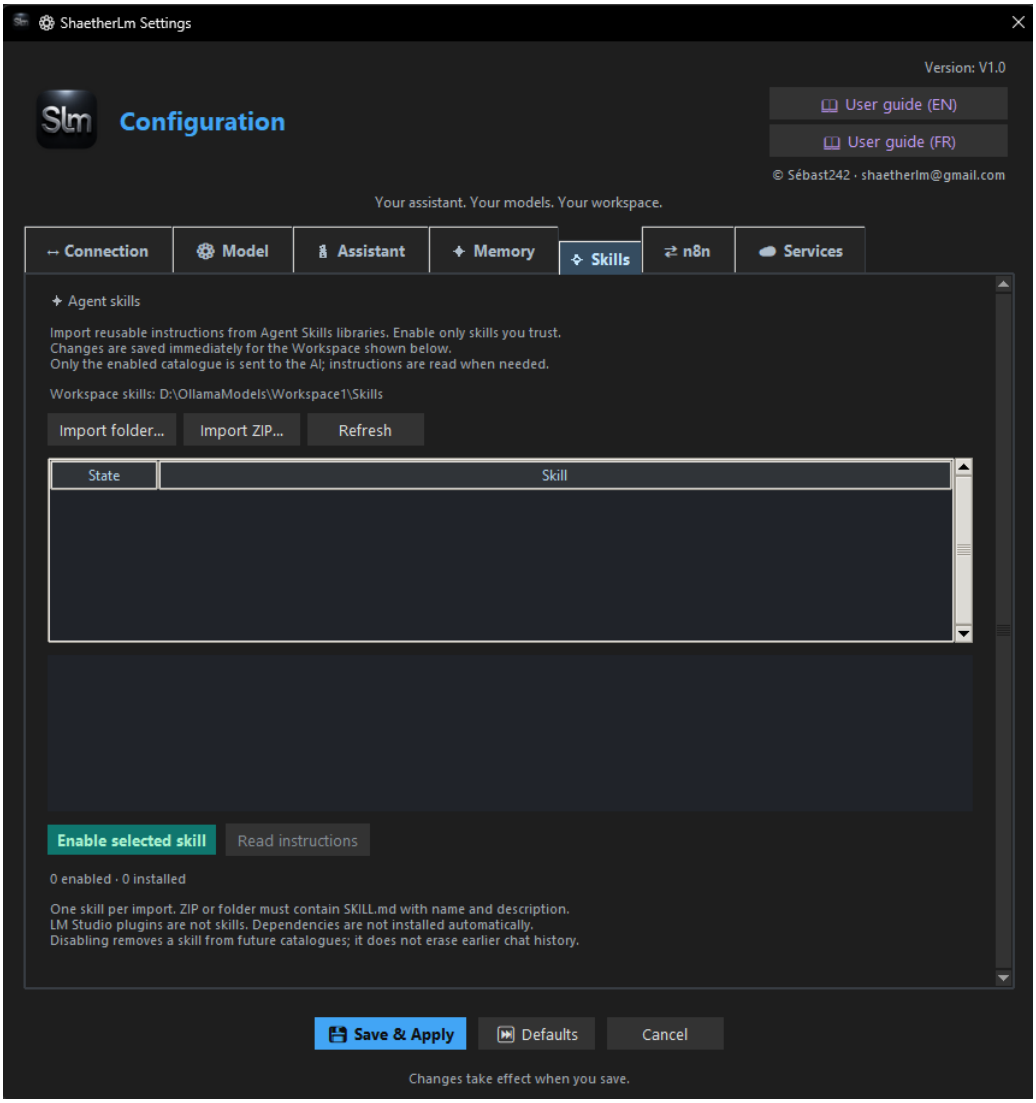


The Skills tab: import, read the instructions and enable only the skills useful for this Workspace.

Imported skills are **disabled by default**. Enabling and disabling are saved immediately, independently of Save & Apply.

Refresh reloads the catalogue after a local change. **Disable selected skill** removes a skill from upcoming catalogues without deleting its files or erasing instructions already read into the history.

Files are stored in **Workspace/Skills**. Imports are checked and do not overwrite an existing skill. Tool rules and permissions remain unchanged.

Choose where your AI runs

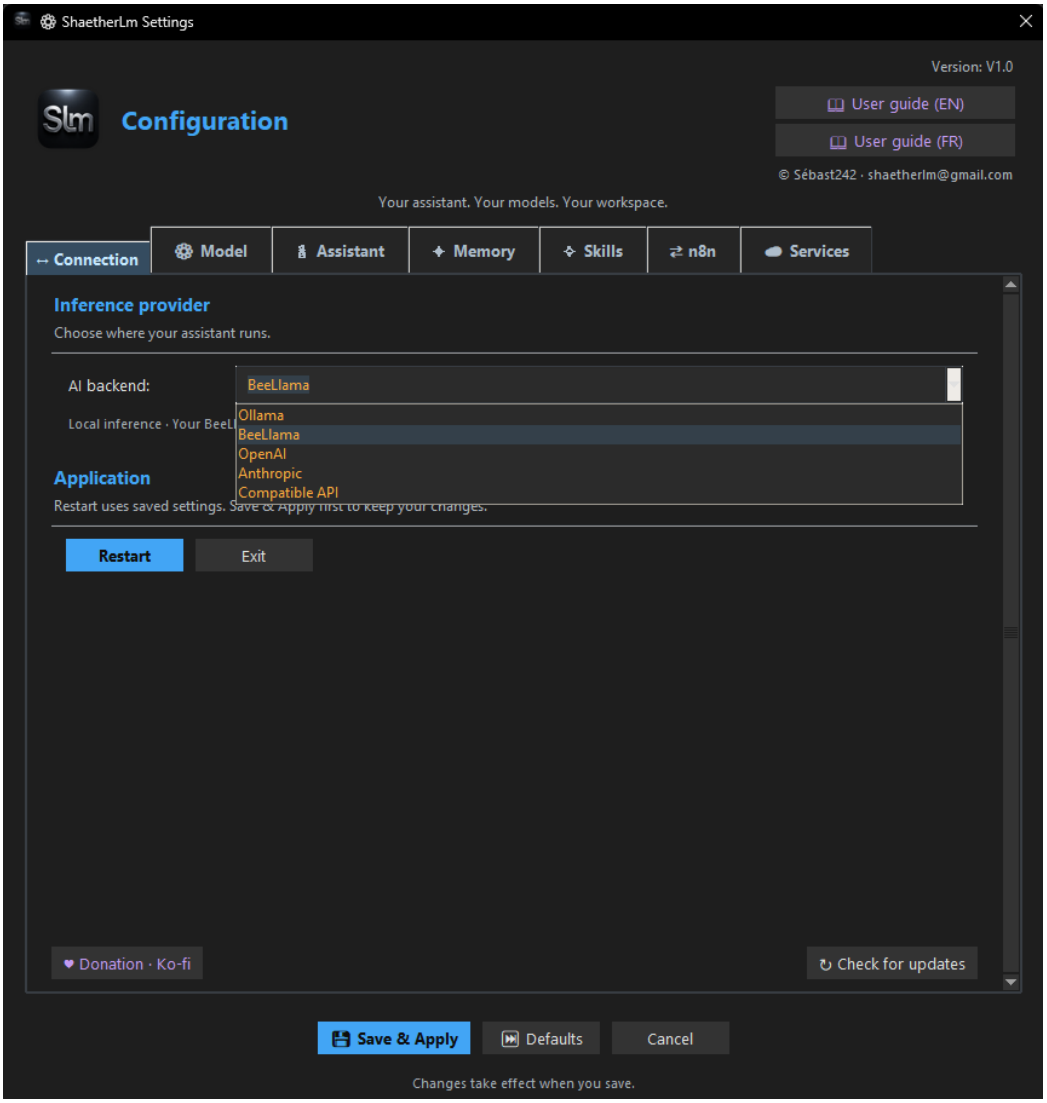


The engines and providers available in Connection. This session's values are examples.

Choose a provider, then enter the required connection details. Local engines need separate preparation; APIs usually require a key and may incur charges.

Save & Apply saves and applies your settings. Apply changes before using **Restart**, which relaunches the application. **Exit** and the main window's close button shut down the application through its stop-and-save procedure.

The guides are available here. **Check for updates** opens the releases page; it does not automatically replace the application. **Donation** takes you to Ko-fi to support the project.

Adjust the model's capacity

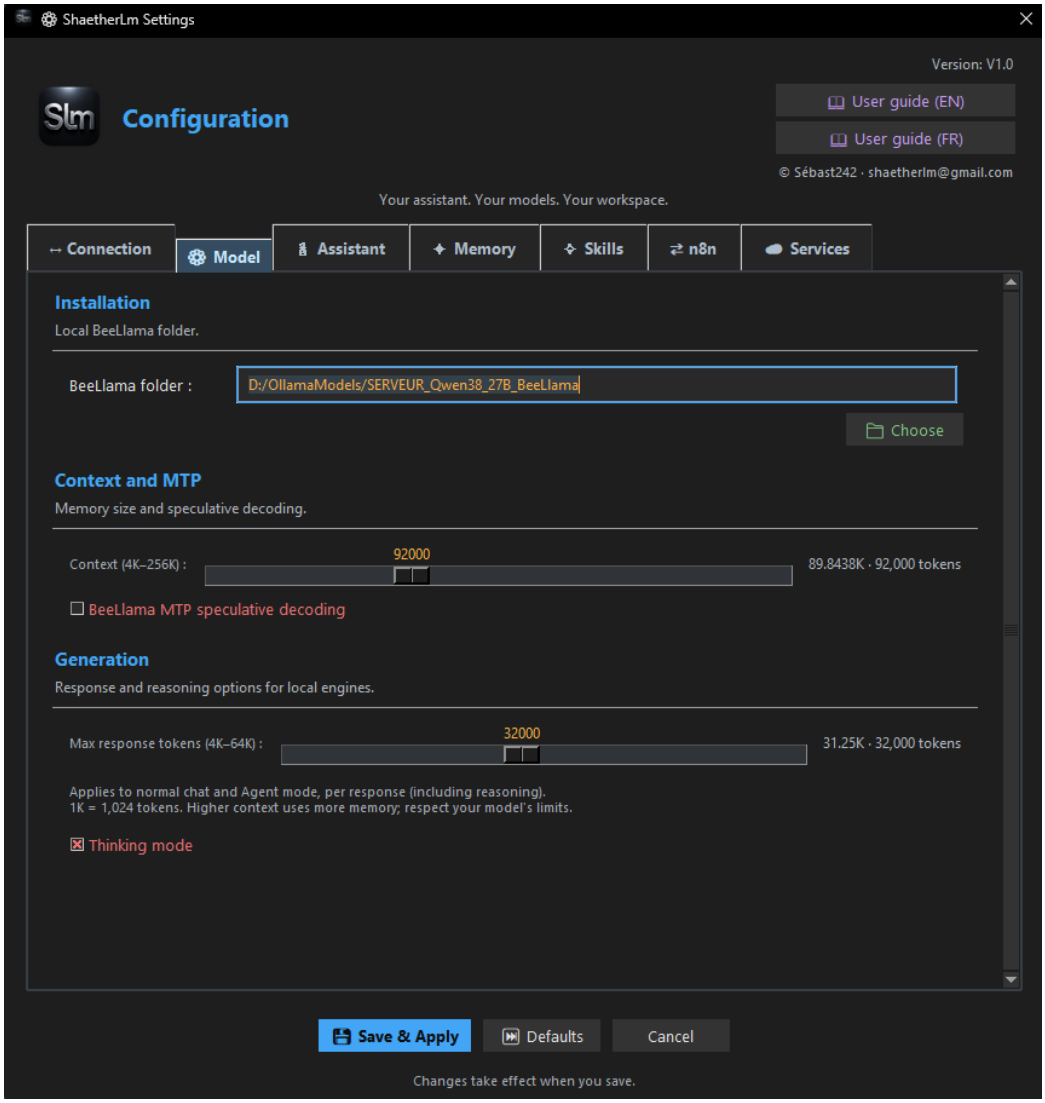


Model, BeeLlama folder, context, maximum response length and engine-specific options.

Context ranges from **4K to 256K**. **Max response tokens** ranges from **4K to 64K**, in both normal chat and Agent mode. The model's actual limit, remaining context and provider restrictions still apply.

The initial context setting is **90K**. This is not a universal recommendation: lower it if your computer is short on memory. Previously saved settings are retained.

Here, one K means 1,024 tokens; 92,000 tokens is therefore about 89.8K. Reasoning may consume part of the response budget. **Thinking** and **MTP** are two different options.

Your assistant, your autonomy

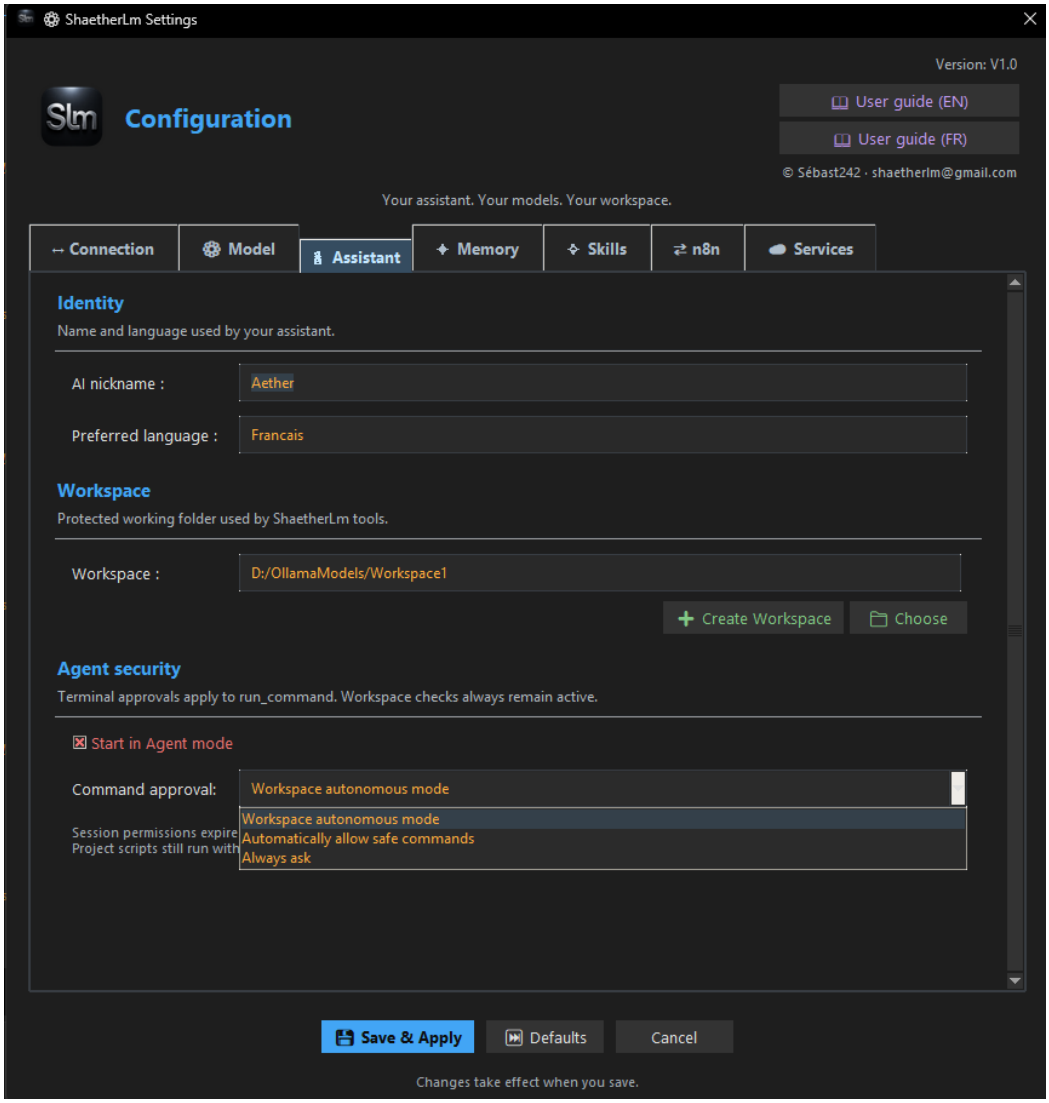


Name, language, Workspace and command approval policy.

The name personalizes the assistant and helps identify its memory profile. The preferred language applies to its replies. The Workspace defines its usual working area.

Under **Agent security**, choose **Workspace autonomous mode**, **Automatically allow safe commands** or **Always ask**. Autonomous mode is the default.

An approval request offers **Allow once**, **Always allow for this session** and **Refuse**. Session permission is not retained for the next launch. Blocked commands remain refused even in autonomous mode.

Choose when context is cleaned

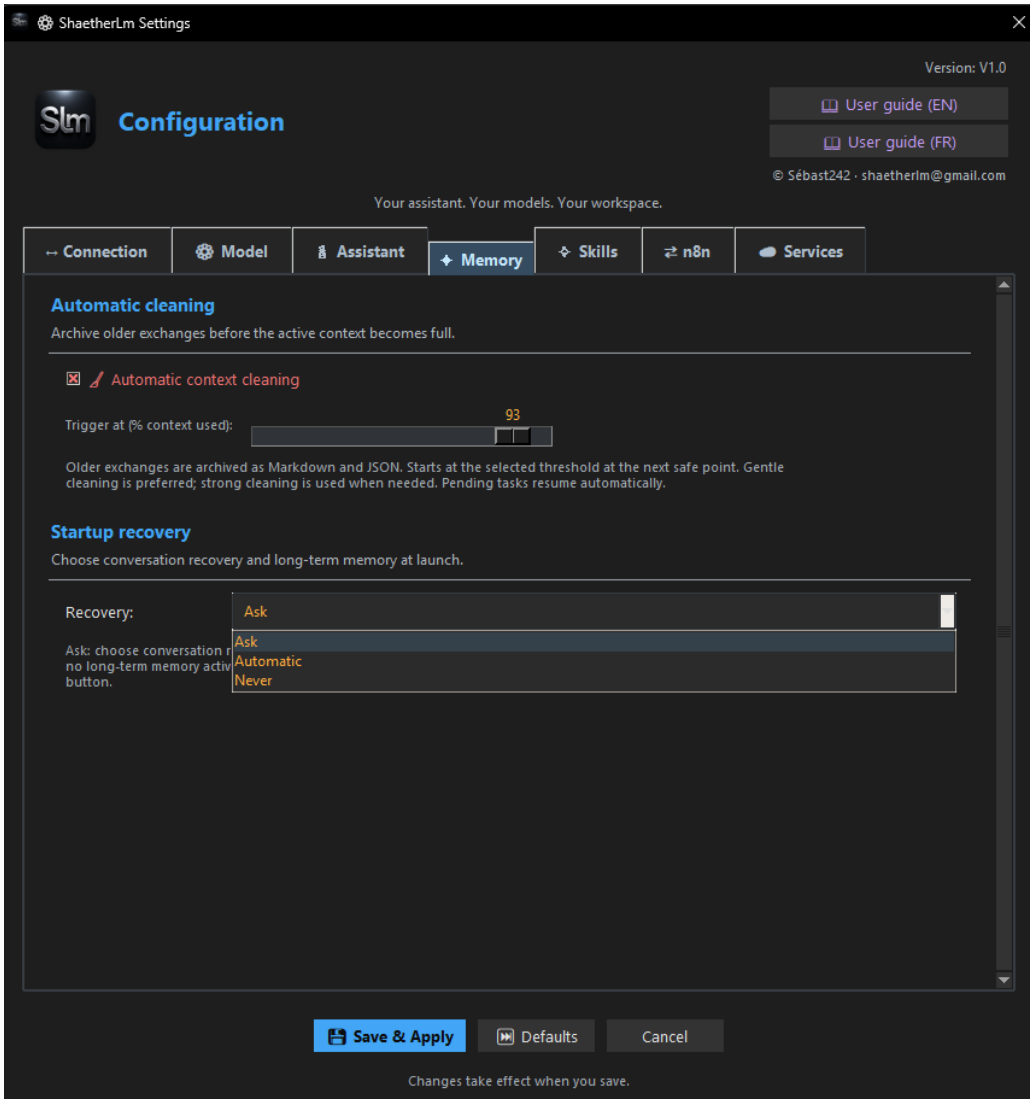


Automatic cleaning and recovery choices at startup.

Automatic Context Cleaning is enabled by default. The threshold ranges from **70 to 95%**, initially set to **93%**. It starts looking for a suitable moment rather than interrupting immediately at that exact percentage.

Automatic cleaning stays silent. Manual cleaning keeps its completion signal. Approval requests have their own audible alert.

Ask / Automatic / Never controls startup recovery. You can begin a new conversation while still using long-term memories.

Connect your automations

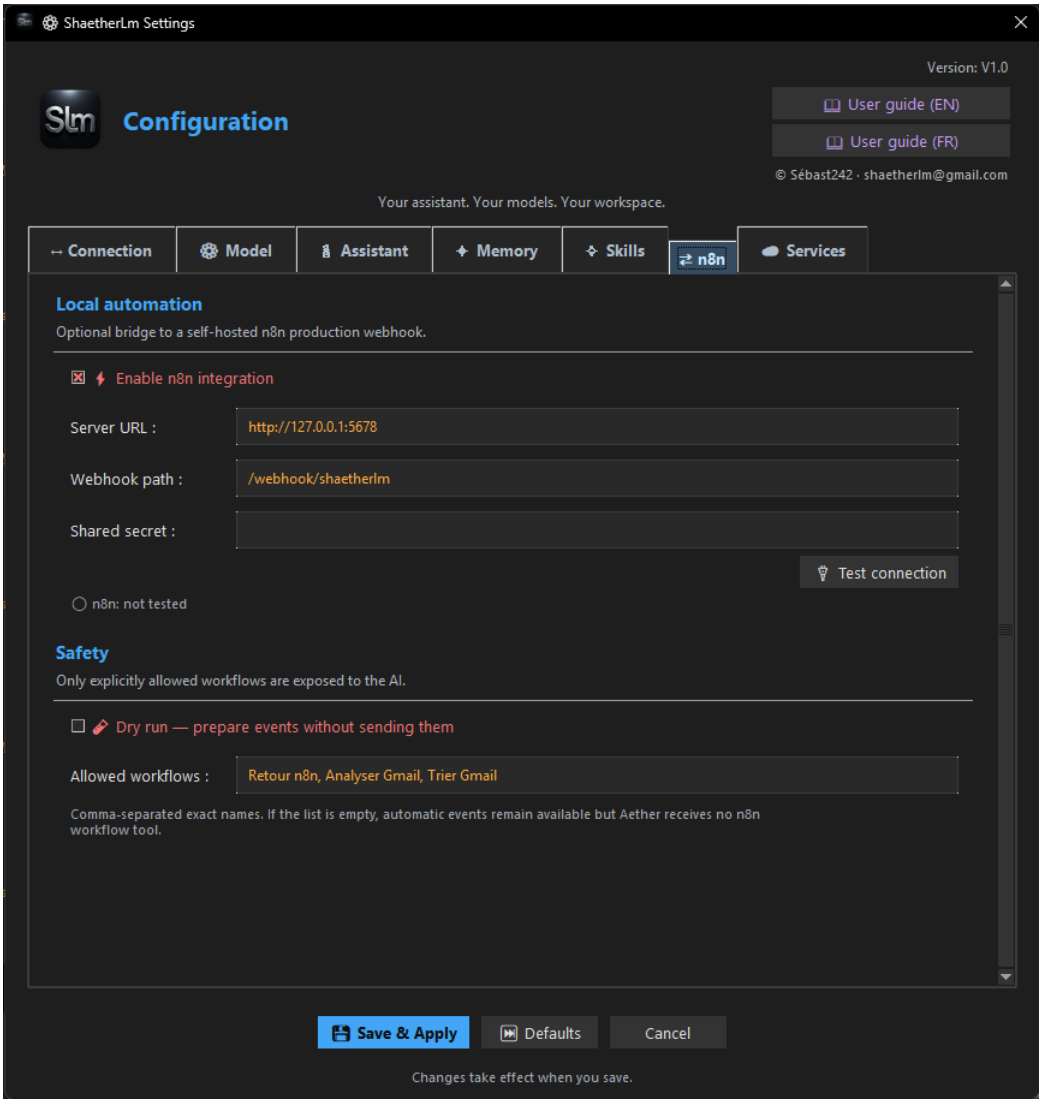


A local n8n configuration with explicitly authorized workflows.

n8n is optional and must be installed or accessible separately. Enter its address, production webhook and shared secret if your workflow requires one. **Allowed workflows** restricts the names the agent can request.

The secret is sent in the **X-ShaetherLm-Token** header. Configure the workflow to check it. A temporary test webhook is not a replacement for the production webhook.

Use **Dry run** to prepare trials and **Test connection** to check access. This test alone does not validate the full workflow. Also check the configured result files and Inbox.

Web, vision and voice

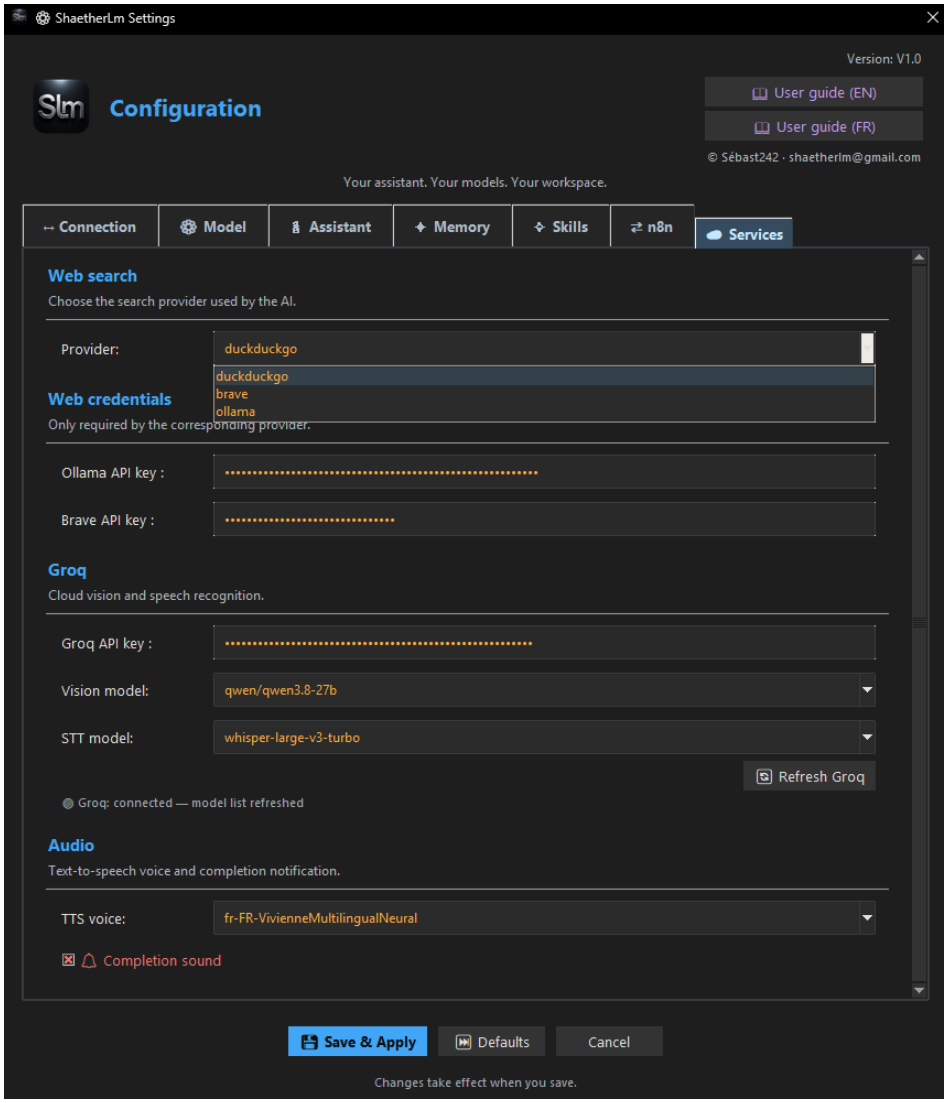

Optional services: search, Groq, Microsoft voices and the completion sound.

Choose an available search provider: **DuckDuckGo**, **Brave** or **Ollama Web**. Some require a key. Results and accessible pages depend on the service and websites.

The **Groq** key is used for the corresponding vision and speech recognition features. Refresh the models when needed and choose the Microsoft voice for Listen.

Completion sound is enabled by default. Each service remains optional: a local engine does not require you to enable all these features.

Prepare your preferred engine

Ollama

Install Ollama and download a model suited to your computer, preferably one that supports tools. Select Ollama in **Connection**, then refresh the models in **Model**. Its service must be available.

Ollama also offers cloud models: the conversation is then processed remotely and account conditions apply. Reference: Ollama documentation.

BeeLlama

Select the folder containing the server, its libraries, the compatible GGUF model and the chat template. ShaetherLm manages this local engine. Avoid running a second server on the same port.

The companion kit prepared for ShaetherLm uses **BeeLlama v0.4.9**, Windows **CUDA 13.3** binaries and a **Qwen3.8-27B** profile with a suitable quantization. The kit's profile starts at **64K**, with MTP disabled; increase it if your tests allow.

For an NVIDIA card with **16 GB of VRAM**, also allow enough system RAM and disk space. The kit recommends 32 GB of RAM and around 25 GB of free disk space. Actual speed depends on the card, drivers, model and context; 16 GB does not guarantee support for every profile.

To use the companion kit, extract it, run **INSTALL.cmd**, choose an empty folder and wait for file verification. Then select that folder in **Model > BeeLlama folder** and set context to 64K. Follow the kit's instructions for prerequisites and detailed checks.

Reference: BeeLlama v0.4.9 and its downloads.

OpenAI, Anthropic and compatible APIs

Enter the key and settings required by your chosen provider. For a compatible API, use the address and model identifier supplied by your service. Check its context limits and tool support.

Pricing, quotas and available models are determined by the provider. Increasing context does not fix an authentication or quota error.

Your agent's tools

ShaetherLm provides **17 built-in tools**, plus **n8n_run_workflow** when n8n and an authorized workflow are configured. Skills provide methods without automatically adding new tools.

Purpose	Tools
Files	list_files, read_file, write_file, search_in_files
Code and execution	apply_patch, run_command, python_exec
Documents	read_pdf, read_docx, read_excel, create_pdf
Web	web_search, web_fetch
Images	see_image
Calculation and date	calculate, get_datetime
Long-term memory	long_term_memory
Optional automation	n8n_run_workflow

Read what is needed

Listings, searches and reads can be targeted and paginated. The agent does not need to inventory thousands of files to find a document when you know its folder.

Check what was created

A command can run tests or an installed tool. **run_command** has no fixed time limit; **STOP** remains available and output is limited. **python_exec** retains its own limits.

Explore the Web

Search provides leads; **web_fetch** retrieves accessible content. Video transcript retrieval depends on availability and the website. An external transcription tool remains a separate addition.

Having access to a tool does not guarantee that every model will use it correctly. For sensitive work, require verification of the result.

Choose what stays local

Feature	Where data is processed
Local Ollama / BeeLlama model	On your computer for local inference.
API or cloud model	By the provider, for information sent to the model.
Web search and retrieval	By the services and websites being queried.
Groq vision and transcription	By Groq, for the data needed by these features.
Listen	By Microsoft, for text converted to speech.
Long-term memory	Stored in the Workspace; extraction uses the selected model.
n8n	Depends on your server and the services called by its workflows.

Safeguards and their scope

Tools check paths, commands and permissions. The Workspace is the intended boundary. However, a launched script or program runs with your Windows account permissions: the application does not provide complete system isolation.


Autonomous mode removes certain confirmations, not refusal checks. A malformed command may be returned to the agent for correction instead of prompting you for unnecessary approval.

Choose skills and external programs carefully. Keep API keys private and check screenshots or logs before sharing them.

Keep a useful backup

Back up your files, checkpoints and configuration before a major change. **Forget** removes a memory from recall but does not automatically erase its source documents or backups.

Make sense of the numbers

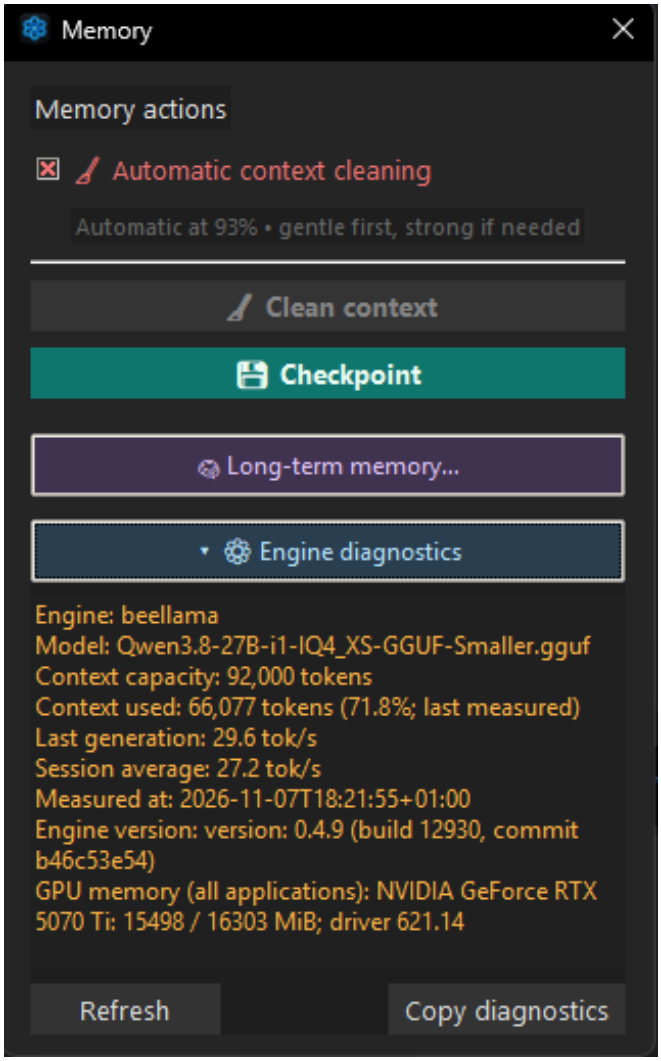

The Memory panel and engine diagnostics, available on demand.

Displayed context usage may be estimated until a reply provides the engine's measurement. Visible messages, active messages and archives do not represent the same amount of information sent to the model.

Tokens per second measures generation speed, not the full duration of a task: context processing, tools, networking and waiting may also contribute. Displayed GPU memory usage may include other applications.

These diagnostics help you compare your own trials with the same model and settings, without constantly cluttering the conversation.

Where to start

Symptom	First check
The engine will not start	Folder, model, key or address in Settings. Avoid two servers using the same port.
A quick restart fails	Wait until the engine has fully stopped before relaunching.
The model becomes slow	Reduce context and check memory usage; look at other applications.
Response limit reached without final text	Automatic recovery is limited. If needed, increase Max response tokens or split the task.
A command is refused	Ask the agent to read the reason and correct the request; do not bypass the refusal through another tool.
Memories need review	Open Long-term memory > Review next source. Already valid memories are retained.
A skill is not being used	Check its activation, Workspace and prerequisites; name it in your request.
Listen stops	Check Internet access and the service; try later or with another voice.
A document seems empty	Check its format: a scanned PDF may require image analysis.

Report a problem clearly

Include the action you took, the engine, the model and the exact error message. Add a screenshot if helpful, without API keys or unnecessary personal information.

If the agent loses the thread, provide the path to the latest verifiable file or checkpoint. A precise source is often more useful than another complete audit.

Your next task starts here

You do not need to use every feature. Start with a document, an idea or a real task. Add voice, a lasting memory, a skill or an automation when it becomes useful to you.

> “Help me organize this folder. Start with the top-level documents and suggest a structure before changing anything.”

> “Prepare an HTML page to present my project. Make a first version that I can open and comment on.”

> “Find our latest decision about this project in memory, then check the corresponding file before continuing.”

A few useful terms

Term	Meaning
Workspace	Your working folder for files and creations.
Model	The AI that produces replies and chooses tools.
Engine	The software or service that runs the model.
Context	Information taken into account for the reply.
Checkpoint	A handover record for resuming a task.
Skill	A reusable method the agent can consult.

Follow and support the project

Project overview · Releases and downloads · Support on Ko-fi

Contact: shaetherlm@gmail.com

ShaetherLm V1.0 · Freeware under a proprietary license · © Sébast242.

English guide, 7 November 2026. Screenshots show real sessions: paths, names, models and counters are examples. External services and their terms may change.