
Input Structure

```
[{
start: Number,
end: Number,
oriText: String,
}];
```

Example

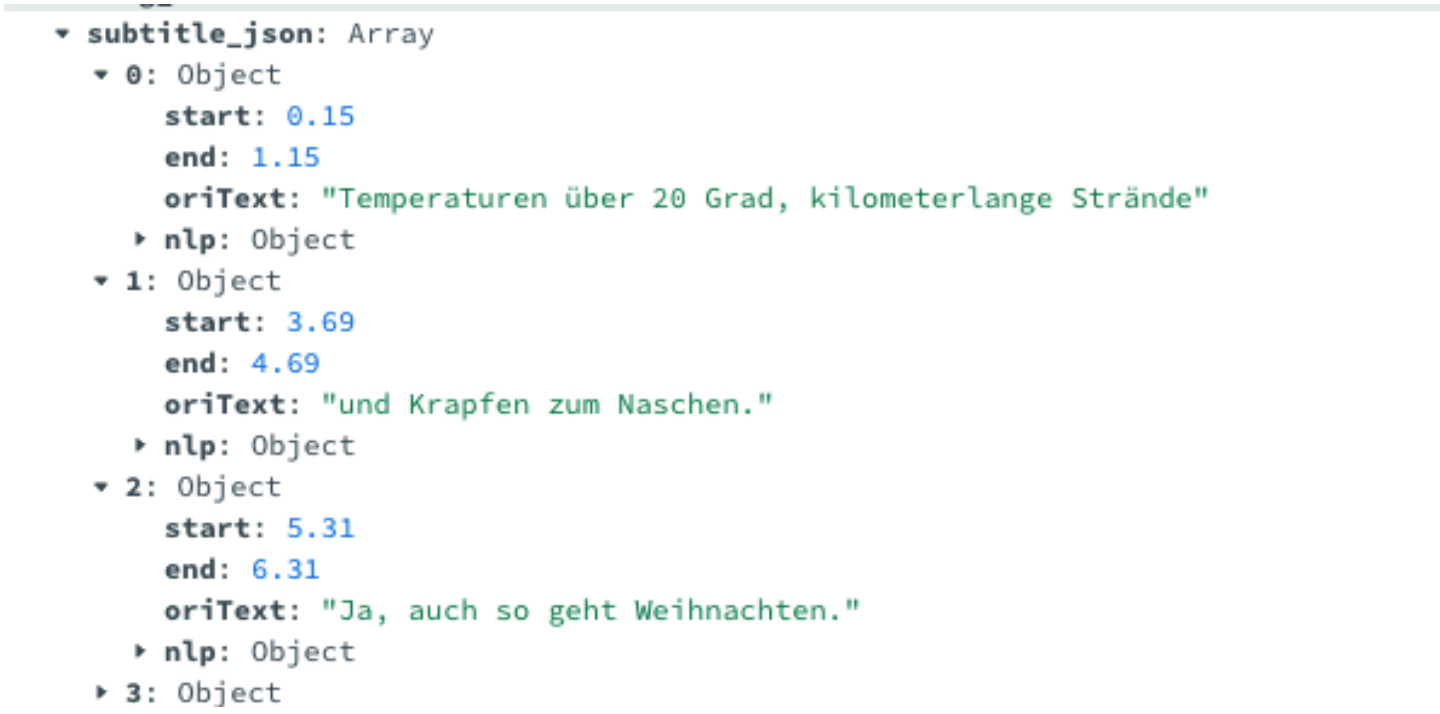

The total number of tokens processed in a single request (both prompt and completion) can't exceed the model's maximum context length. For most models, this is 2,048 tokens or about 1,500 words. As a rough rule of thumb, 1 token is approximately 4 characters or 0.75 words for English text. So this prop should be dynamic. It could be set up in a config file for the project or sent by param to the API.

Endpoints

POST /chunks

```
[
     {
      "start": 0.15,
      "end": 1.15,
      "oriText": "Temperaturen über 20 Grad, kilometerlange Strände",
    },
    {
      "start": 3.69,
      "end": 4.69,
      "oriText": "und Krapfen zum Naschen.",
    },
    {
      "start": 5.31,
      "end": 6.31,
      "oriText": "Ja, auch so geht Weihnachten.",
    }
]
```

Return

Responses

- 200 OK with the example output.
- 400 Bad Request When there is a failure in the request format, expected headers, or the payload can't be unmarshaled.

Example output

[
{
"chunkNumber": 1,
"oriText": "Temperaturen über 20 Grad, kilometerlange Strände und Krapfen zum Naschen. Ja, auch so geht Weihnachten"
}

]

References

https://www.restapitutorial.com/lessons/httpmethods.html
https://medium.com/featurepreneur/build-your-own-rest-api-in-express-a75aef76b835