
Table of Contents

Homework #5	1
Optional overhead	1
Optimization settings	1
Run optimization	2
Report	2

Homework #5

Sebastian Garcia Peralta 1213082648

```
% To see the output of the following code please refer to: https://github.com/sebastiangularper/DesignOptimization2021Fall/blob/main/Homework/Homework5\_pdf.pdf
```

```
%%%%%%%%%%%%%%%% Main Entrance %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%
%%%%%%%%%%%%%%%% By Max Yi Ren and Emrah Bayrak %%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%
```

```
% Instruction: Please read through the code and fill in blanks
% (marked by ***). Note that you need to do so for every involved
% function, i.e., m files.
```

Optional overhead

```
clear; % Clear the workspace
close all; % Close all windows
```

Optimization settings

Here we specify the objective function by giving the function handle to a variable, for example:

```
f = @(x)x(1)^2+(x(2)-3)^2; % replace with your objective function
% In the same way, we also provide the gradient of the
% objective:
df = @(x)[2*x(1) , 2*(x(2)-3)]; % replace accordingly

g = @(x)[x(2)^2-2*x(1); (x(2)-1)^2+5*x(1)-15];
dg = @(x)[-2 2*x(2); 5 2*(x(2)-1)] ;

% Note that explicit gradient and Hessian information is only
% optional.
% However, providing these information to the search algorithm will
% save
% computational cost from finite difference calculations for them.

% % Specify algorithm
opt.alg = 'myqp'; % 'myqp' or 'matlabqp'
```

```
% Turn on or off line search. You could turn on line search once other
% parts of the program are debugged.
opt.linesearch = true; % false or true

% Set the tolerance to be used as a termination criterion:
opt.eps = 1e-3;

% Set the initial guess:
x0 = [1;1];

% Feasibility check for the initial point.
if max(g(x0)>0)
    error('Infeasible initial point! You need to start from a
    feasible one!');
    return
end
```

Run optimization

Run your implementation of SQP algorithm. See `mysqp.m`

```
solution = mysqp(f, df, g, dg, x0, opt);

optimalsolution = solution.x(:,end);
goutput = g(solution.x(:,end))
foutput = f(solution.x(:,end))

sprintf('The optimal solution "converges" to
x1 = (%.5g, %.5g). g = (%.3g, %.3g), and f =
%.5g', optimalsolution(1), optimalsolution(2), goutput(1), goutput(2), foutput)

goutput =

    0.0001
   -9.4897

foutput =

    3.5074

ans =

    'The optimal solution "converges" to x1 = (1.0604, 1.4563). g =
(7.97e-05, -9.49), and f = 3.5074'
```

Report

```
report(solution,f,g);
```

```

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% Sequential Quadratic Programming Implementation with
BFGS %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% By Max Yi Ren and Emrah Bayrak %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

function solution = mysqp(f, df, g, dg, x0, opt)
    % Set initial conditions

    x = x0; % Set current solution to the initial guess

    % Initialize a structure to record search process
    solution = struct('x',[]);
    solution.x = [solution.x, x]; % save current solution to
solution.x

    % Initialization of the Hessian matrix
    W = eye(numel(x)); % Start with an identity Hessian
matrix
    % Initialization of the Lagrange multipliers
    mu_old = zeros(size(g(x))); % Start with zero Lagrange
multiplier estimates
    % Initialization of the weights in merit function
    w = zeros(size(g(x))); % Start with zero weights

    % Set the termination criterion
    gnorm = norm(df(x) + mu_old'*dg(x)); % norm of Largangian gradient

    while gnorm>opt.eps % if not terminated

        % Implement QP problem and solve
        if strcmp(opt.alg, 'myqp')
            % Solve the QP subproblem to find s and mu (using your own
method)
            [s, mu_new] = solveqp(x, W, df, g, dg);
        else
            % Solve the QP subproblem to find s and mu (using MATLAB's
solver)
            qpalg = optimset('Algorithm', 'active-
set', 'Display', 'off');
            [s,~,~,~,lambda] = quadprog(W,[df(x)]',dg(x),-g(x),[], [],
[], [], [], qpalg);
            mu_new = lambda.ineqlin;
        end

        % opt.linesearch switches line search on or off.
        % You can first set the variable "a" to different constant
values and see how it
        % affects the convergence.
        if opt.linesearch

```

```

        [a, w] = lineSearch(f, df, g, dg, x, s, mu_old, w);
    else
        a = 0.1;
    end

    % Update the current solution using the step
    dx = a*s;           % Step for x
    x = x + dx;         % Update x using the step

    % Update Hessian using BFGS. Use equations (7.36), (7.73) and
    (7.74)
    % Compute y_k
    y_k = [df(x) + mu_new'*dg(x) - df(x-dx) - mu_new'*dg(x-dx)]';
    % Compute theta
    if dx'*y_k >= 0.2*dx'*W*dx
        theta = 1;
    else
        theta = (0.8*dx'*W*dx)/(dx'*W*dx-dx'*y_k);
    end
    % Compute dg_k
    dg_k = theta*y_k + (1-theta)*W*dx;
    % Compute new Hessian
    W = W + (dg_k*dg_k')/(dg_k'*dx) - ((W*dx)*(W*dx)')/(dx'*W*dx);

    % Update termination criterion:
    gnorm = norm(df(x) + mu_new'*dg(x)); % norm of Largangian
    gradient
    mu_old = mu_new;

    % save current solution to solution.x
    solution.x = [solution.x, x];
end
end

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%The following code performs line search on the merit function

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

% Armijo line search
function [a, w] = lineSearch(f, df, g, dg, x, s, mu_old, w_old)
    t = 0.1; % scale factor on current gradient: [0.01, 0.3]
    b = 0.8; % scale factor on backtracking: [0.1, 0.8]
    a = 1; % maximum step length

    D = s;           % direction for x

    % Calculate weights in the merit function using equation (7.77)
    w = max(abs(mu_old), 0.5*(w_old+abs(mu_old)));

```

```

% terminate if line search takes too long
count = 0;
while count<100
    % Calculate phi(alpha) using merit function in (7.76)
    phi_a = f(x + a*D) + w'*abs(min(0, -g(x+a*D)));

    % Caluclate psi(alpha) in the line search using phi(alpha)
    phi0 = f(x) + w'*abs(min(0, -g(x))); % phi(0)
    dphi0 = df(x)*D + w'*((dg(x)*D).*(g(x)>0)); % phi'(0)
    psi_a = phi0 + t*a*dphi0; % psi(alpha)
    % stop if condition satisfied
    if phi_a<psi_a;
        break;
    else
        % backtracking
        a = a*b;
        count = count + 1;
    end
end
end

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%The following code solves the QP subproblem using active set strategy

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

function [s, mu0] = solveqp(x, W, df, g, dg)
% Implement an Active-Set strategy to solve the QP problem given
by
% min      (1/2)*s'*W*s + c'*s
% s.t.     A*s-b <= 0
%
% where As-b is the linearized active constraint set

% Strategy should be as follows:
% 1-) Start with empty working-set
% 2-) Solve the problem using the working-set
% 3-) Check the constraints and Lagrange multipliers
% 4-) If all constraints are staisfied and Lagrange multipliers
are positive, terminate!
% 5-) If some Lagrange multipliers are negative or zero, find the
most negative one
%      and remove it from the active set
% 6-) If some constraints are violated, add the most violated one
to the working set
% 7-) Go to step 2

% Compute c in the QP problem formulation

```

```

c = [df(x)]';

% Compute A in the QP problem formulation
A0 = dg(x);

% Compute b in the QP problem formulation
b0 = -g(x);

% Initialize variables for active-set strategy
stop = 0;           % Start with stop = 0
% Start with empty working-set
A = [];             % A for empty working-set
b = [];             % b for empty working-set
% Indices of the constraints in the working-set
active = [];        % Indices for empty-working set

while ~stop % Continue until stop = 1
    % Initialize all mu as zero and update the mu in the working
set
    mu0 = zeros(size(g(x)));

    % Extract A corresponding to the working-set
    A = A0(active,:);
    % Extract b corresponding to the working-set
    b = b0(active);

    % Solve the QP problem given A and b
    [s, mu] = solve_activeset(x, W, c, A, b);
    % Round mu to prevent numerical errors (Keep this)
    mu = round(mu*1e12)/1e12;

    % Update mu values for the working-set using the solved mu
values
    mu0(active) = mu;

    % Calculate the constraint values using the solved s values
    gcheck = A0*s-b0;

    % Round constraint values to prevent numerical errors (Keep
this)
    gcheck = round(gcheck*1e12)/1e12;

    % Variable to check if all mu values make sense.
    mucheck = 0;           % Initially set to 0

    % Indices of the constraints to be added to the working set
    Iadd = [];             % Initialize as empty vector
    % Indices of the constraints to be added to the working set
    Iremove = [];          % Initialize as empty vector

    % Check mu values and set mucheck to 1 when they make sense
    if (numel(mu) == 0)
        % When there no mu values in the set
        mucheck = 1;       % OK

```

```

elseif min(mu) > 0
    % When all mu values in the set positive
    mucheck = 1;          % OK
else
    % When some of the mu are negative
    % Find the most negative mu and remove it from active set
    [~,Iremove] = min(mu); % Use Iremove to remove the
constraint
end

% Check if constraints are satisfied
if max(gcheck) <= 0
    % If all constraints are satisfied
    if mucheck == 1
        % If all mu values are OK, terminate by setting stop =
1
        stop = 1;
    end
else
    % If some constraints are violated
    % Find the most violated one and add it to the working set
    [~,Iadd] = max(gcheck); % Use Iadd to add the constraint
end
% Remove the index Iremove from the working-set
active = setdiff(active, active(Iremove));
% Add the index Iadd to the working-set
active = [active, Iadd];

% Make sure there are no duplications in the working-set (Keep
this)
active = unique(active);
end
end

function [s, mu] = solve_activeset(x, W, c, A, b)
    % Given an active set, solve QP

    % Create the linear set of equations given in equation (7.79)
    M = [W, A'; A, zeros(size(A,1))];
    U = [-c; b];
    sol = M\U;          % Solve for s and mu

    s = sol(1:numel(x));          % Extract s from the solution
    mu = sol(numel(x)+1:numel(sol)); % Extract mu from the solution

end

function report(solution,foutput,goutput)

f3dimensional = @(x,y) x.^2+(y-3).^2;
close all
figure
x=-5:.05:5;

```


```

y=-.5:.05:5;
[X,Y]=meshgrid(x,y);

figure(1); hold on
plot(solution.x(1,:),solution.x(2,:))
plot(solution.x(1,end),solution.x(2,end),'*')
contour(X,Y,f3dimensional(X,Y),30)
xlim([-0.5 5]);ylim([-0.5 5])
legend('Solution Convergence','Optimal Solution')
title('Trajectory of Optimal Solution')
xlabel('x_1');ylabel('x_2')

end

```

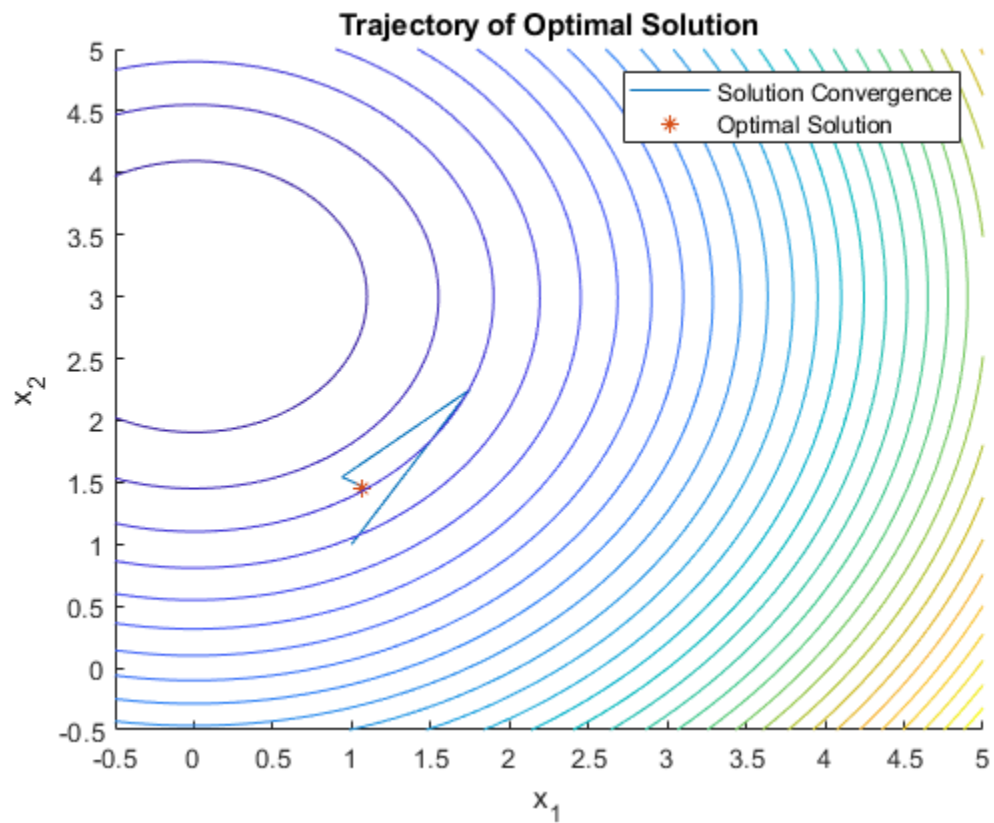

Published with MATLAB® R2019b