
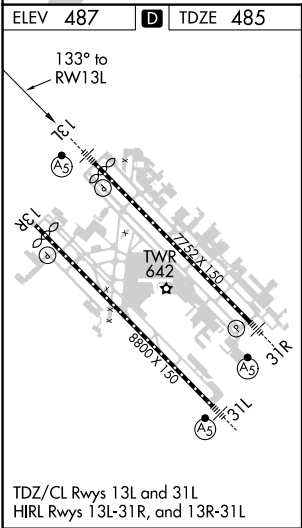


WAAS CH 99723 W13B	APP CRS 133°	Rwy Idg 7352 TDZE 485 Apt Elev 487
--	------------------------	---

RNAV (GPS) Z RWY 13L
DALLAS LOVE FLD (DAL)

RNP APCH.					MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLDO and hold.
Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.						
D-ATIS 120.15	REGIONAL APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CINC DEL 127.9	CPDLC	

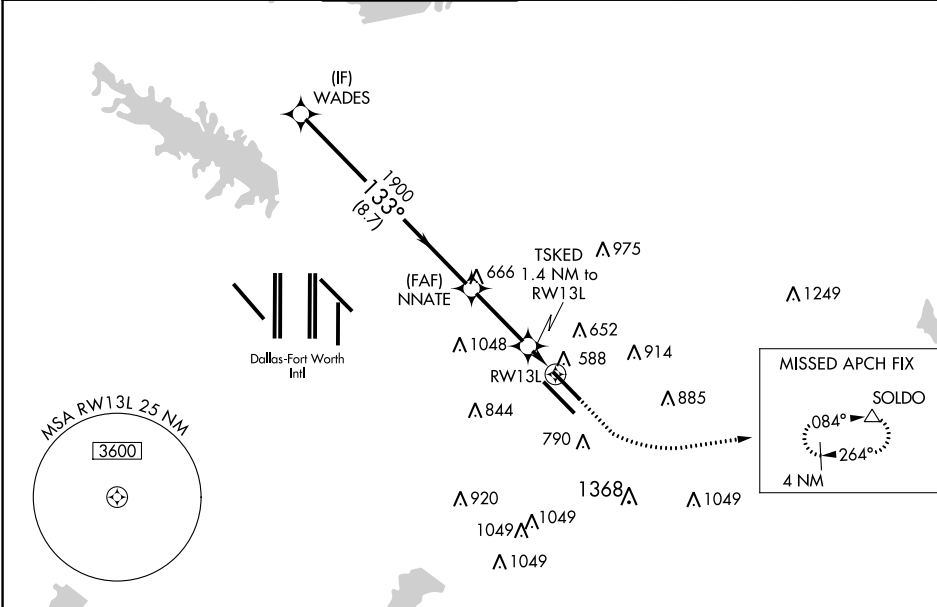

WADES				1000	3000	SOLDO
2500				↑	↪	△
GP 3.00° TCH 55				*LNAV only.		
133° to RW13L				TSKED 1.4 NM to RW13L		
1900				RW13L		
8.7 NM				2.9 NM		
CATEGORY				1.4 NM		
LPV DA				685/18 200 (200-½)		
LNAV/VNAV DA				764/24 279 (300-½)		
LNAV MDA				840/24 355 (400-½) 840/30 355 (400-¾)		
CIRCLING				1000-1 513 (600-1) 1140-1 653 (700-1) 1220-2 733 (800-2) 1520-3 1033 (1100-3)		

SC-2, 27 JAN 2022 to 24 FEB 2022

SC-2, 27 JAN 2022 to 24 FEB 2022