

LOC/DME	I-GSP	Rwy Idg	11001
109.3		TDZE	947
Chan 30	APP CRS	Apt Elev	964
	038°		

ILS or LOC RWY 4
GREENVILLE SPARTANBURG INTL (GSP)



DME required.

For inop ALS, increase S-LOC 4 Cats C and D visibility to RVR 5500. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase DA to 1176 feet; increase all MDAs 40 feet and visibility S-LOC 4 Cat C/D to RVR 4000 and Circling Cat D ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase S-LOC 4 Cats C/D visibility to RVR 6000.


ALSF-2

MISSED APPROACH:
Climb to 3000 then right turn direct SPA VORTAC and hold.

ATIS 134.25	GREER APP CON ★ 118.8 270.275	GREER TOWER ★ 120.1 (CTAF) 251.15	GND CON 121.9	UNICOM 122.95
----------------	----------------------------------	--------------------------------------	------------------	------------------

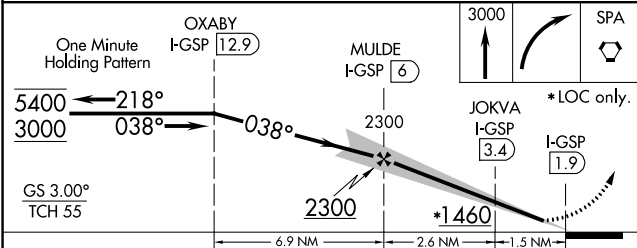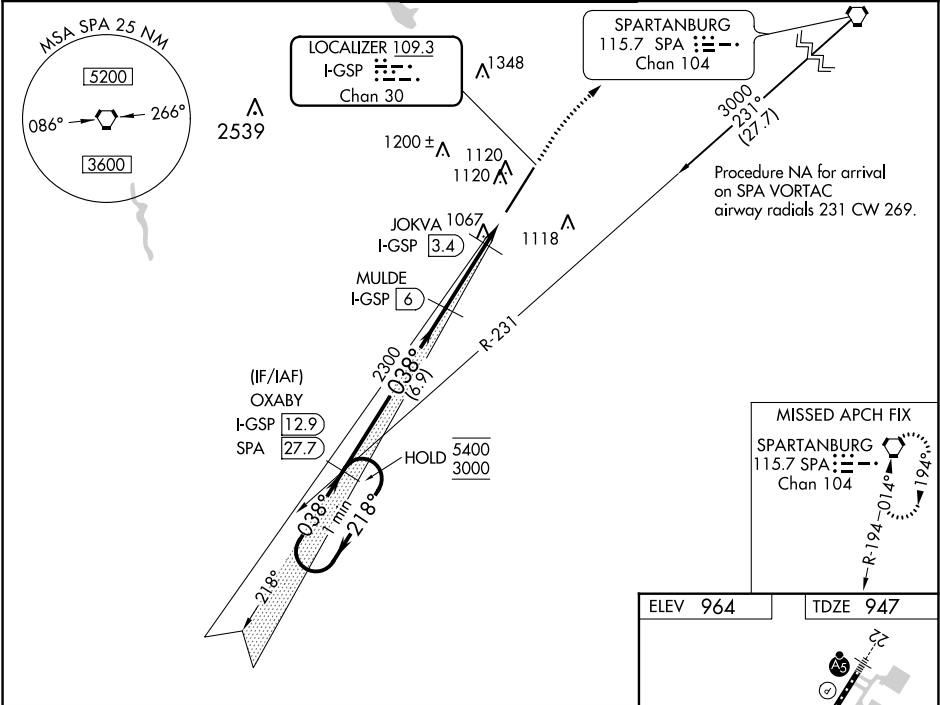

CATEGORY	A	B	C	D
S-ILS 4	1147/18	200 (200-½)		
S-LOC 4	1320/24	373 (400-½)	1320/35	373 (400-¾)
CIRCLING	1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)

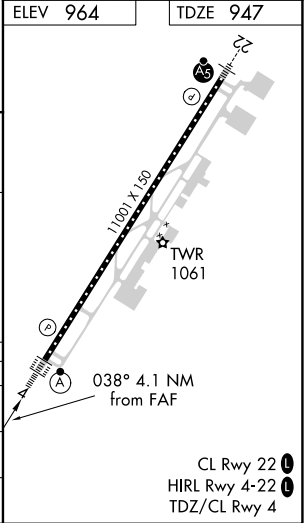

SE-2, 27 JAN 2022 to 24 FEB 2022

SE-2, 27 JAN 2022 to 24 FEB 2022