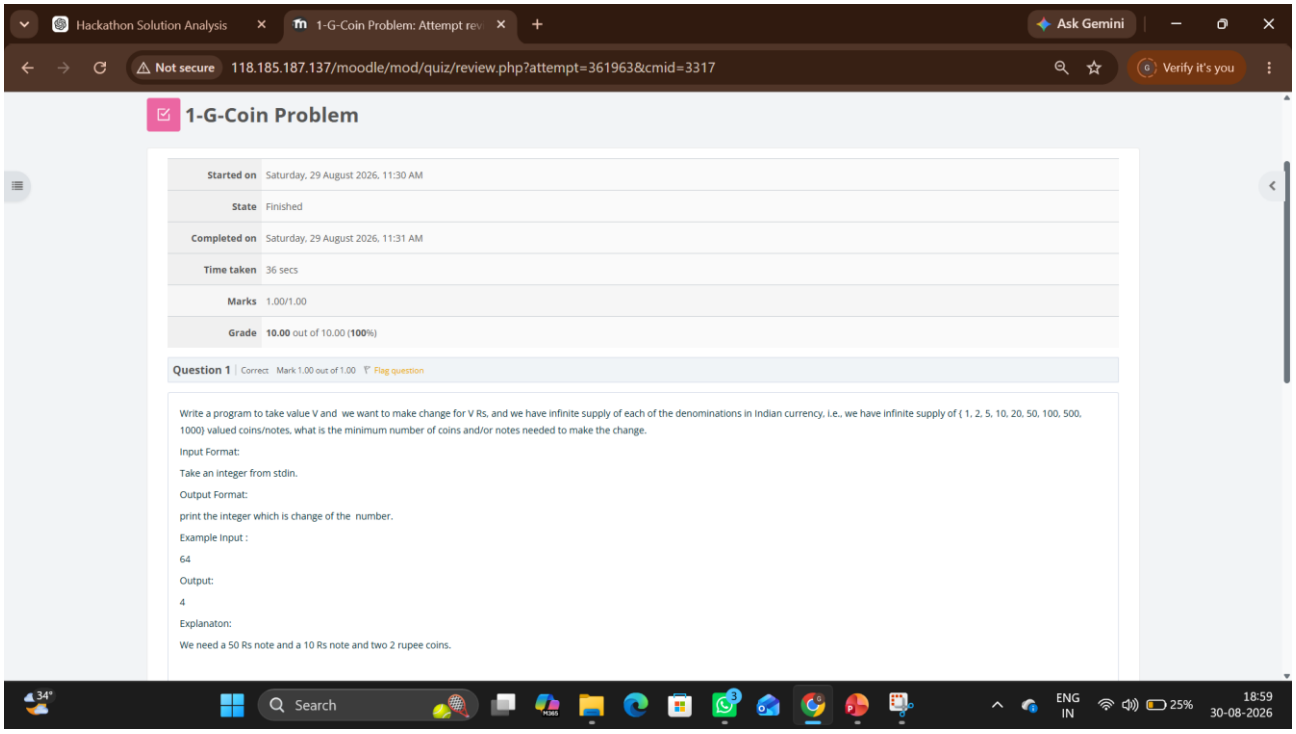
DAA

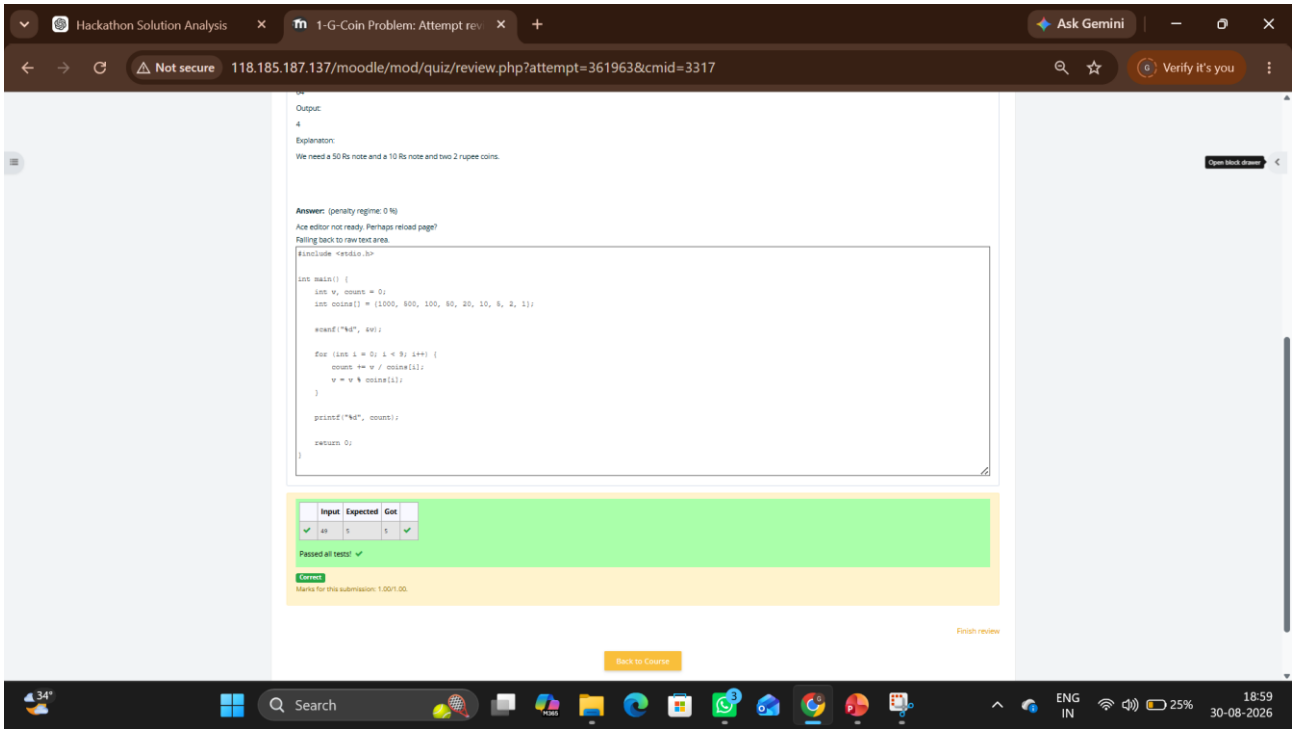
Pratical

Name	SEBASTIN ARUL SHELDON A
Roll No / Register No	250701975
Subject	DAA
Date	30-08-2026

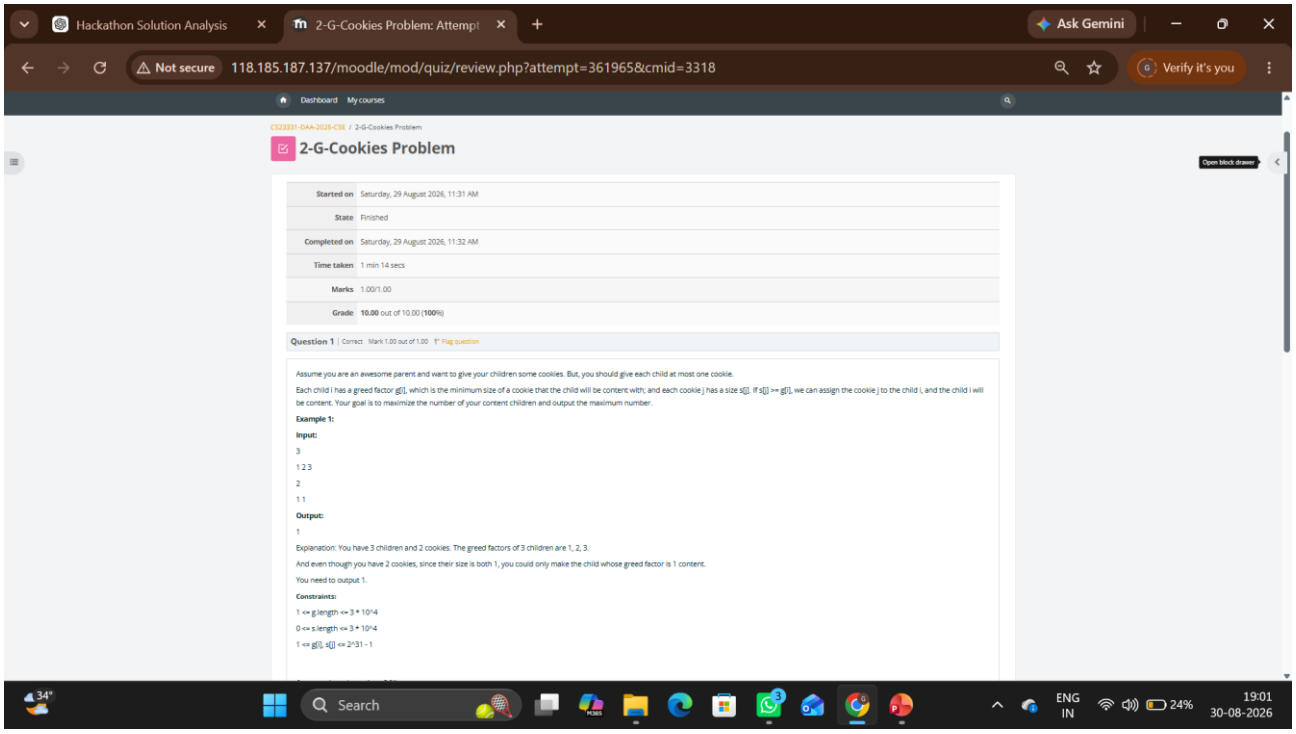
Question 1



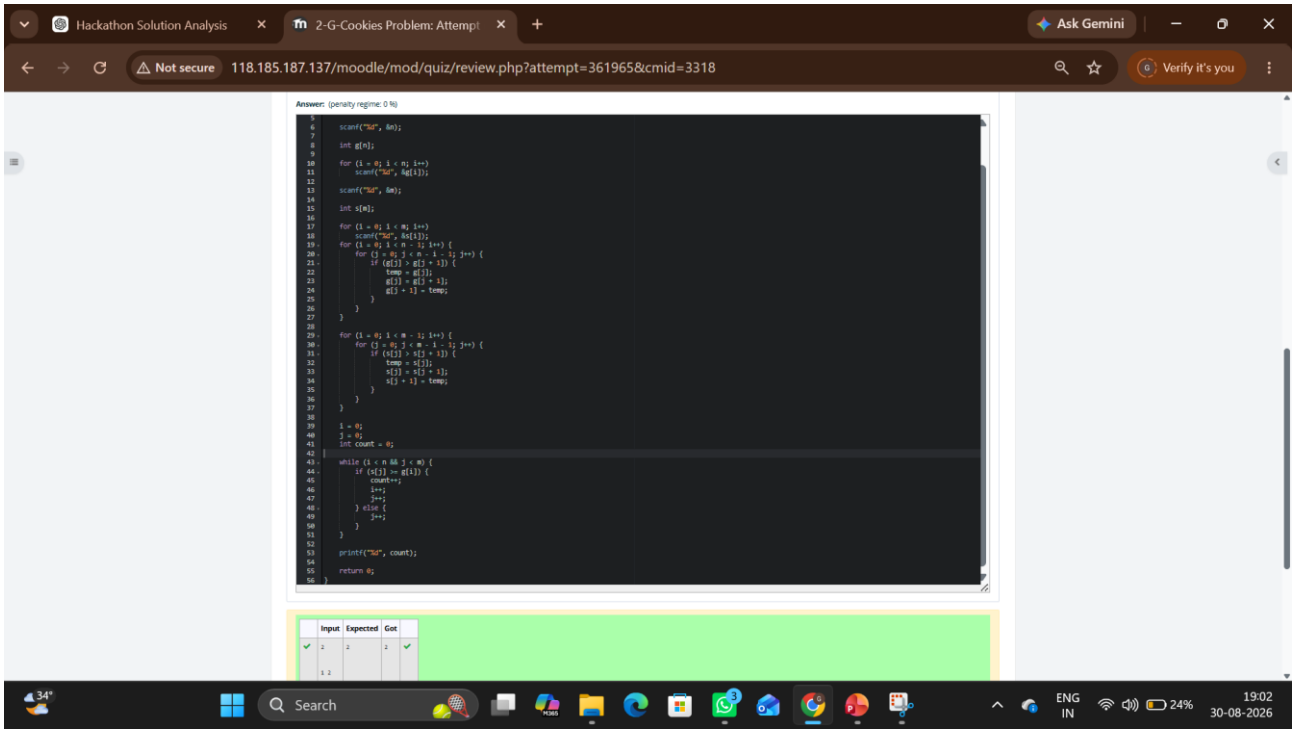
Question 2


Hackathon Solution Analysis
1-G-Coin Problem: Attempt rev
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361963&cmid=3317
Verify it's you
Output:
4
Explanation:
We need a 50 Rs note and a 10 Rs note and two 2 rupee coins.
Open block drawer
Answer: (penalty regime: 0 %)
Ace editor not ready. Perhaps reload page?
Falling back to raw text area.
#include <stdio.h>
int main() {
int v, count = 0;
int coins[] = {1000, 500, 100, 50, 20, 10, 5, 2, 1};
scanf("%d", &v);
for (int i = 0; i < 9; i++) {
count += v / coins[i];
v = v % coins[i];
}
printf("%d", count);
return 0;
}
Input
Expected
Got
49
5
5
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
34°
Search
ENG
IN
25%
18:59
30-08-2026

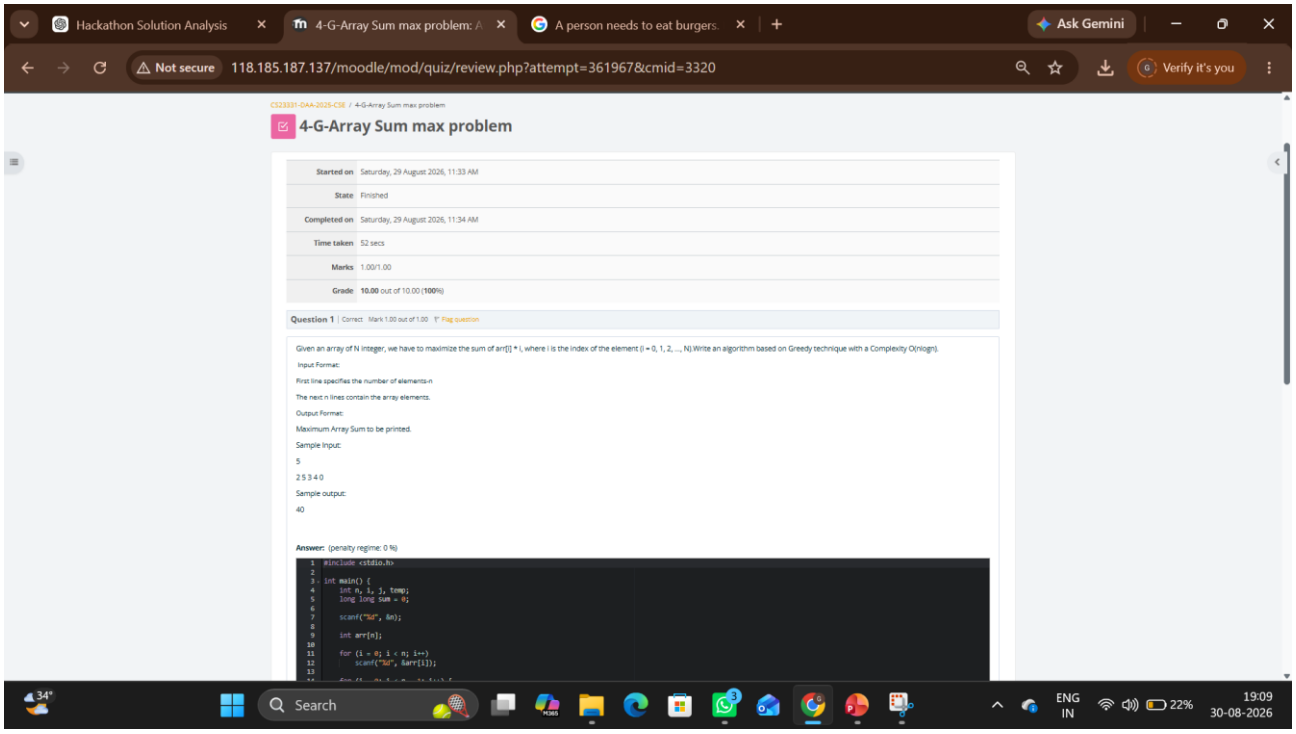
Question 3


Hackathon Solution Analysis
2-G-Cookies Problem: Attempt
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361965&cmid=3318
Verify it's you
Dashboard
My courses
CS23331-DAA-2025-CSE / 2-G-Cookies Problem
2-G-Cookies Problem
Open block drawer
Started on Saturday, 29 August 2026, 11:31 AM
State Finished
Completed on Saturday, 29 August 2026, 11:32 AM
Time taken 1 min 14 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct Mark 1.00 out of 1.00 Flag question
Assume you are an awesome parent and want to give your children some cookies. But, you should give each child at most one cookie.
Each child i has a greed factor g[i], which is the minimum size of a cookie that the child will be content with; and each cookie j has a size s[j]. If s[j] >= g[i], we can assign the cookie j to the child i, and the child i will be content. Your goal is to maximize the number of your content children and output the maximum number.
Example 1:
Input:
3
1 2 3
2
1 1
Output:
1
Explanation: You have 3 children and 2 cookies. The greed factors of 3 children are 1, 2, 3.
And even though you have 2 cookies, since their size is both 1, you could only make the child whose greed factor is 1 content.
You need to output 1.
Constraints:
1 <= g.length <= 3 * 10^4
0 <= s.length <= 3 * 10^4
1 <= g[i], s[j] <= 2^31 - 1
34°
Search
ENG
IN
24%
19:01
30-08-2026

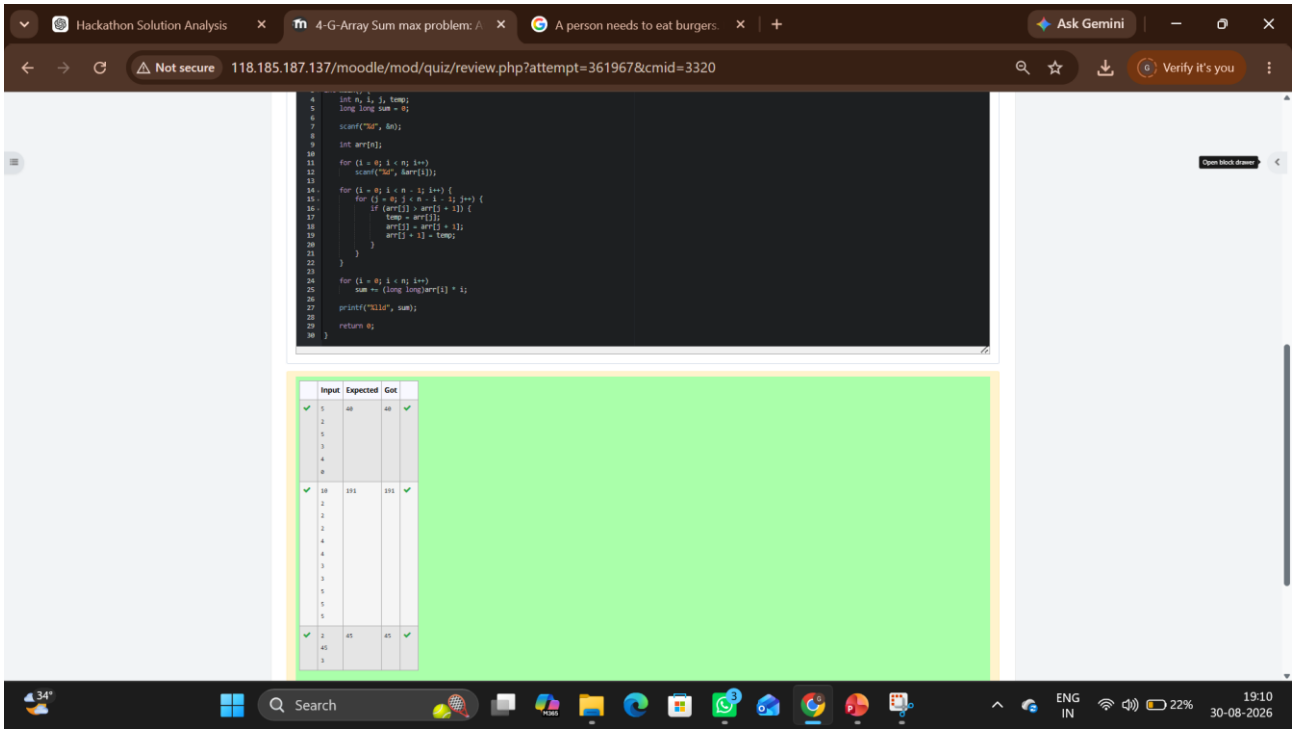
Question 4


Hackathon Solution Analysis
2-G-Cookies Problem: Attempt
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361965&cmid=3318
Verify it's you
Answer: (penalty regime: 0 %)
scanf("%d", &n);
int g[n];
for (i = 0; i < n; i++)
scanf("%d", &g[i]);
scanf("%d", &m);
int s[m];
for (i = 0; i < m; i++)
scanf("%d", &s[i]);
for (i = 0; i < n - 1; i++) {
for (j = 0; j < n - i - 1; j++) {
if (g[j] > g[j + 1]) {
temp = g[j];
g[j] = g[j + 1];
g[j + 1] = temp;
}
}
}
for (i = 0; i < m - 1; i++) {
for (j = 0; j < m - i - 1; j++) {
if (s[j] > s[j + 1]) {
temp = s[j];
s[j] = s[j + 1];
s[j + 1] = temp;
}
}
}
i = 0;
j = 0;
int count = 0;
while (i < n && j < m) {
if (s[j] >= g[i]) {
count++;
i++;
j++;
} else {
j++;
}
}
printf("%d", count);
return 0;
}
Input
Expected
Got
2
2
2
1 2
34°
Search
ENG
IN
24%
19:02
30-08-2026

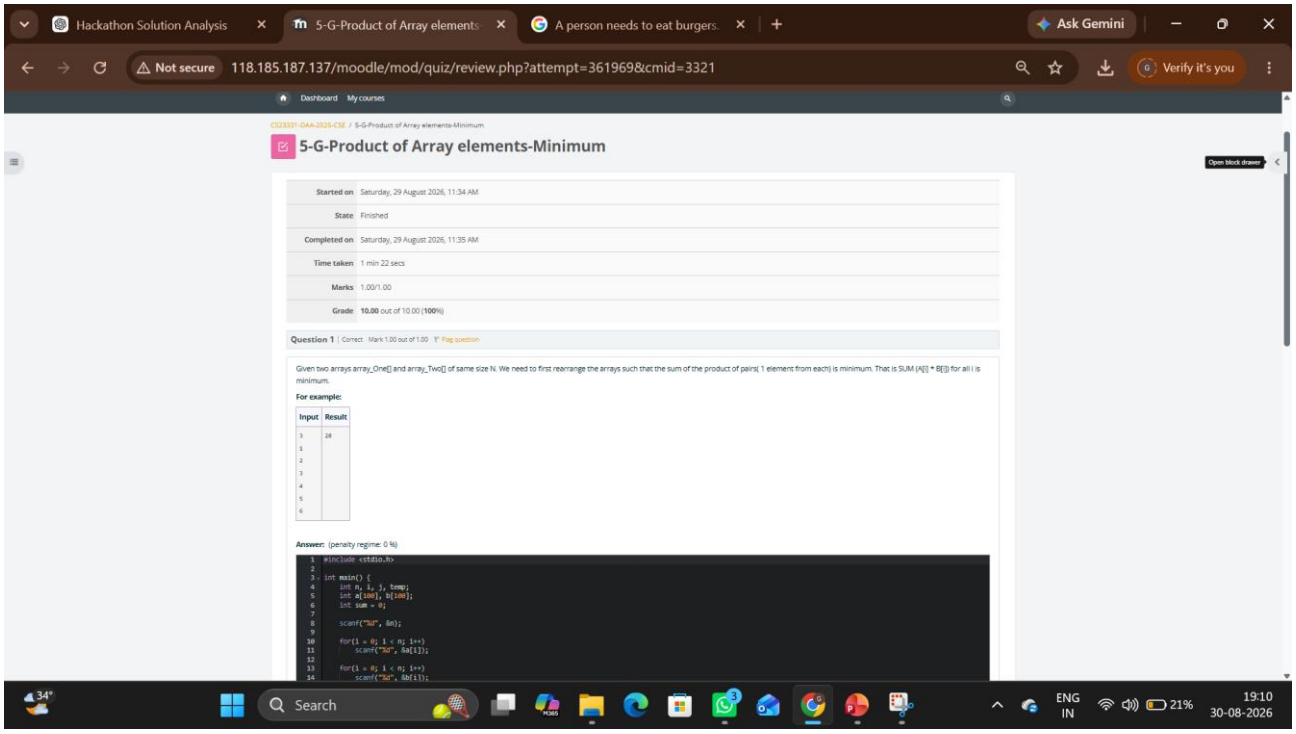
Question 5


Hackathon Solution Analysis
4-G-Array Sum max problem: A
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361967&cmid=3320
Verify it's you
CS23331-DAA-2025-CSE / 4-G-Array Sum max problem
4-G-Array Sum max problem
Started on Saturday, 29 August 2026, 11:33 AM
State Finished
Completed on Saturday, 29 August 2026, 11:34 AM
Time taken 52 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct Mark 1.00 out of 1.00 Flag question
Given an array of N integer, we have to maximize the sum of arr[i] * i, where i is the index of the element (i = 0, 1, 2, ..., N).Write an algorithm based on Greedy technique with a Complexity O(nlogn).
Input Format:
First line specifies the number of elements-n
The next n lines contain the array elements.
Output Format:
Maximum Array Sum to be printed.
Sample Input:
5
2 5 3 4 0
Sample output:
40
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int n, i, j, temp;
long long sum = 0;
scanf("%d", &n);
int arr[n];
for (i = 0; i < n; i++)
scanf("%d", &arr[i]);
34°
Search
ENG
IN
22%
19:09
30-08-2026

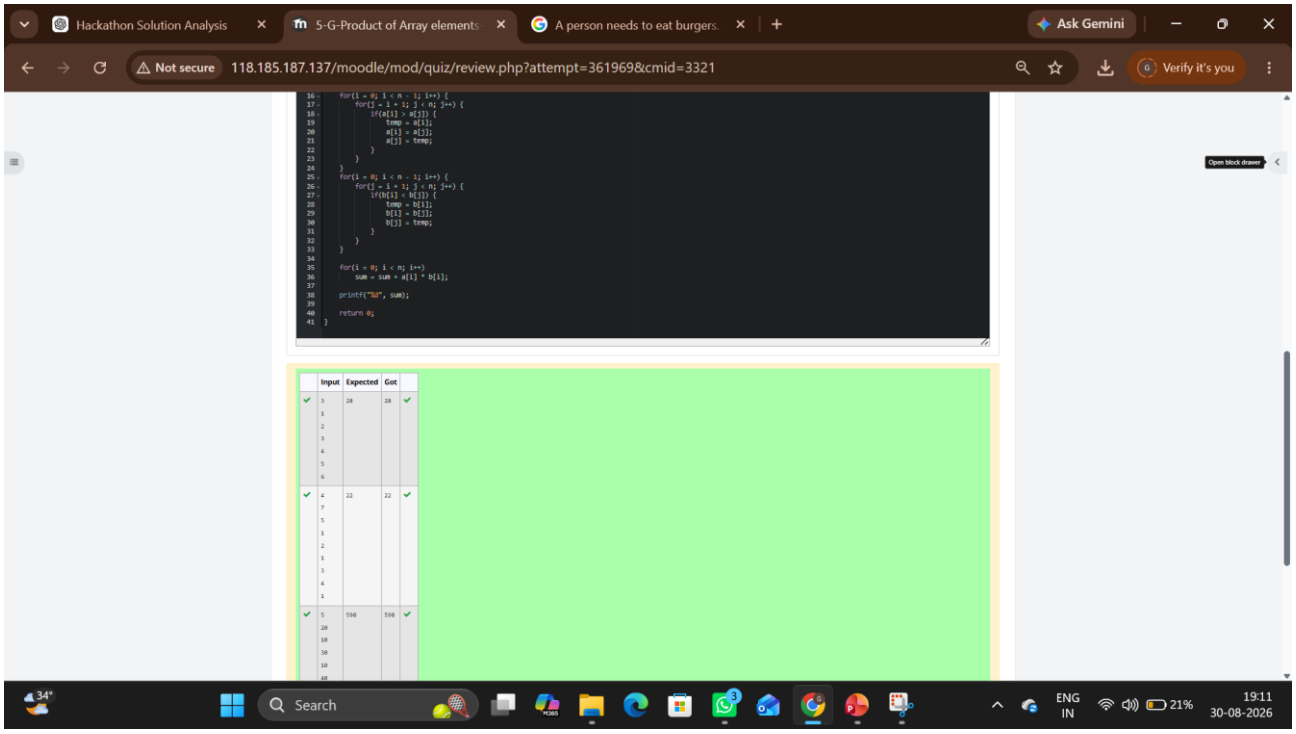
Question 6


Hackathon Solution Analysis
4-G-Array Sum max problem: A
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361967&cmid=3320
Verify it's you
Open block drawer
Input
Expected
Got
Search
ENG
IN
22%
19:10
30-08-2026

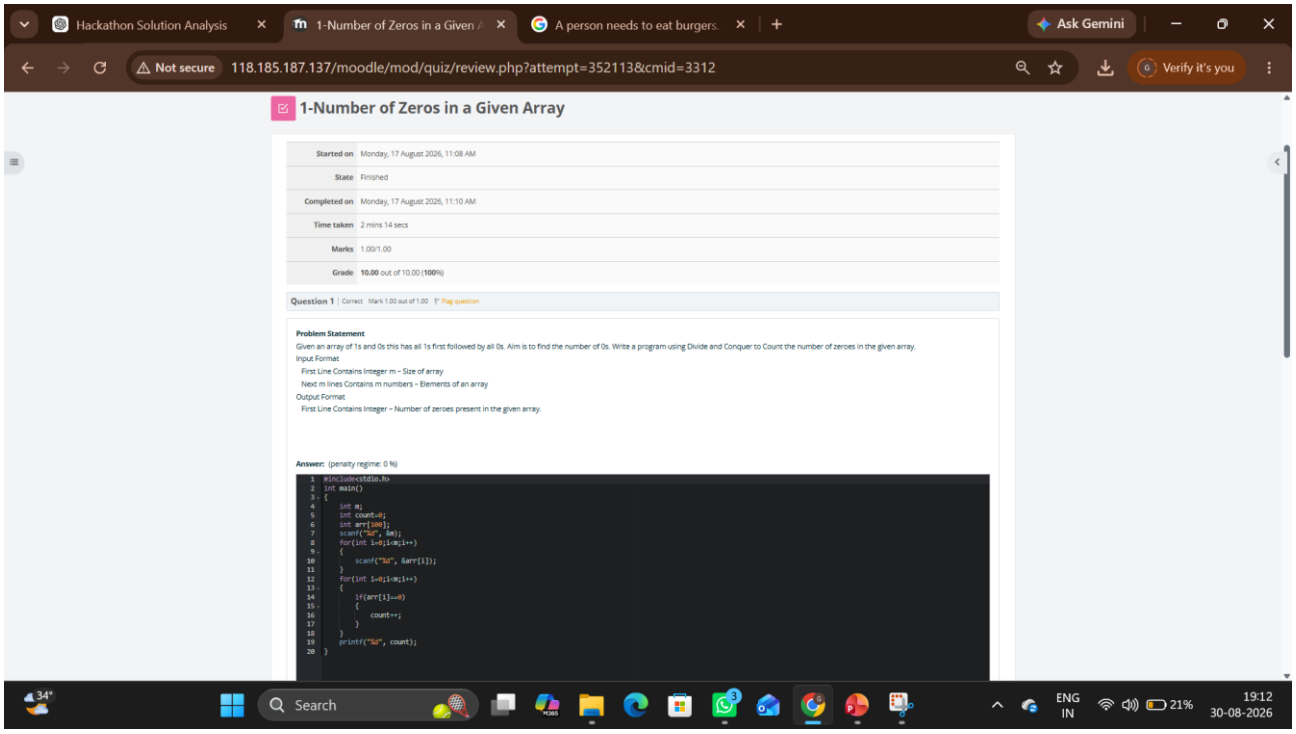
Question 7


Hackathon Solution Analysis
5-G-Product of Array elements
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361969&cmid=3321
Verify it's you
Dashboard
My courses
CS23331-DAA-2025-CSE / 5-G-Product of Array elements-Minimum
5-G-Product of Array elements-Minimum
Open block drawer
Started on Saturday, 29 August 2026, 11:34 AM
State Finished
Completed on Saturday, 29 August 2026, 11:35 AM
Time taken 1 min 22 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Given two arrays array_One[] and array_Two[] of same size N. We need to first rearrange the arrays such that the sum of the product of pairs(1 element from each) is minimum. That is SUM (A[i] * B[i]) for all i is minimum.
For example:
Input
Result
3
1 2 3
4 5 6
28
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int n, i, j, temp;
int a[100], b[100];
int sum = 0;
scanf("%d", &n);
for(i = 0; i < n; i++)
scanf("%d", &a[i]);
for(i = 0; i < n; i++)
scanf("%d", &b[i]);
34°
Search
ENG
IN
21%
19:10
30-08-2026

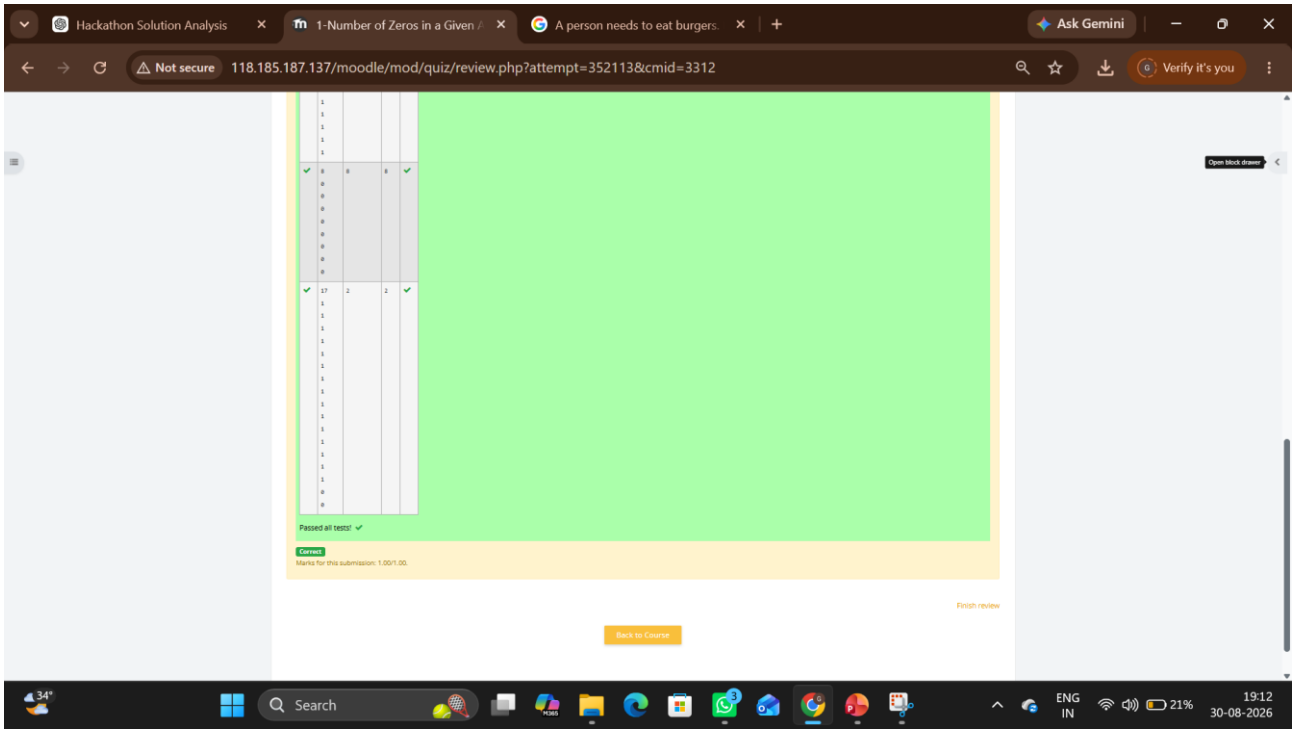
Question 8


Hackathon Solution Analysis
5-G-Product of Array elements
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361969&cmid=3321
Verify it's you
Open block drawer
Input
Expected
Got
Search
ENG
IN
21%
19:11
30-08-2026

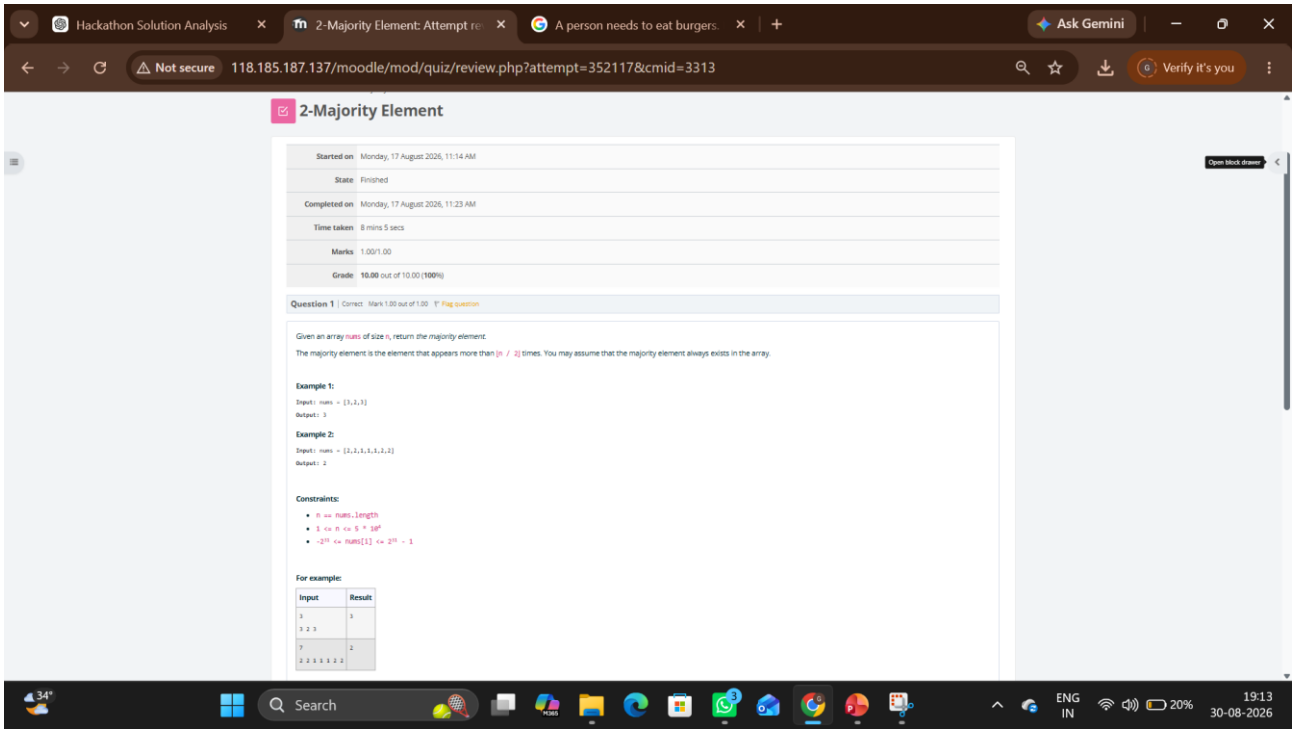
Question 9


Hackathon Solution Analysis
1-Number of Zeros in a Given A
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=352113&cmid=3312
Verify it's you
1-Number of Zeros in a Given Array
Started on Monday, 17 August 2026, 11:08 AM
State Finished
Completed on Monday, 17 August 2026, 11:10 AM
Time taken 2 mins 14 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct Mark 1.00 out of 1.00
Problem Statement
Given an array of 1s and 0s this has all 1s first followed by all 0s. Aim is to find the number of 0s. Write a program using Divide and Conquer to Count the number of zeroes in the given array.
Input Format
First Line Contains Integer m - Size of array
Next m lines Contains m numbers - Elements of an array
Output Format
First Line Contains Integer - Number of zeroes present in the given array.
Answer: (penalty regime: 0 %)
#include<stdio.h>
int main()
{
int m;
int count=0;
int arr[100];
scanf("%d", &m);
for(int i=0;i<m;i++)
{
scanf("%d", &arr[i]);
}
for(int i=0;i<m;i++)
{
if(arr[i]==0)
{
count++;
}
}
printf("%d", count);
}
34°
Search
ENG
IN
21%
19:12
30-08-2026

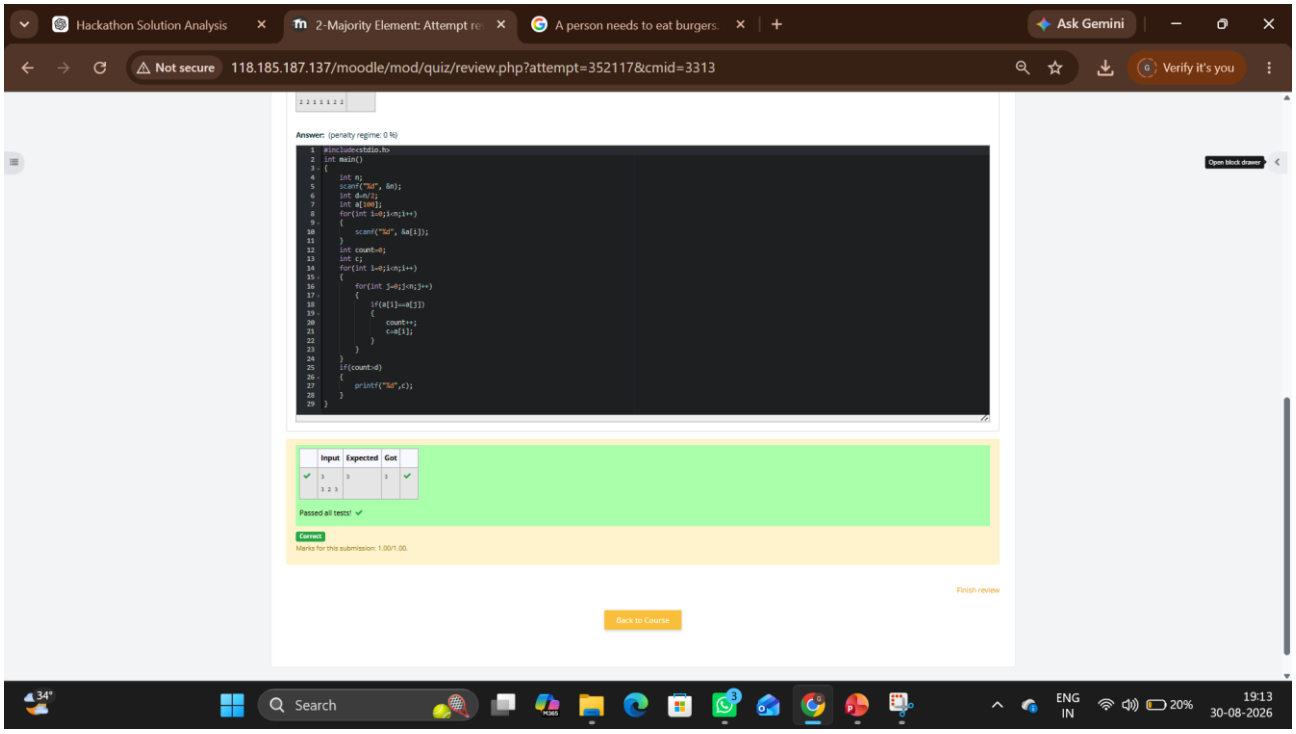
Question 10


Hackathon Solution Analysis
1-Number of Zeros in a Given
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=352113&cmid=3312
Verify it's you
Open block drawer
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
Search
ENG
IN
21%
19:12
30-08-2026

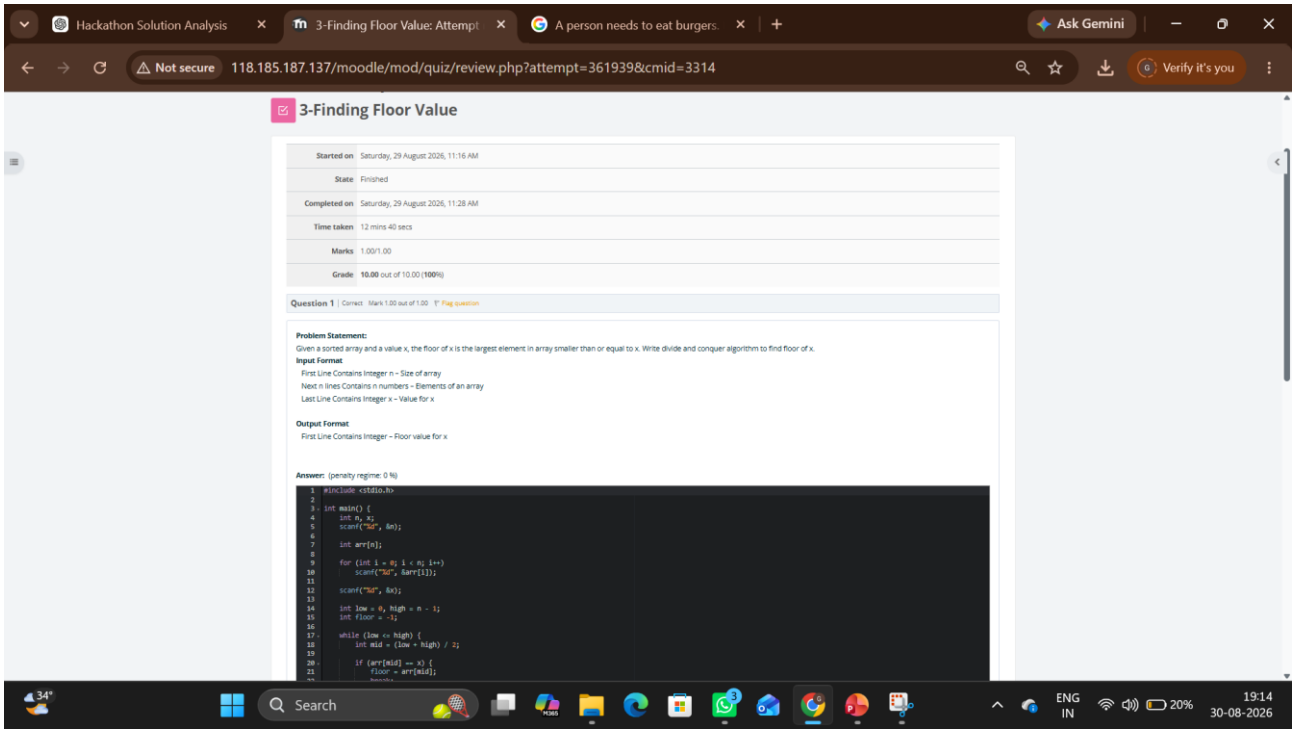
Question 11


Hackathon Solution Analysis
2-Majority Element: Attempt re
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=352117&cmid=3313
Verify it's you
2-Majority Element
Started on Monday, 17 August 2026, 11:14 AM
State Finished
Completed on Monday, 17 August 2026, 11:23 AM
Time taken 8 mins 5 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Given an array nums of size n, return the majority element.
The majority element is the element that appears more than ⌊n / 2⌋ times. You may assume that the majority element always exists in the array.
Example 1:
Input: nums = [3,2,3]
Output: 3
Example 2:
Input: nums = [2,2,1,1,1,2,2]
Output: 2
Constraints:
n == nums.length
1 <= n <= 5 * 10^4
-2^31 <= nums[i] <= 2^31 - 1
For example:
Input
Result
3
3 2 3
3
7
2 2 1 1 1 2 2
2
Open block drawer
34°
Search
ENG
IN
20%
19:13
30-08-2026

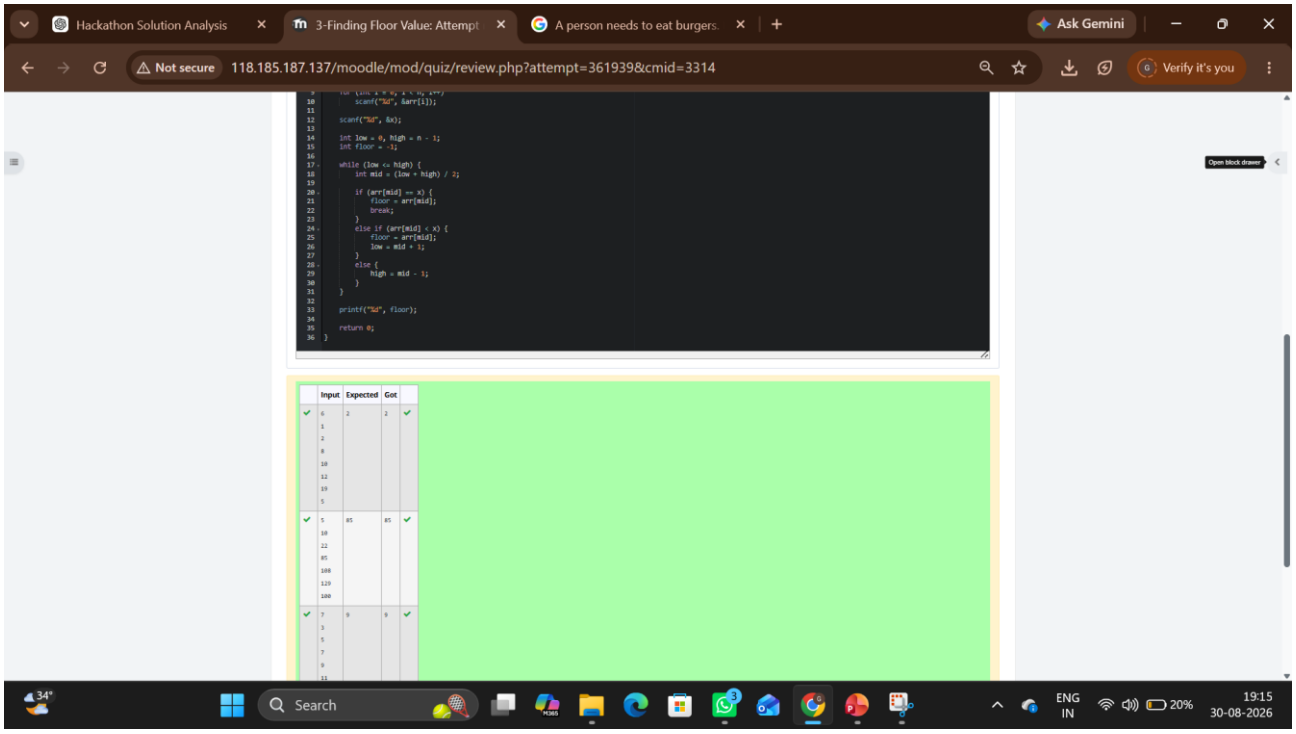
Question 12


Hackathon Solution Analysis
2-Majority Element: Attempt re
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=352117&cmid=3313
Verify it's you
Answer: (penalty regime: 0 %)
#include<stdio.h>
int main()
{
int n;
scanf("%d", &n);
int d=n/2;
int a[100];
for(int i=0;i<n;i++)
{
scanf("%d", &a[i]);
}
int count=0;
int c;
for(int i=0;i<n;i++)
{
for(int j=0;j<n;j++)
{
if(a[i]==a[j])
{
count++;
c=a[i];
}
}
}
if(count>d)
{
printf("%d",c);
}
}
Open block drawer
Input
Expected
Got
Passed all tests!
Correct
Marks for this submission: 1.00/1.00.
Finish review
Back to Course
Search
ENG
IN
20%
19:13
30-08-2026

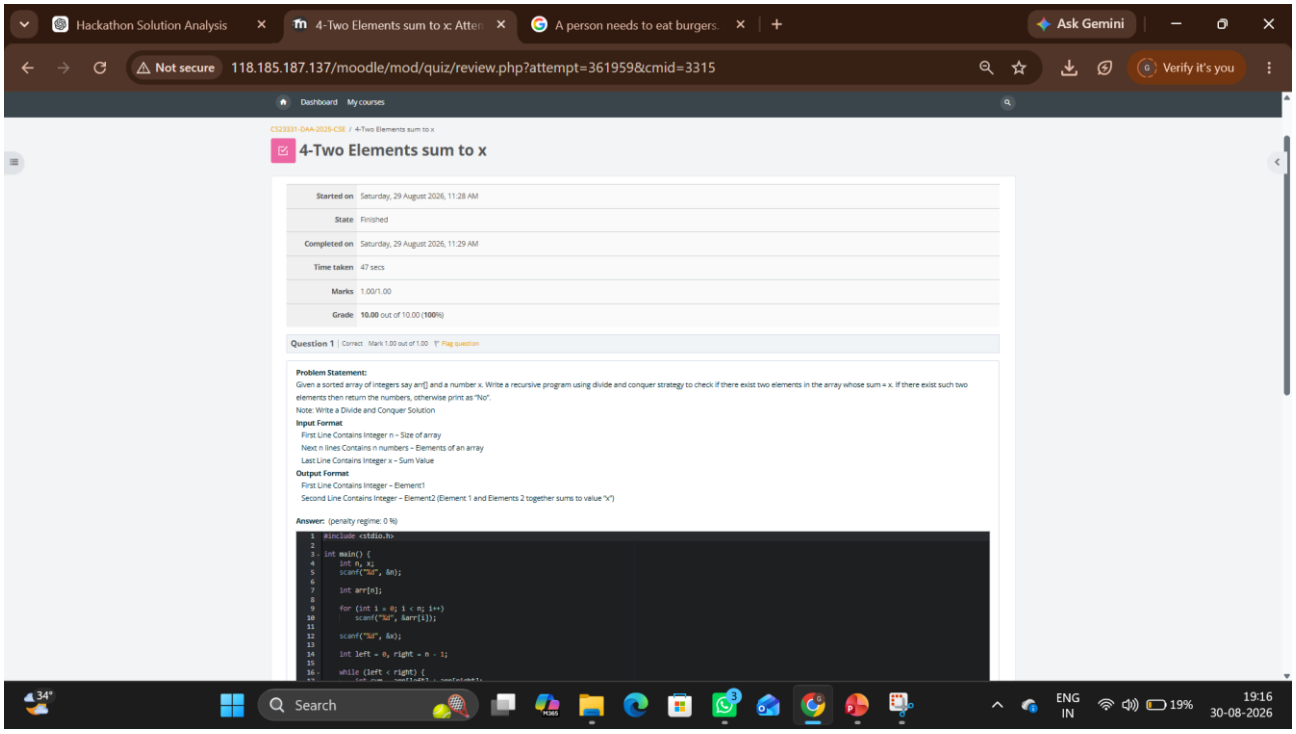
Question 13


Hackathon Solution Analysis
3-Finding Floor Value: Attempt
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361939&cmid=3314
Verify it's you
3-Finding Floor Value
Started on Saturday, 29 August 2026, 11:16 AM
State Finished
Completed on Saturday, 29 August 2026, 11:28 AM
Time taken 12 mins 40 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1 | Correct Mark 1.00 out of 1.00
Problem Statement:
Given a sorted array and a value x, the floor of x is the largest element in array smaller than or equal to x. Write divide and conquer algorithm to find floor of x.
Input Format
First Line Contains Integer n – Size of array
Next n lines Contains n numbers – Elements of an array
Last Line Contains Integer x – Value for x
Output Format
First Line Contains Integer – Floor value for x
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int n, x;
scanf("%d", &n);
int arr[n];
for (int i = 0; i < n; i++)
scanf("%d", &arr[i]);
scanf("%d", &x);
int low = 0, high = n - 1;
int floor = -1;
while (low <= high) {
int mid = (low + high) / 2;
if (arr[mid] == x) {
floor = arr[mid];
34°
Search
ENG
IN
20%
19:14
30-08-2026

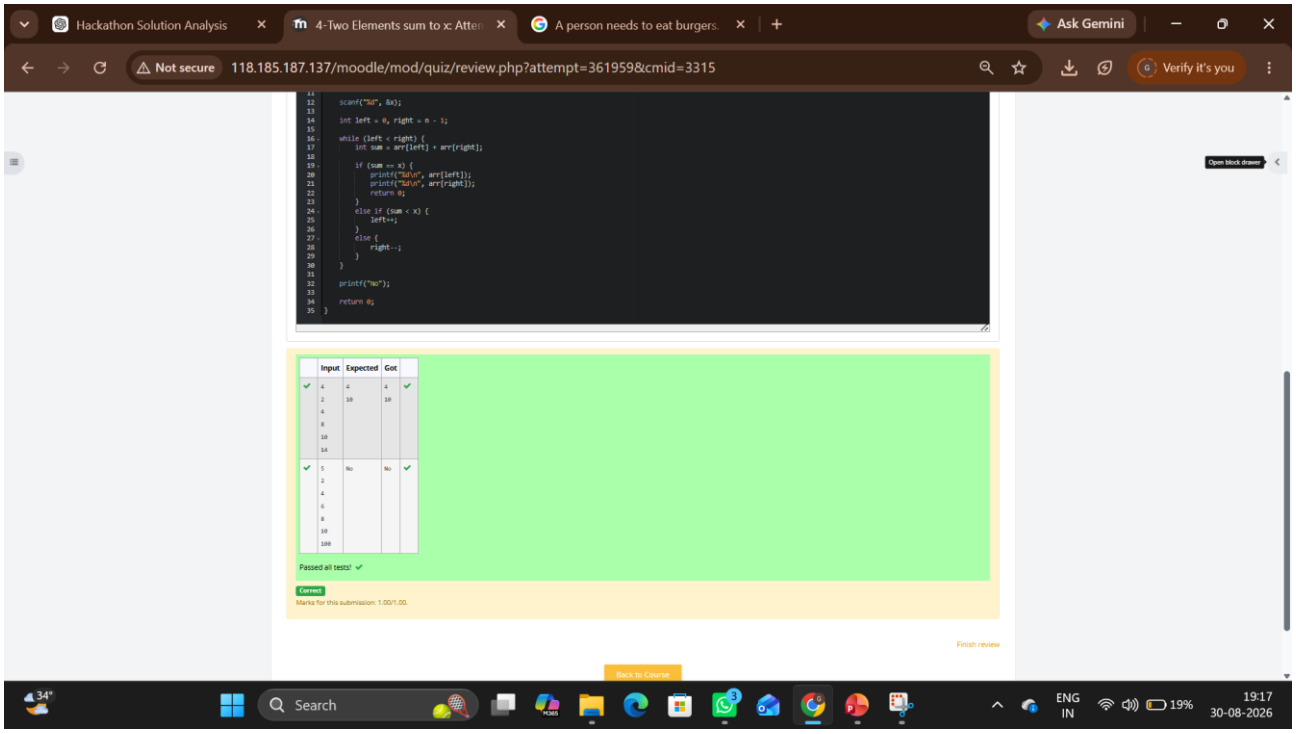
Question 14


Hackathon Solution Analysis
3-Finding Floor Value: Attempt
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361939&cmid=3314
Verify it's you
Open block drawer
Input
Expected
Got
Search
ENG
IN
20%
19:15
30-08-2026

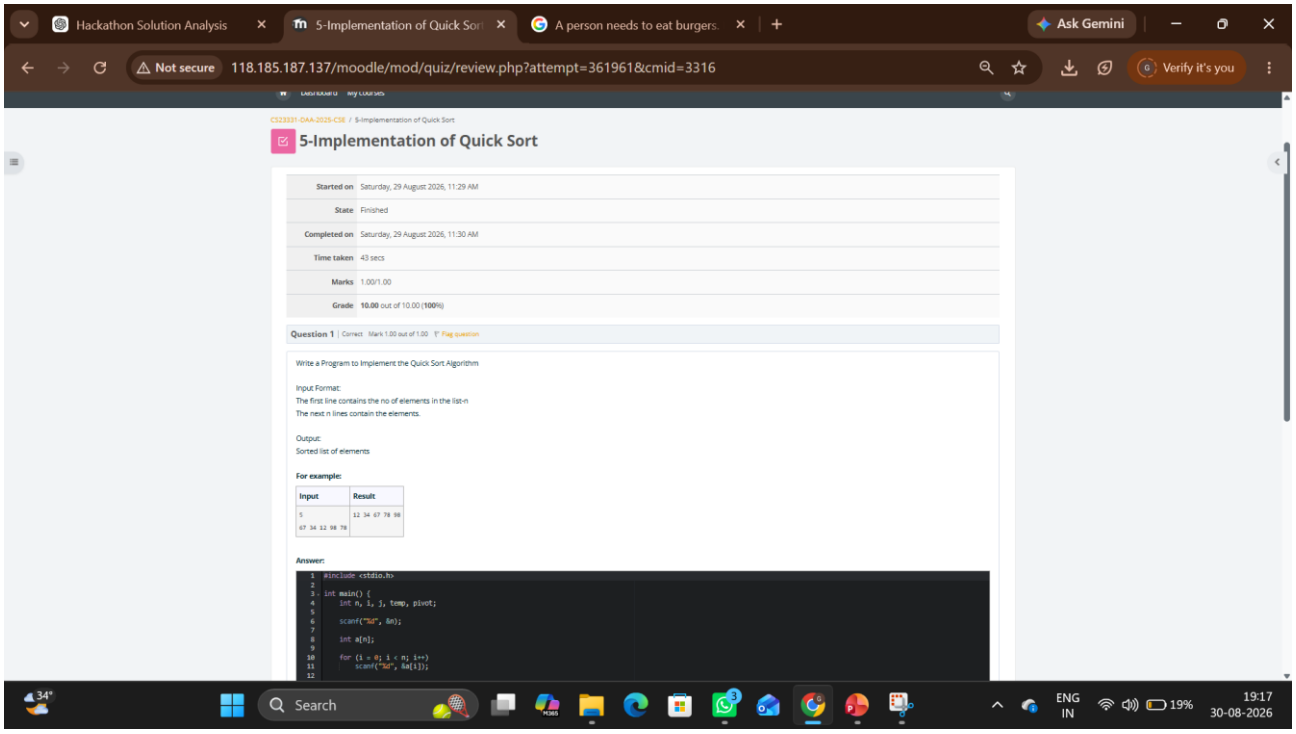
Question 15


Hackathon Solution Analysis
4-Two Elements sum to x: Atter
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361959&cmid=3315
Verify it's you
Dashboard
My courses
CS23331-OAA-2025-CSE / 4-Two Elements sum to x
4-Two Elements sum to x
Started on Saturday, 29 August 2026, 11:28 AM
State Finished
Completed on Saturday, 29 August 2026, 11:29 AM
Time taken 47 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Problem Statement:
Given a sorted array of integers say arr[] and a number x. Write a recursive program using divide and conquer strategy to check if there exist two elements in the array whose sum = x. If there exist such two elements then return the numbers, otherwise print as "No".
Note: Write a Divide and Conquer Solution
Input Format
First Line Contains Integer n – Size of array
Next n lines Contains n numbers – Elements of an array
Last Line Contains Integer x – Sum Value
Output Format
First Line Contains Integer – Element1
Second Line Contains Integer – Element2 (Element 1 and Elements 2 together sums to value "x")
Answer: (penalty regime: 0 %)
#include <stdio.h>
int main() {
int n, x;
scanf("%d", &n);
int arr[n];
for (int i = 0; i < n; i++)
scanf("%d", &arr[i]);
scanf("%d", &x);
int left = 0, right = n - 1;
while (left < right) {
34°
Search
ENG
IN
19%
19:16
30-08-2026

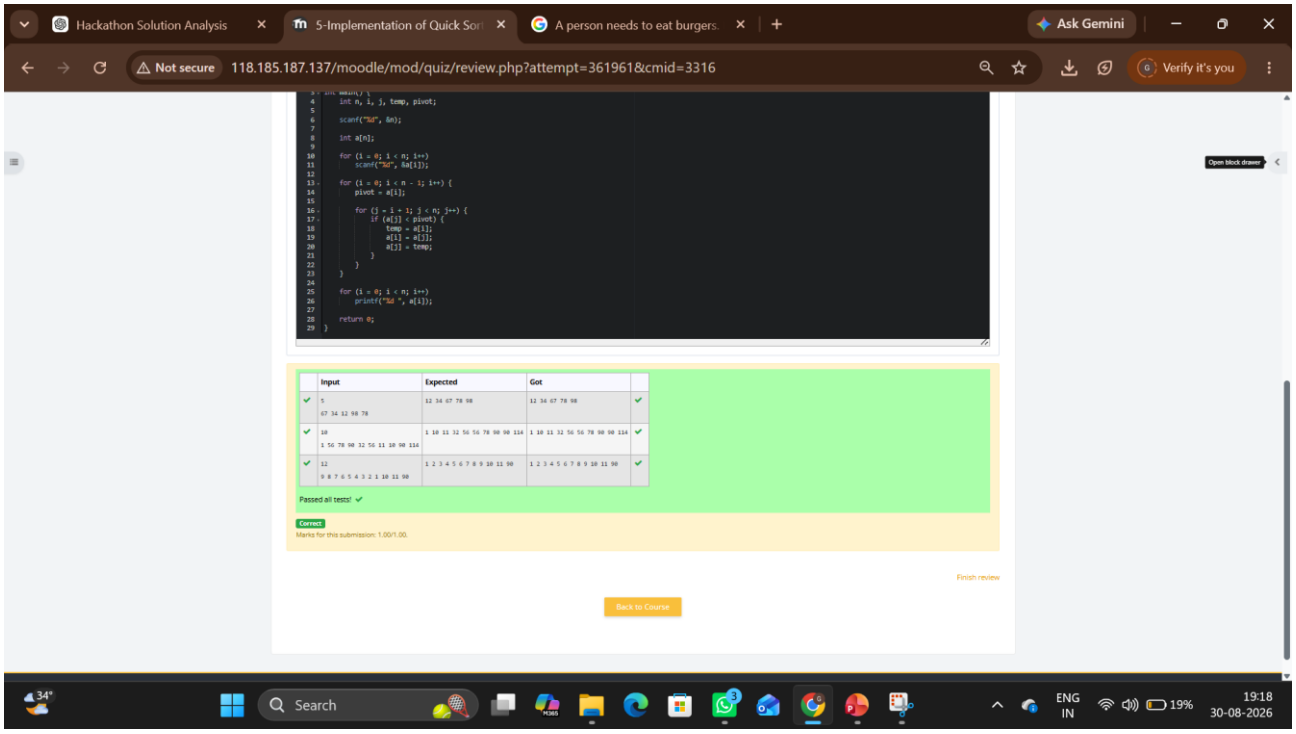
Question 16


Hackathon Solution Analysis
4-Two Elements sum to x: Atter
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361959&cmid=3315
Verify it's you
Open block drawer
Input
Expected
Got
Passed all tests!
Correct
Finish review
Back to Course
Search
ENG
IN
19%
19:17
30-08-2026

Question 17


Hackathon Solution Analysis
5-Implementation of Quick Sort
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361961&cmid=3316
Verify it's you
CS23331-DAA-2025-CSE / 5-Implementation of Quick Sort
5-Implementation of Quick Sort
Started on Saturday, 29 August 2026, 11:29 AM
State Finished
Completed on Saturday, 29 August 2026, 11:30 AM
Time taken 43 secs
Marks 1.00/1.00
Grade 10.00 out of 10.00 (100%)
Question 1
Correct
Mark 1.00 out of 1.00
Flag question
Write a Program to Implement the Quick Sort Algorithm
Input Format:
The first line contains the no of elements in the list-n
The next n lines contain the elements.
Output:
Sorted list of elements
For example:
Input
Result
5
67 34 12 98 78
12 34 67 78 98
Answer:
#include <stdio.h>
int main() {
int n, i, j, temp, pivot;
scanf("%d", &n);
int a[n];
for (i = 0; i < n; i++)
scanf("%d", &a[i]);
Search
ENG
IN
19%
19:17
30-08-2026

Question 18


Hackathon Solution Analysis
5-Implementation of Quick Sort
A person needs to eat burgers.
Ask Gemini
Not secure
118.185.187.137/moodle/mod/quiz/review.php?attempt=361961&cmid=3316
Verify it's you
Open block drawer
Input
Expected
Got
Passed all tests!
Correct
Finish review
Back to Course
Search
ENG
IN
19%
19:18
30-08-2026