

```

        color: Colors.white),
    ),
    Text(
      courentPcost.toString(),
      style: TextStyle(
        fontSize: 15,

        color: Colors.blue),
    ),
  ],
),

Column(
  crossAxisAlignment: CrossAxisAlignment.center,
  mainAxisAlignment: MainAxisAlignment.center,
  children: [
    Text(
      'Tootal Cost',
      style: TextStyle(
        fontSize: 15,

        color: Colors.white),
    ),
    Text(
      totalCost.toString(),
      style: TextStyle(
        fontSize: 15,

        color: Colors.blue),
    ),
    Text(
      'Per unit Cost',
      style: TextStyle(
        fontSize: 15,

        color: Colors.white),
    ),
    Text(
      perCost.toString(),
      style: TextStyle(
        fontSize: 15,

        color: Colors.blue),
    ),
  ],
),
],
),
),
),
),

```

```

    );
}

}

```

### Secodn part of Code :

```

class ItemHistory extends StatefulWidget {

  const ItemHistory({Key? key}) : super(key: key);

  @override
  State<ItemHistory> createState() => _ItemHistoryState();
}

class _ItemHistoryState extends State<ItemHistory> {
  String Name = "";
  bool search = false;
  TextEditingController _searchController = TextEditingController();
  // var dateFormat = new DateFormat();
  AuthClass authClass = AuthClass();
  final Stream<QuerySnapshot> _stream =
    FirebaseFirestore.instance.collection("Iusers").doc(FirebaseAuth.instance.currentUser!.uid)
      .collection("Item").snapshots();

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      drawer: NavigationDrawer(),
      backgroundColor: Colors.black87,
      appBar: AppBar(

        backgroundColor:Color(0xff252041),
        title:

        Row(
          mainAxisAlignment: MainAxisAlignment.spaceBetween,
          children: [
            search?itemName(): Row(
              children: [

                Text("Items"),
              ],
            ),
            IconButton(onPressed: (){
              setState(() {
                search=!search;
              });
            }, icon:
            Icon(search?CupertinoIcons.xmark_circle:Icons.search),color:
            Colors.white,iconSize:search?22:28),

```

```

    ],
  ),

  ),
  body: StreamBuilder(
    stream: _stream,
    builder: (BuildContext context, AsyncSnapshot snapshot) {
      if (!snapshot.hasData) {
        return Center(child: CircularProgressIndicator());
      }
      if (snapshot.connectionState==ConnectionState.waiting) {
        return Center(child: CircularProgressIndicator());
      }

      return ListView.builder(
        itemCount: snapshot.data.docs.length,
        itemBuilder: (context,index){

          Map<String,dynamic> document =snapshot.data.docs[index].data() as
Map<String,dynamic>
          ;

          if(Name.isEmpty){
            return InkWell(
              onTap: (){
                Navigator.push(context, MaterialPageRoute(builder:
(builder)=>UpdateItem(
                  document: document,
                  id:snapshot.data.docs[index].id,
                )));
              },
              child: ItemCard(
                QTY: document["itemQty"]==null?0:document["itemQty"],
                totalCost:
document["itemTotalCost"]==null?0:document["itemTotalCost"],
                courentPcost:document["itemCostPer"]==null?0:document["itemCostPer"]
                ,
                itemName:document["itemName"]==null?"No Data":document["itemName"] ,
                nickName: document["itemNickName"]==null?"No
Data":document["itemNickName"] ,
                perCost: document["itemTotalCost"]/document["itemQty"],
              ),
            );
          }
          if(document["itemName"].toString().startsWith(Name.toLowerCase()) ||
document["itemNickName"].toString().startsWith(Name.toLowerCase())){
            return InkWell(
              onTap: (){
                Navigator.push(context, MaterialPageRoute(builder:
(builder)=>UpdateItem(

```

```

        document: document,
        id: snapshot.data.docs[index].id,
    ));
    },
    child: ItemCard(
      QTY: document["itemQty"]==null?0:document["itemQty"],
      totalCost:
document["itemTotalCost"]==null?0:document["itemTotalCost"],
      courentPcost:document["itemCostPer"]==null?0:document["itemCostPer"]
    ,
      itemName:document["itemName"]==null?"No Data":document["itemName"] ,
      nickName: document["itemNickName"]==null?"No
Data":document["itemNickName"] ,
      perCost: document["itemTotalCost"]/document["itemQty"],
    ),
  );
}

    return Container();

  }
  );
}),
);
}
Widget itemName() {
  return Container(
    height: 45,
    width: 223,
    decoration: BoxDecoration(
      color: Color(0xff2a2e3d), borderRadius: BorderRadius.circular(15)),
    child: Row(

      children: [

        SizedBox(width: 10,),
        Icon(Icons.search,color: Colors.white,size:25),
        SizedBox(width: 15),
        Expanded(child: Container(

          decoration: BoxDecoration(
            color: Color(0xff2a2e3d), borderRadius: BorderRadius.circular(15)),
          child: TextFormField(
            onChanged: (value){
              setState(() {
                Name = value;
              });
            },
          ),
        ),
        controller: _searchController ,
        style: TextStyle(color: Colors.grey, fontSize: 17),
        decoration: InputDecoration(
          border: InputBorder.none,
          hintText: "Search for Item" ,

```

```

hintStyle: TextStyle(color: Colors.grey, fontSize: 17),
contentPadding: EdgeInsets.only(


    right: 20,

),
),
),
),)
],
),
);
}
}

```

#### 4.4 Search Button:

User can easily find the IMS app Items on search title to access need data.

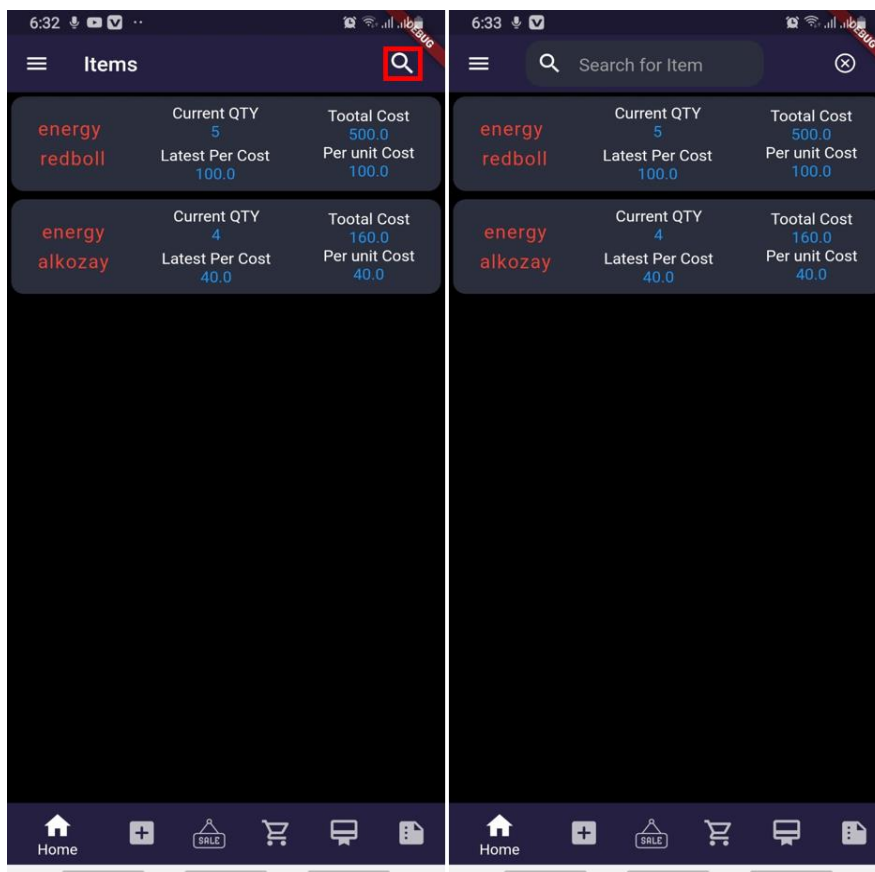

#### 4.4 Search Button Design Code Flutter UI

These Code flutter UI Search Button and all Application Items Search and Find your Search title in the application it's so easy to find the title.

```

Widget itemName() {
  return Container(
    height: 45,

```

```

        width: 223,
        decoration: BoxDecoration(
          color: Color(0xff2a2e3d), borderRadius:
BorderRadius.circular(15)),
        child: Row(

children: [

        SizedBox(width: 10,),
        Icon(Icons.search,color: Colors.white,size:25),
        SizedBox(width: 15),
          Expanded(child: Container(

        decoration: BoxDecoration(
          color: Color(0xff2a2e3d), borderRadius:
BorderRadius.circular(15)),
        child: TextFormField(
          onChanged: (value){
            setState(() {
              Name = value;
            });
          },

        controller: _searchController ,
        style: TextStyle(color: Colors.grey, fontSize: 17),
        decoration: InputDecoration(
          border: InputBorder.none,
          hintText: "Search for Item" ,
          hintStyle: TextStyle(color: Colors.grey, fontSize: 17),
          contentPadding: EdgeInsets.only(



            right: 20,

          ),
        ),
      ),
    ),
  ),
),
],
),
);
}
}

```

## 4.5 Drawer Menu

Drawer menu consist of a listView and inide that buildHeader and a container and inside of container there is buildMenuItems and a divider.

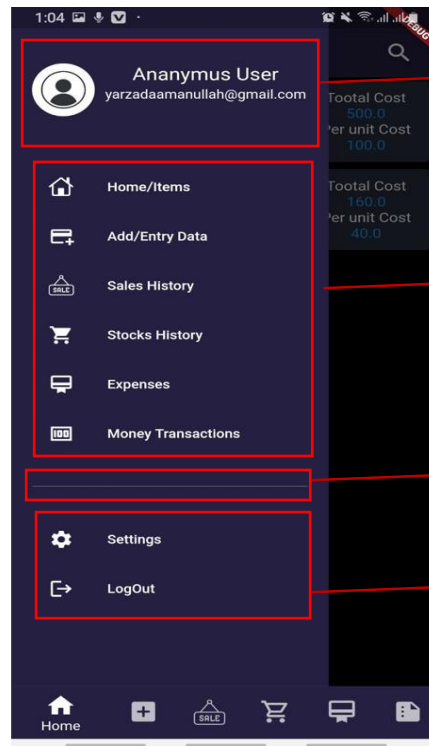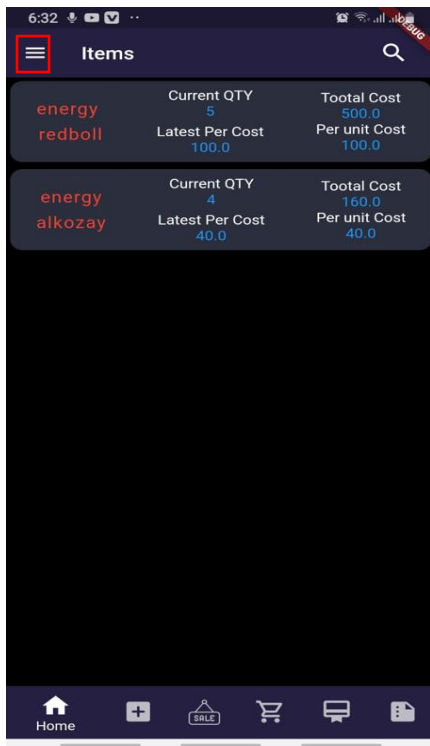

buildHeader

buildMenuItem

divider

buildMenuItem

## 4.5 Drawer Menu Design Code Flutter UI.

Drawer menu Coding consist a ListView and a buildHeader and inside that we Have User Name and Email or Phone number and after that inside the Container we have our page rout to eaisily swith between pages and after that we have the divider and after that there is setting and LogOuut option.

```
class NavigationDrawer extends StatelessWidget {
  AuthClass authClass = AuthClass();
  final Padding = EdgeInsets.symmetric(horizontal: 20);

  final userEmail=FirebaseAuth.instance.currentUser!.email();
  String? phone=FirebaseAuth.instance.currentUser!.phoneNumber;
  final image ="assets/avatar.jpg";

  @override
  Widget build(BuildContext context) {

    return Drawer(
      child: Material(

        color: Color(0xff252041),
        child: ListView(

          children: <Widget>[
            buildHeader(
              image: image,
              name: "Ananymus User",
              email: userEmail==null?phone:userEmail,
            ),
          ],
        ),
      ),
    );
  }
}
```

```

        Container(
          padding: Padding,
          child: Column(

            children: [
              const SizedBox(height: 12),
              buildMenuItem(text: "Home/Items",icon:
CupertinoIcons.home,onCliccked: ()=>selectedItem(context,5)),
              buildMenuItem(text: "Add/Entry Data",icon:
Icons.add_card_outlined,onCliccked: ()=>selectedItem(context,0)),
              buildMenuItem(text: "Sales History",icon:
MyFlutterApp.logo,onCliccked: ()=>selectedItem(context,1)),
              buildMenuItem(text: "Stocks History",icon:
Icons.shopping_cart,onCliccked: ()=>selectedItem(context,2)),
              buildMenuItem(text: "Expenses",icon:
Icons.wallet_membership,onCliccked: ()=>selectedItem(context,3)),
              buildMenuItem(text: "Money Transactions",icon:
Icons.money,onCliccked: ()=>selectedItem(context,4)),
              const SizedBox(height: 24,),
              Divider(color: Colors.white70,),
              const SizedBox(height: 24,),
              buildMenuItem(text: "Settings",icon: Icons.settings),
              buildMenuItem(text: "LogOut",icon:
Icons.logout,onCliccked: ()=>selectedItem(context,6)),
            ],
          ),
        ),
      ),
    ],
  ),
);
}

Widget buildMenuItem({
  required String text,
  required IconData icon,
  VoidCallback?onCliccked
}){
  final color = Colors.white;
  return ListTile(
    leading: Icon(icon,color: color,),
    title: Text(text,style: TextStyle(color: color)),
    onTap: onCliccked ,
    // hoverColor: hoverColor ,

  );
}

void selectedItem(BuildContext context, int index)async{
  Navigator.of(context).pop();
  switch(index){
    case 0:
      Navigator.of(context).push(MaterialPageRoute(builder:
(context)=>AddItemStocksSales(),
  ));
    break;

```

```

        case 1:
Navigator.of(context).push(MaterialPageRoute(builder: (context)=>Transation(),
));
        break;
        case 2:
Navigator.of(context).push(MaterialPageRoute(builder:
(context)=>Transation2(),
));
        break;
        case 3:
Navigator.of(context).push(MaterialPageRoute(builder:
(context)=>ExpensesswipView(),
));
        break;
        case 4:
Navigator.of(context).push(MaterialPageRoute(builder: (context)=>overView(),
));
        break;
        case 5:
Navigator.of(context).push(MaterialPageRoute(builder: (context)=>HomePage2(),
));
        break;
        case 6:
await authClass.logout();

Navigator.pushAndRemoveUntil(context, MaterialPageRoute(builder:
(builder)=>SignUpPsge()), (route) => false);
        break;
    }
}

Widget buildHeader({

    required String name,
    required String image,
    required String? email,

})=>Container(
padding: Padding.add(EdgeInsets.symmetric(vertical: 40)),
child: Row(
    crossAxisAlignment: CrossAxisAlignment.start,
    children: [
        CircleAvatar(radius: 30, backgroundImage: AssetImage(image)),
        SizedBox(width: 10),
        Column(
            children: [
                Text(name, style: TextStyle(fontSize: 20, color: Colors.white),),
                const SizedBox(height: 4),
                Text(email!, style: TextStyle(fontSize: 14, color: Colors.white),),
            ],
        ),
    ],
),
],

```

```

    },
);

}

```


## 4.6 IMS Main Sections

The Inventory Management application main section is two parts the first part is BottomNavigationBar that we can Switch between main parts of our application.

**LIKE :** we can swith between Home page , Adding data , Sales history , stocks History , expenses History and transaction history .

and the second part is consist of a tabBarView that each section has their own tabBarView.

**LIKE :** for example we have Entry of Items , Sales , Stocks and expenses in Adding data Section.

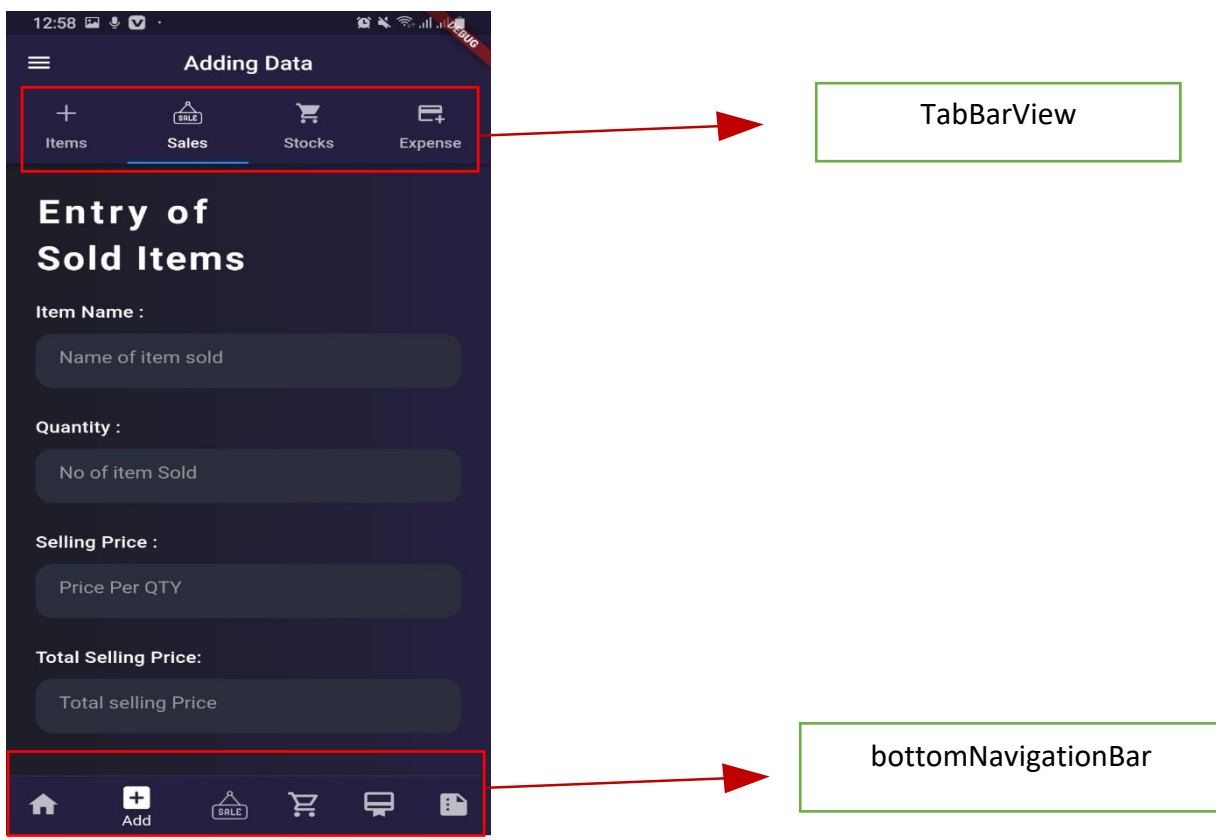

## 4.6 IMS Main Sections Design Code Flutter UI

As we mention before IMS Main sections is two parts in here we have only UI Codes of flutter of each Part .

### TabbarView

Its just sample of adding section tabBarView and as we mention bfore each section has there own tabBarView .

```
class _AddItemStocksSalesState extends State<AddItemStocksSales> {
  @override
  Widget build(BuildContext context) {
    return DefaultTabController(

      length: 4,
      child: Scaffold(
        drawer: NavigationDrawer(),

        appBar: AppBar( backgroundColor:Color(0xff252041),

          title:

            Text("Adding Data"),

          centerTitle: true,
          bottom: TabBar(tabs: [
            Tab(text: 'Items',icon: Icon(CupertinoIcons.add)),),
            Tab(text: 'Sales',icon: Icon(MyFlutterApp.logo)),
            Tab(text: 'Stocks',icon: Icon(Icons.shopping_cart)),
            Tab(text: 'Expense',icon: Icon(Icons.add_card)),

          ]),
      ),
      body: TabBarView(children: [
        AddItem(),
        AddSales(),
        AddStocks(),
        AddExpenses(),

      ]),
    );
  }
}
```

### botomNavigationBar

```
class HomePage2 extends StatefulWidget {
  const HomePage2({Key? key}) : super(key: key);

  @override
  State<HomePage2> createState() => _HomePage2State();
}
```

```

class _HomePage2State extends State<HomePage2> {
  int cIndex = 0 ;
  final screens =[
    ItemHistory(),
    AddItemStocksSales(),
    Transation(),
    Transation2(),
    ExpensesswipView(),
    overView(),

];

@override
Widget build(BuildContext context) {
  return Scaffold(
    backgroundColor: Colors.black87,

    body:screens[cIndex],
    bottomNavigationBar: BottomNavigationBar(
      backgroundColor:Color(0xff252041),
      selectedItemColor: Colors.white,
      unselectedItemColor: Colors.white70,
      iconSize: 30,
      currentIndex: cIndex,
      onTap: (index)=>setState(()=>cIndex=index),

      items:
    [
      BottomNavigationBarItem(icon: Icon(Icons.home),
        label: "Home",
        backgroundColor:Color(0xff252041)),
      BottomNavigationBarItem(icon: Icon(Icons.add_box_rounded),
        label: "Add",
        backgroundColor:Color(0xff252041) ),
      BottomNavigationBarItem(icon: Icon(MyFlutterApp.logo),
        label: "Sales",
        backgroundColor:Color(0xff252041)),
      BottomNavigationBarItem(icon: Icon(Icons.shopping_cart_outlined),
        label: "Stocks",
        backgroundColor:Color(0xff252041)),
      BottomNavigationBarItem(icon: Icon(Icons.wallet_membership),
        label: "Expenses",
        backgroundColor:Color(0xff252041)),
      BottomNavigationBarItem(icon: Icon(Icons.summarize),
        label: "OverView",
        backgroundColor:Color(0xff252041)),


    ]),
  );}
}

```

## 4.7 IMS Data Entry

IMS Application has four types data entries :

**1\_Item Entry , 2\_Sales Entry , 3\_Stocks Entry , 4\_Expenses Entry .**

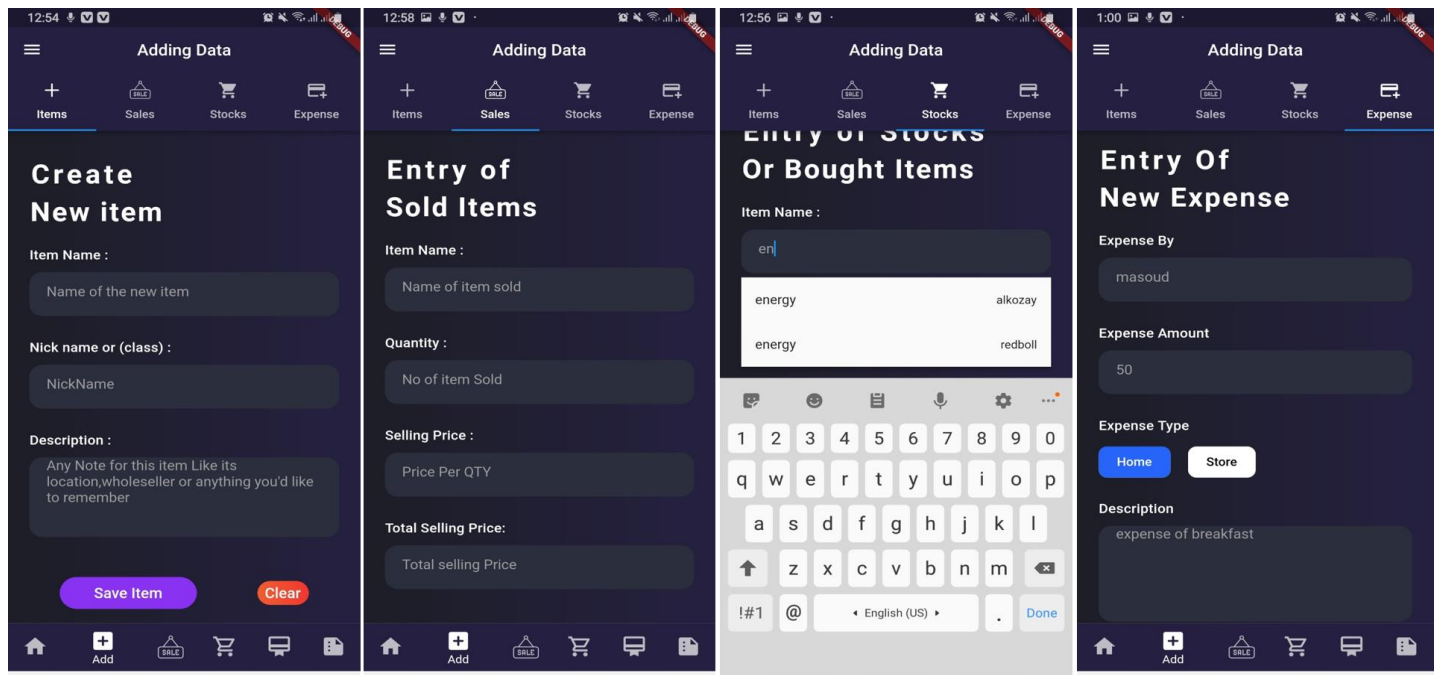

## 4.7 IMS Data Entry Screens Design Code Flutter UI.

The IMS application Data Entry code UI design in Flutter and Link to the Database Firebase Firestore.

The Codes for **Item Entry** and **Expenses Entry** Are almost Similar so as a sample we use just itme entry Codes,

```
class _AddItemState extends State<AddItem> {
  final formkey=GlobalKey<FormState>();

  TextEditingController _addItemNameControler = TextEditingController();
  TextEditingController _addItemNickNameControler = TextEditingController();
  TextEditingController _addItemdescriptionControler = TextEditingController();
  bool duplicat = true;
  bool duplicat2 = false;

  String itemN = '';
  String itemNickN = '';
  String label2 = '';
  bool docID = false;
  bool circular = false;
  AuthClass authclass = AuthClass();
  Color bgColor = Colors.black;

  @override
  Widget build(BuildContext context) {
```

```
return Scaffold(
```

### Container use Case :

Inside The Scaffold we use the Container as the Main body of our items Screen.

And inside of container we use a Column to Form our Labels , textFields ,texts and Buttons.

```
body: Container(
  height: MediaQuery.of(context).size.height,
  width: MediaQuery.of(context).size.width,
  decoration: BoxDecoration(
    gradient:
      LinearGradient(colors: [Color(0xff1d1e26), Color(0xff252041)])),
  child: SingleChildScrollView(
    child: Column(
      crossAxisAlignment: CrossAxisAlignment.start,
      children: [
        SizedBox(
          height: 30,
        ),
        Padding(
          padding: const EdgeInsets.symmetric(horizontal: 25, vertical: 5),
          child: Form(
            key: formkey,
            autovalidateMode: AutovalidateMode.onUserInteraction,
            child: Column(
              crossAxisAlignment: CrossAxisAlignment.start,
              children: [
                Text(
                  "Create",
                  style: TextStyle(
                    fontSize: 33,
                    color: Colors.white,
                    fontWeight: FontWeight.bold,
                    letterSpacing: 4,
                  ),
                ),
                SizedBox(
                  height: 8,
                ),
                Text(
                  "New item",
                  style: TextStyle(
                    fontSize: 33,
                    color: Colors.white,
                    fontWeight: FontWeight.bold,
                    letterSpacing: 2,
                  ),
                ),
                SizedBox(
                  height: 25,
                ),
                label("Item Name :"),

```

```

        SizedBox(
          height: 12,
        ),
        itemName(),
        SizedBox(
          height: 30,
        ),
        label("Nick name or (class) :"),
        SizedBox(
          height: 12,
        ),
        nickName(),
        SizedBox(
          height: 30,
        ),
        label("Description :"),
        SizedBox(
          height: 12,
        ),
        description(),
        SizedBox(
          height: 50,
        ),
        Row(
          mainAxisAlignment: MainAxisAlignment.spaceAround,
          children: [
            buttonSave(),
            buttonDelete()
          ],
        ),
        SizedBox(
          height: 30,
        ),
      ),
    ],
  ),
);

```

### Column use Case In this part of Code ;

As you see in codes we used some Labels , textfields and Buttons that we made them as self made Widgets in the bottom of the class and we used them inside the Column with some SizedBoxes to style our item entry Form.

```

    ],
  ),
),
),
],
),
),
),
),
);
}
Widget itemName() {
  return Container(
    height: 55,
    width: MediaQuery.of(context).size.width,
    decoration: BoxDecoration(

```