


Dependencies

- psychopg2 [<http://initd.org/psychopg/>]

To install it run pip using the file `requirements_extras.txt`.

Configuration

This plugin can be set from Faraday's Plugin Configuration Dialog, selecting the *Metasploit Online Service Plugin* item and setting MSF's postgresql server and credentials.

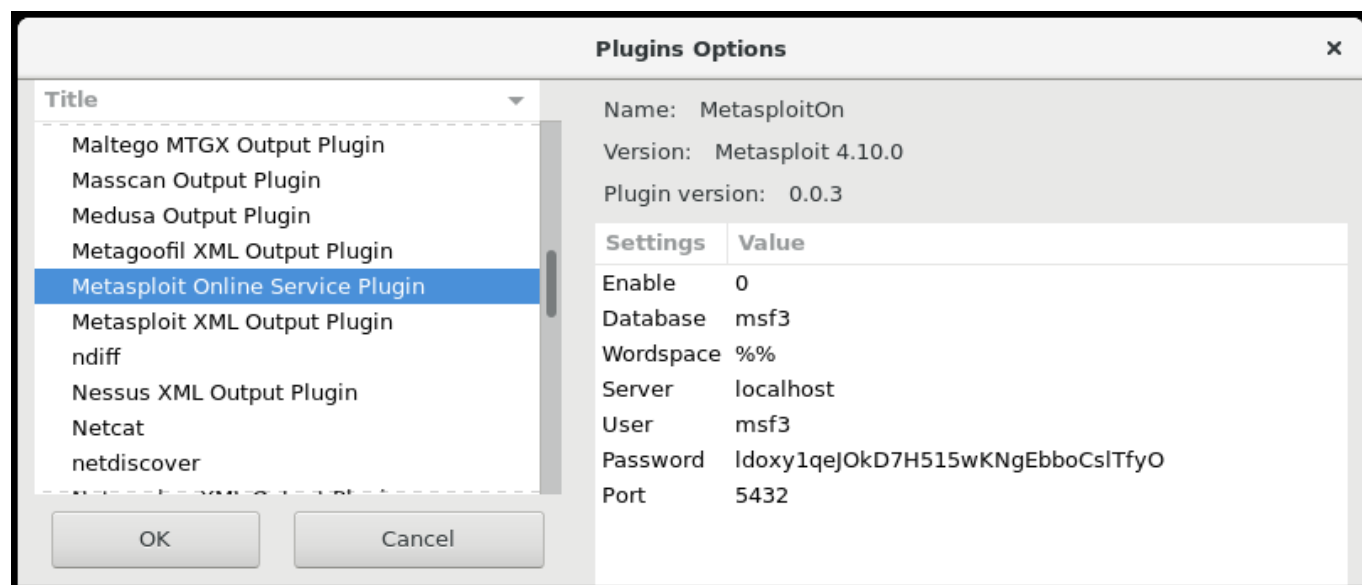

This plugin is disabled by default. To enable it, change the boolean `Enabled` to 1.

The information required for connecting to Metasploit is generated dynamically and stored in `/opt/metasploit/apps/pro/ui/config/database.yml`.