


This plugin can be set from Faraday's Plugin Configuration, where the information of the BeEF's server and RESTful AuthKey:

[AuthKey]

[Host]

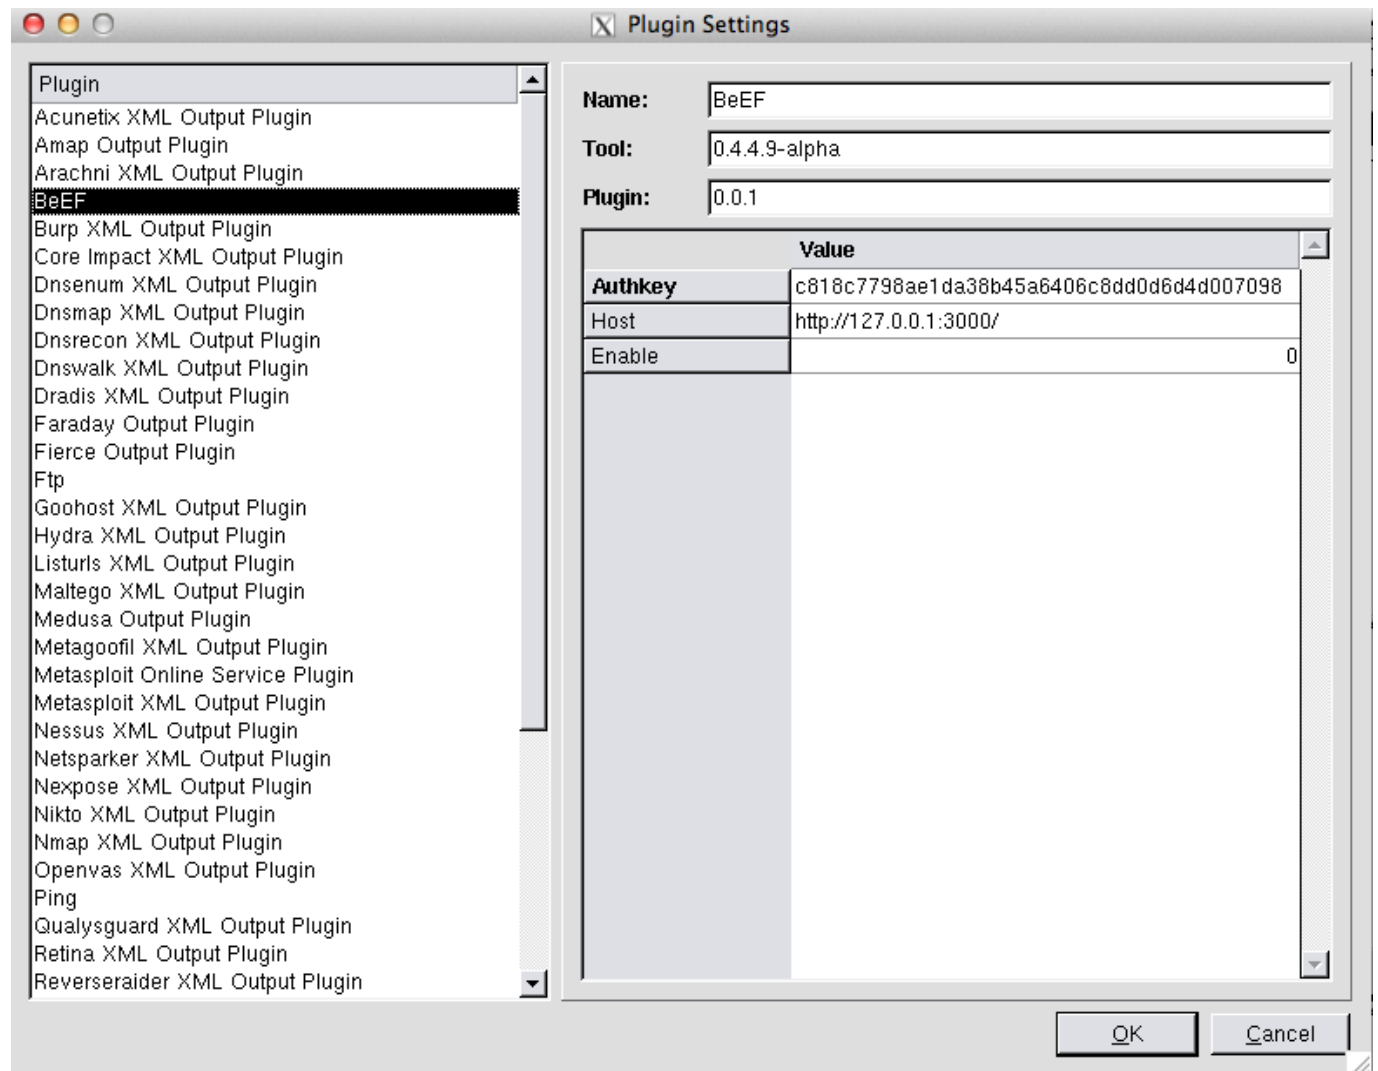

By default this plugin is disabled, change the enable boolean in order to use it

The information required for connecting to BeEF is generated when you start it:

```
root@isrlabs-kali: /usr/share/beef-xss# ./beef
[21:03:58][*] Bind socket [imapeudoral] listening on [0.0.0.0:2000].
[21:03:58][*] Browser Exploitation Framework (BeEF) 0.4.4.5-alpha
[21:03:58] |   Twit: @beefproject
[21:03:58] |   Site: http://beefproject.com
[21:03:58] |   Blog: http://blog.beefproject.com
[21:03:58] |_ Wiki: https://github.com/beefproject/beef/wiki
[21:03:58][*] Project Creator: Wade Alcorn (@WadeAlcorn)
[21:03:59][*] BeEF is loading. Wait a few seconds...
[21:03:59][*] 10 extensions enabled.
[21:03:59][*] 171 modules enabled.
[21:03:59][*] 2 network interfaces were detected.
[21:03:59][+] running on network interface: 127.0.0.1
[21:03:59] |   Hook URL: http://127.0.0.1:3000/hook.js
[21:03:59] |_ UI URL: http://127.0.0.1:3000/ui/panel
[21:03:59][+] running on network interface: 192.168.1.37
[21:03:59] |   Hook URL: http://192.168.1.37:3000/hook.js
[21:03:59] |_ UI URL: http://192.168.1.37:3000/ui/panel
[21:03:59][*] RESTful API key: 95e7923020559726d0b43deb1fc78c7dad09b7f5f
[21:03:59][*] HTTP Proxy: http://127.0.0.1:6789
[21:03:59][*] BeEF server started (press control+c to stop)
```