



Ariadne

3D Dungeon Maker

Upgrade Guide

© Explorers' Lab

Ver 1.5.0

Overview3

Upgrade Utility.....4

Update map data manually6

About Resources folder9

Updating EventMasterData.....10

Chapter 1

Overview

This document explains upgrading Ariadne from version 1.0.x to version 1.5.0.

Ariadne has been changed substantially in version 1.5.0.

Systems for processing events are changed especially, so it is recommended to review those changes in a new project before updating the existing project.

See also the **"ReleaseNote"** file in the **"Documents"** folder.


Chapter 2

Upgrade Utility


Ariadne has an upgrade utility tool from 1.0.x to 1.5.0.

If you upgrade Ariadne in the existing project, execute this upgrade utility tool.


You can open the window of upgrade utility tool from **[Window] -> [Ariadne] -> [Upgrade Utility]** in the menu bar.

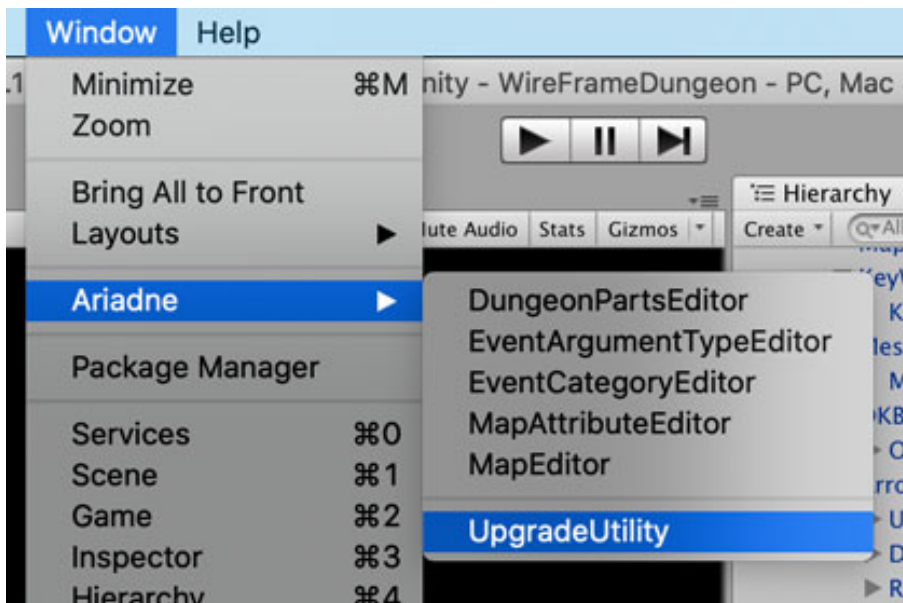

Click **[Upgrade]** button to execute upgrade processes.

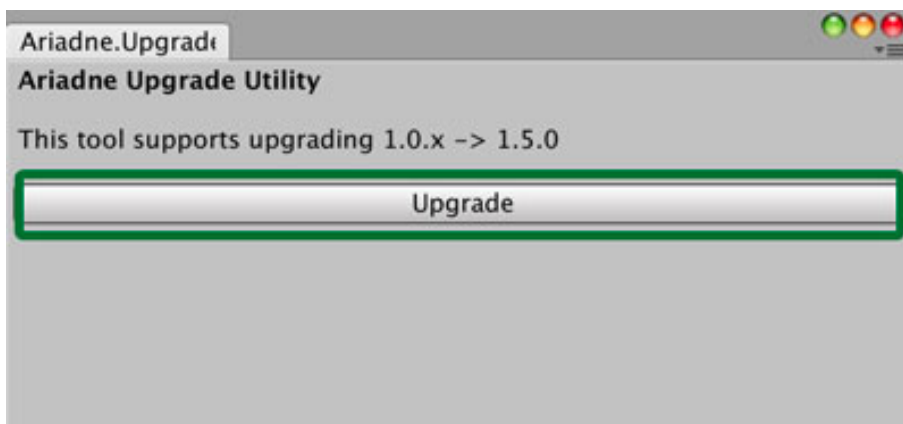

This tool shows **"Done!"** text on the window when upgrade processes have been finished.

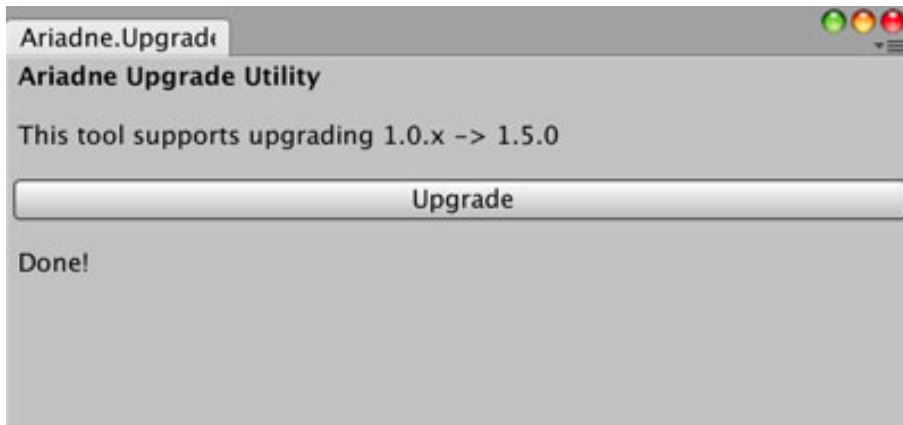

In this tool, Ariadne moves deprecated scripts to **[Ariadne/Scripts/_Deprecated]** folder.

And Ariadne sets references for the following data at FloorMapMasterData used in the Demo scene.

- **MapAttributeData**
- **DungeonPartsData**
- **DungeonBasePartsData**

Chapter 3


Update map data manually

Ariadne updates FloorMapMasterData used in the Demo scene automatically, but you have to update your FloorMapMasterData manually.

Set references to the following files on the MapEditor.


- **MapAttributeData**
- **DungeonPartsData**
- **DungeonBasePartsData**

You can set some references about MapAttributeData and DungeonBasePartsData. It is recommended to set the Ariadne system data and your data in these lists.

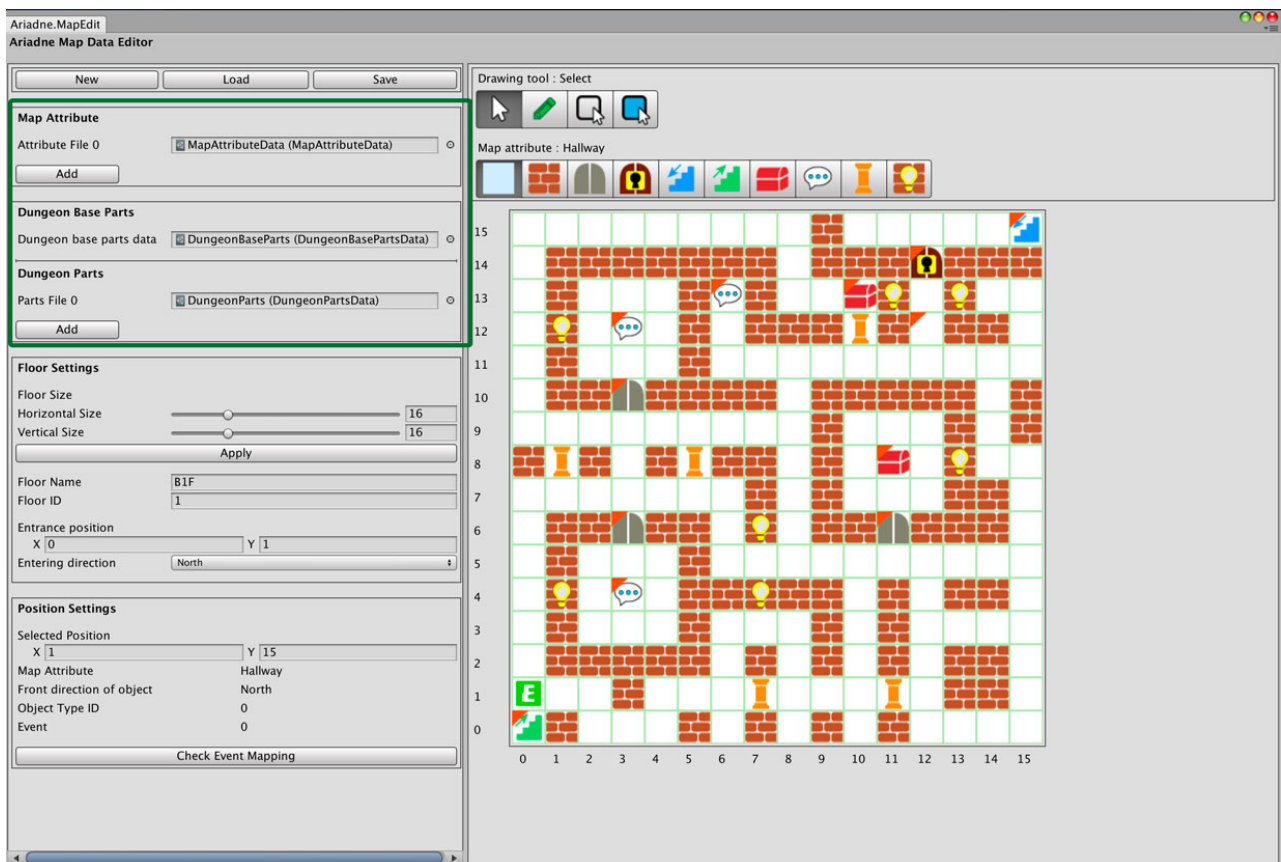


Ariadne defined map attributes in the **“MapAttributeDefine”** script in the previous version. The default map attributes in this file are moved MapAttributeData file.

If you defined map attributes in this script, add your attributes to your MapAttributeData. You can create MapAttributeData from **[Create] -> [Ariadne] -> [MapAttributeData]** in the context menu.

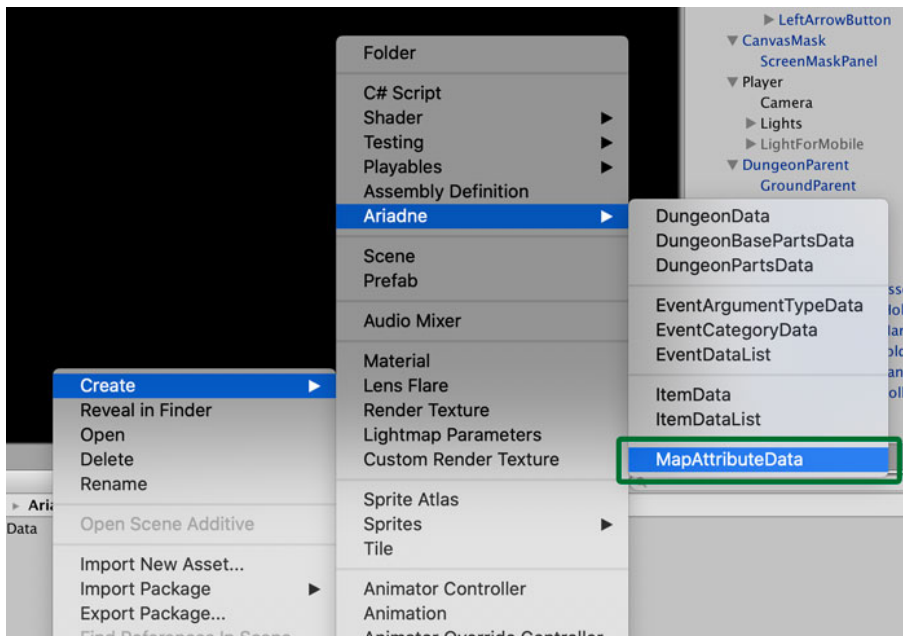


You can open MapAttributeEditor from **[Window] -> [Ariadne] -> [MapAttributeEditor]** in the menu bar.

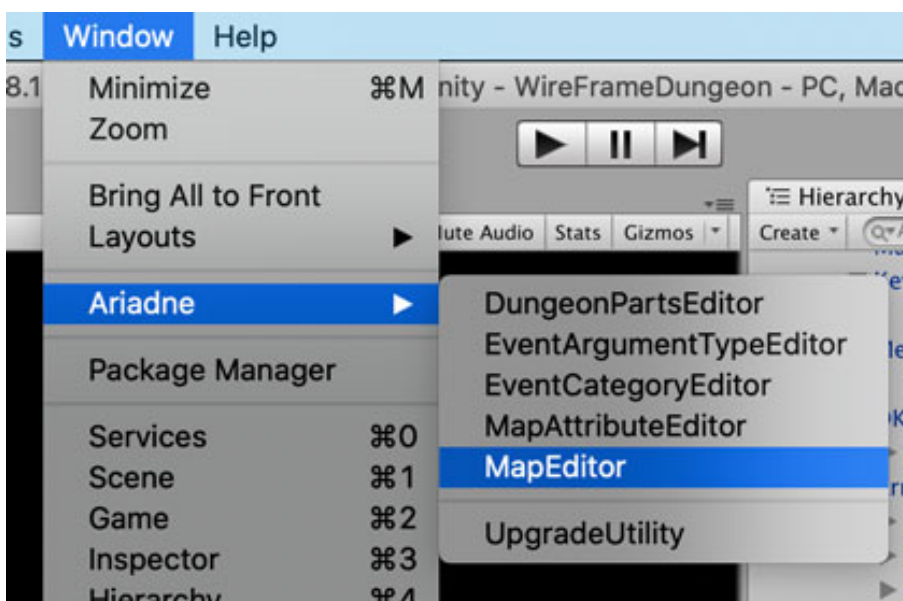

If you added map attributes, it is recommended to add new dungeon parts corresponding to these map attributes. You can add dungeon parts setting in the DungeonPartsData file.


You can create DungeonPartsData from **[Create] -> [Ariadne] -> [DungeonPartsData]** in the context menu.

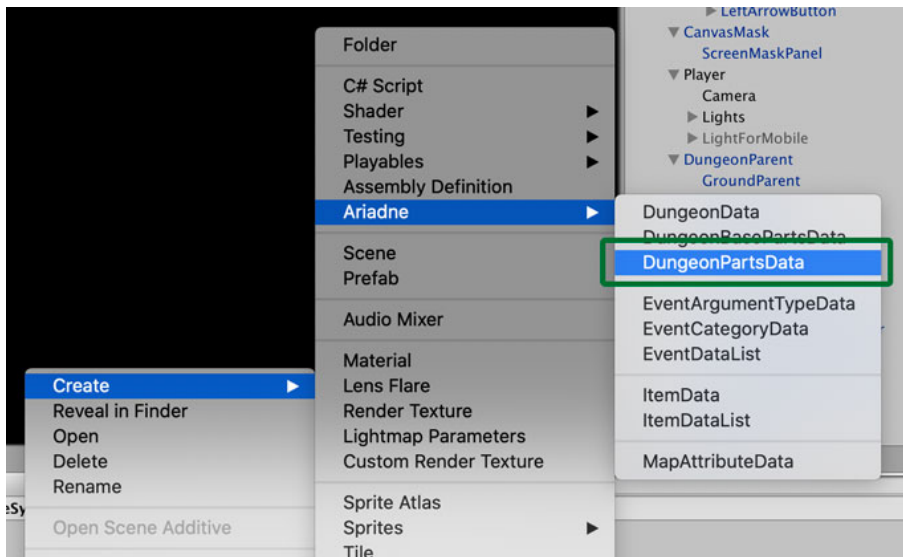

To edit DungeonPartsData, use DungeonPartsEditor. You can open DungeonPartsEditor from **[Window] -> [Ariadne] -> [DungeonPartsEditor]** in the menu bar.

If you use your dungeon parts, it is also recommended to add DungeonBasePartsData.

Ariadne doesn't have the editor for DungeonBasePartsData, so edit this data at the Inspector window. Set the size reference parts, outside wall parts, ground parts, and ceiling parts.

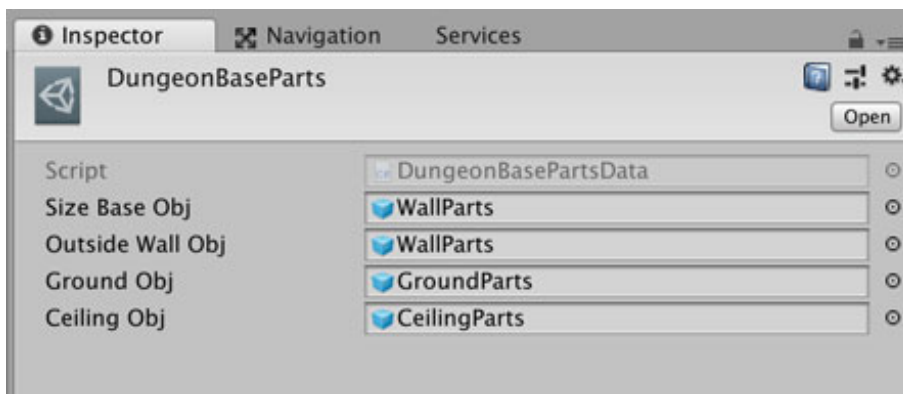

Chapter 4

About Resources folder


Ariadne used **"Resources"** folder in the previous version. But the newer version of Ariadne doesn't use this folder to consider the performance.

If you update Ariadne in the existing project, files in **"Resources"** folder are left.

Ariadne doesn't use Resources.Load() method, but use the data to hold system data (such as event data) as a list.

Ariadne uses this list of data for the following data:

- **EventManagerData**
- **ItemMasterData**

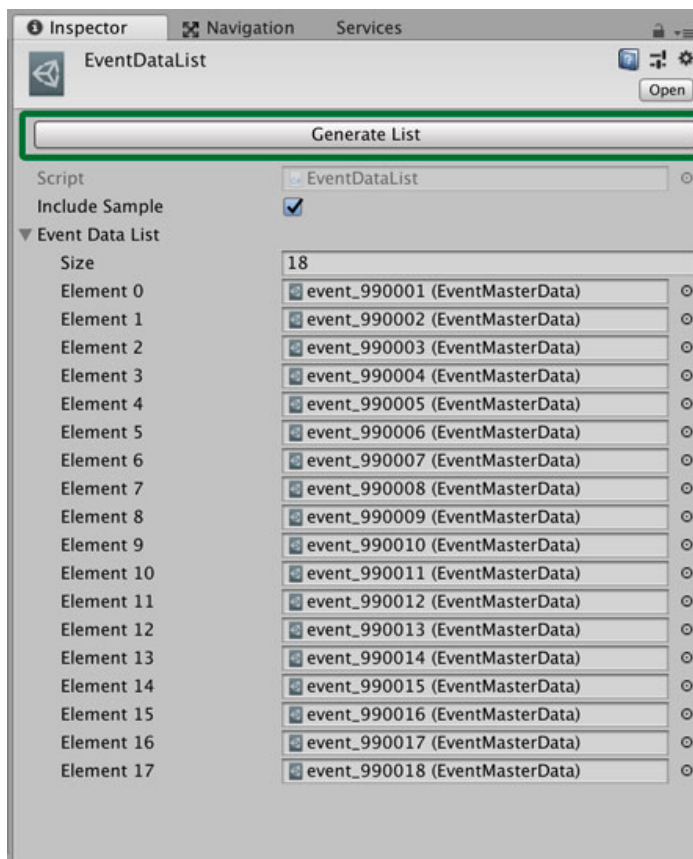

Ariadne places these list data in **[Ariadne/Data/DataList]** folder.

In the Inspector window, these list data show **[Generate List]** button. To click this button, Ariadne sets references for data in the project automatically.

MapEditor uses this list data to refer to event data, so set your event data to this list before use MapEditor.

EventDataList has an option to exclude demo event data. If you don't want to include demo data, check this option and click **[Generate List]** button.

Chapter 5

Updating EventMasterData

The system for process events is changed in Ariadne version 1.5.0.

EventProcessor can process events sequentially. You can set multiple category events in an EventParts. These processes are called EventProcess.

EventMasterData keeps fields for the previous version, so move these values to the new EventProcess.

You can not see these fields in EventEditor, but you can see them in the Inspector window.

The following table shows relations of events between version 1.0.x and 1.5.0.

No.	Event in 1.0.x	Event in 1.5.0
1	None	Use "None" in the new event category.
2	Door	Combine the following new event categories. - PlayAnimation - Wait - MovePlayerToFront
3	LockedDoor	This event uses the same categories to "Door" above. In addition, this event has the condition whether the player has a key item or not.
4	MovePosition	Use "MovePosition" in the new event category.
5	Treasure	Combine the following new event categories. - PlayAnimation - Wait - IncreaseItem(Or IncreaseMoney) - ShowMessages If the player opened the treasure box, this event plays an open animation when the player enters the floor.
6	Messenger	Use "ShowMessages" in the new event category.
7	ExitPosition	Use "ExitDungeon" in the new event category.

