

Bootstrap Assignment:

1.

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet"
  integrity="sha384-
T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min
.js"
  integrity="sha384-
C6RzsynM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/o0jlpcV8Qyq46cDfL"
  crossorigin="anonymous"></script>
  <title>Question 1</title>
</head>

<body>
  <div class="container mt-4" style="margin-left: 75px;">
    <h3>Excelr Courses</h3>
    <div class="row">
      <div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
        <div class="card">
          
          <div class="card-body">
            <h6 class="card-title">Java Full Stack</h6>
            <p class="card-text">Description for Java</p>
          </div>
          <div class="card-body">
            <a href="#" class="btn btn-primary">Enroll Now</a>
          </div>
        </div>
      </div>
      <div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
        <div class="card">
          
          <div class="card-body">
            <h6 class="card-title">Angular</h6>
```

```

        <p class="card-text">Description for Angular</p>
    </div>
    <div class="card-body">
        <a href="#" class="btn btn-primary">Enroll Now</a>
    </div>
</div>
</div>
<div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
    <div class="card">
        
        <div class="card-body">
            <h6 class="card-title">Spring Boot</h6>
            <p class="card-text">Description for Spring Boot</p>
        </div>
        <div class="card-body">
            <a href="#" class="btn btn-primary">Enroll Now</a>
        </div>
    </div>
</div>
<div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
    <div class="card">
        
        <div class="card-body">
            <h6 class="card-title">JavaScript</h6>
            <p class="card-text">Description for JavaScript</p>
        </div>
        <div class="card-body">
            <a href="#" class="btn btn-primary">Enroll Now</a>
        </div>
    </div>
</div>
<div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
    <div class="card">
        
        <div class="card-body">
            <h6 class="card-title">SQL</h6>
            <p class="card-text">Description for SQL</p>
        </div>
        <div class="card-body">
            <a href="#" class="btn btn-primary">Enroll Now</a>
        </div>
    </div>
</div>
<div class="col-md-6 col-lg-4 mb-4" style="width: 300px;">
    <div class="card">



```

```

        
        <div class="card-body">
            <h6 class="card-title">Bootstrap</h6>
            <p class="card-text">Description for Bootstrap</p>
        </div>
        <div class="card-body">
            <a href="#" class="btn btn-primary">Enroll Now</a>
        </div>
    </div>
</div>
</div>
</body>
</html>

```

Output:

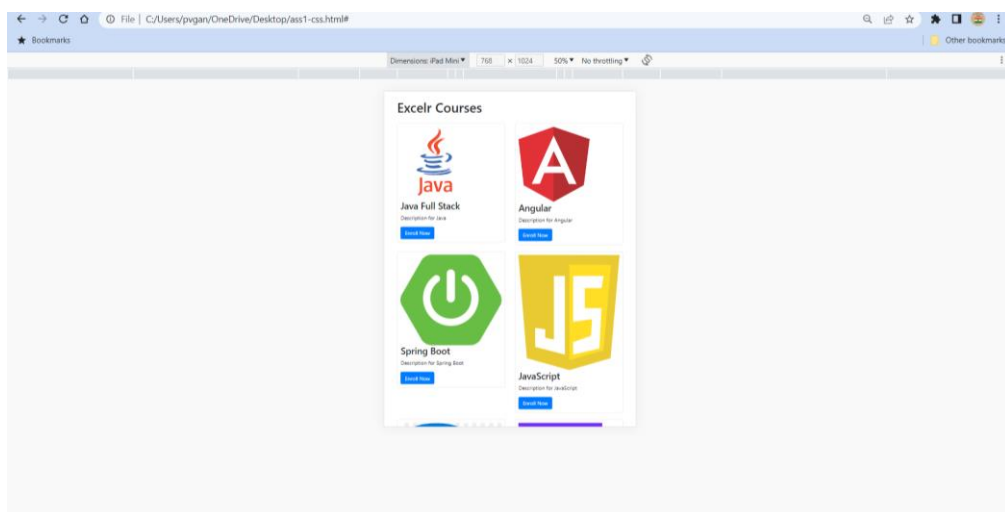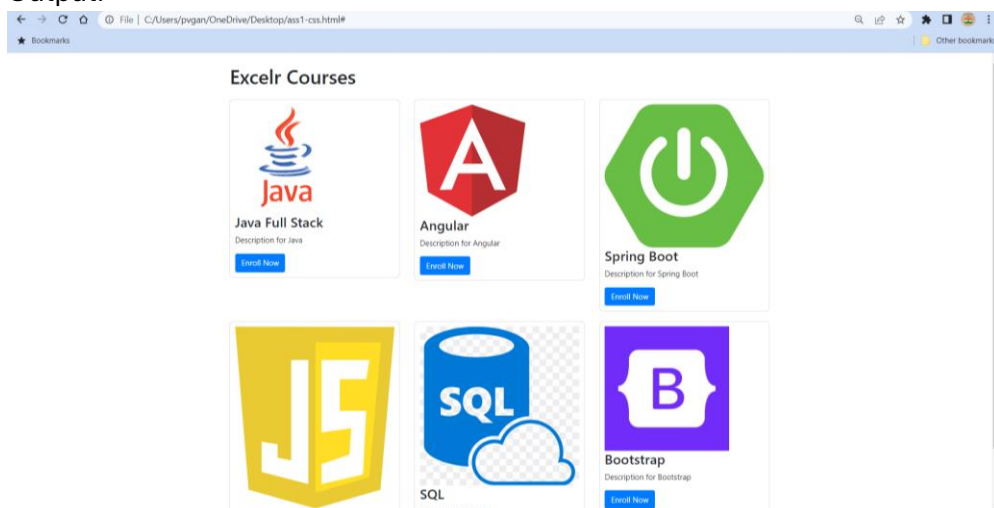

2.

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet"
  integrity="sha384-
T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min
.js"
  integrity="sha384-
C6RzsynM9kWDrmNeT87bh950GNyZPhcTNXj1NW7RuBCsyN/o0jlpcV8Qyq46cDfL"
  crossorigin="anonymous"></script>
  <title>question2 </title>
</head>


<body style="margin: 70px;">
  <div class="row">
    <div class="card bg-primary text-white" style="width: 20rem; margin:5px;
border: 0px; border-radius: 0px;">
      <div class="card-body">
        <h4>Primary Background with white text</h4>
        <p class="card-text">This is an example of using Bootstrap's primary
background colour with white text</p>
      </div>
    </div>
    <div class="card bg-dark text-white" style="width: 20rem; margin:5px;
border: 0px; border-radius: 0px;">
      <div class="card-body">
        <h4>Dark Background with white text</h4>
        <p class="card-text">This is an example of using a dark background
colour with white text</p>
      </div>
    </div>
  </div>
  <div class="row">
    <div class="card text-danger" style="width: 20rem; margin:5px; border:
0px; border-radius: 0px;">
      <div class="card-body">
        <h4>Danger Text Color</h4>
        <p class="card-text">This is an example of using Bootstrap's danger
text colour</p>
      </div>
    </div>
  </div>
</body>
</html>
```

```

    </div>
  </div>
  <div class="card text-white bg-info" style="width: 20rem; margin:5px;
border: 0px; border-radius: 0px;">
    <div class="card-body">
      <h4>Info Background with white text </h4>
      <p class="card-text">This is an example of using a custom background
color (info) with white text </p>
    </div>
  </div>
</div>
</body>

</html>

```

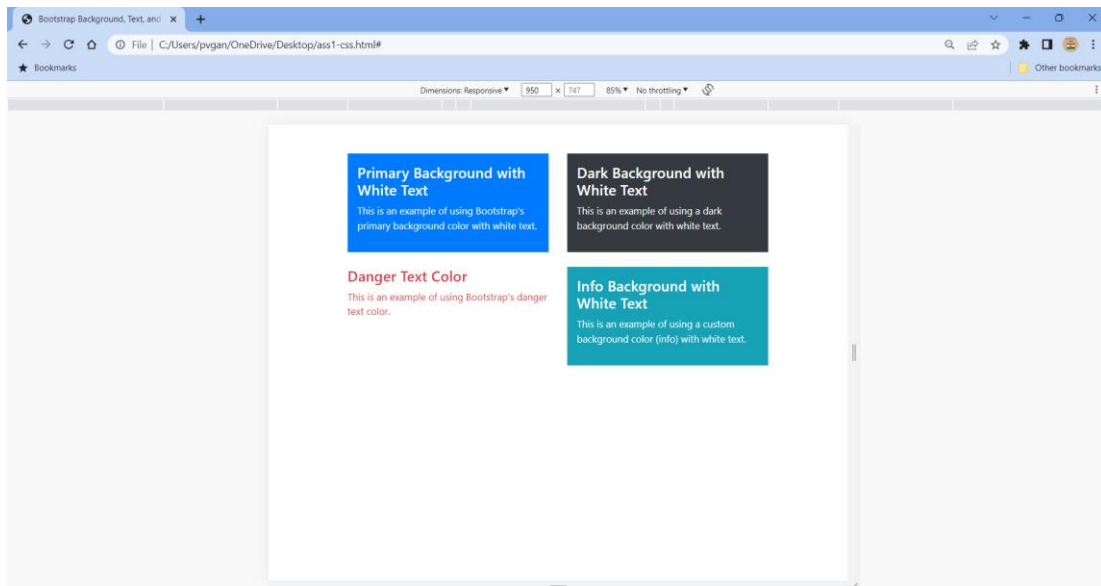

3.

```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet"
integrity="sha384-
T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">

```

```
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min
.js"
  integrity="sha384-
C6RzsynM9kWDrmNeT87bh950GNyZPhcTNXj1NW7RuBCsyN/o0jlpcV8Qyq46cDfL"
  crossorigin="anonymous"></script>
<title>Question 3</title>
</head>

<body>


<div class="container mt-4">
  <h1>Bootstrap Gutters</h1>
  <h2>Default Gutters</h2>
  <div class="row bg-light">
    <div class="col-md-4">
      <div class="text-black">Column 1</div>
    </div>
    <div class="col-md-4">
      <div class="text-black">Column 2</div>
    </div>
    <div class="col-md-4">
      <div class="text-black">Column 3</div>
    </div>
  </div>
  <h2 class="mt-4">No Gutters</h2>
  <div class="row no-gutters bg-light">
    <div class="col-md-4">
      <div class="text-black">Column 1</div>
    </div>
    <div class="col-md-4">
      <div class="text-black">Column 2</div>
    </div>
    <div class="col-md-4">
      <div class="text-black">Column 3</div>
    </div>
  </div>

  <h2 class="mt-4">Custom Gutters</h2>
  <div class="row">
    <div class="col text-black">Column 1</div>
    <div class="col text-black">Column 2</div>
  </div>
  <div class="row">
    <div class="col text-black">Column 3</div>
    <div class="col text-black">Column 4</div>
  </div>
  <div class="row">
```

```

        <div class="col text-black">Column 5</div>
        <div class="col text-black">Column 6</div>
    </div>
</div>
</body>
</html>

```

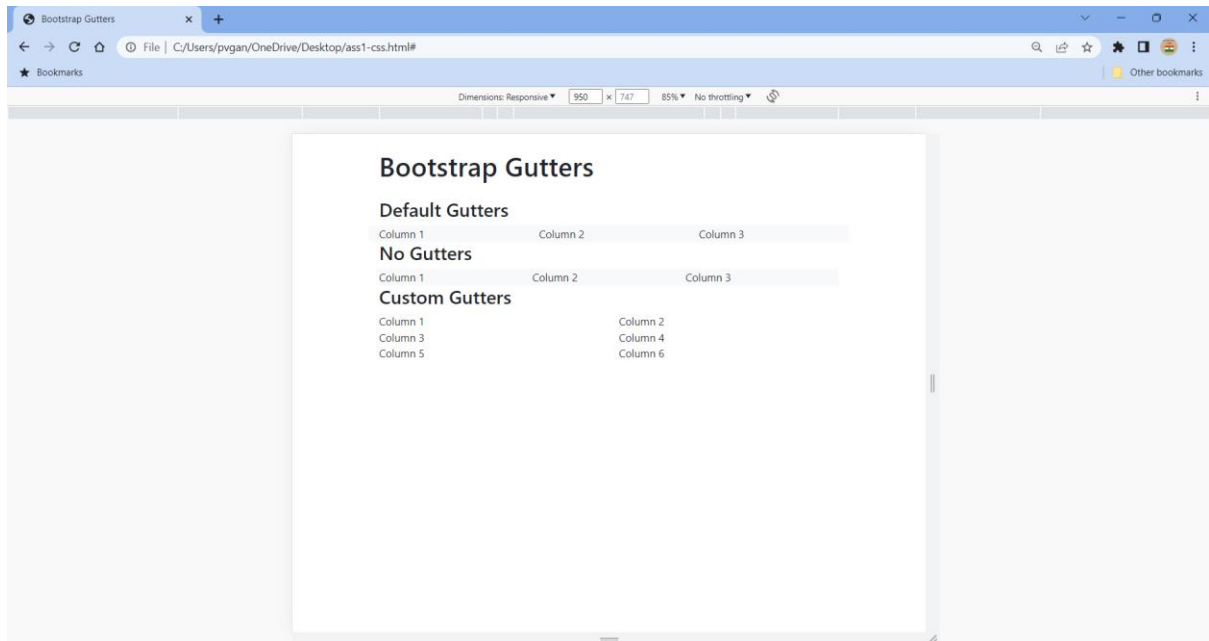

4.

```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet"
  integrity="sha384-
T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min
.js"
  integrity="sha384-
C6RzsynM9kWDrmNeT87bh95OGNyZPhcTNxj1NW7RuBCsyN/o0jlpcV8Qyq46cDfL"
crossorigin="anonymous"></script>

```

```

<title>Question4</title>
</head>

<body class="mx-3">
  <h1 class="text-center">Excelr Training</h1>
  <nav class="navbar navbar-expand-lg navbar-light bg-light">
    <div class="container-fluid">
      <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
data-bs-target="#navbarNav"
      aria-controls="navbarNav" aria-expanded="false" aria-label="Toggle
navigation">
        <span class="navbar-toggler-icon"></span>
      </button>
      <div class="collapse navbar-collapse" id="navbarNav">
        <ul class="navbar-nav ms-auto">
          <li class="nav-item">
            <a class="nav-link active" href="#">Home</a>
          </li>
          <li class="nav-item">
            <a class="nav-link" href="#">About</a>
          </li>
          <li class="nav-item">
            <a class="nav-link" href="#">Services</a>
          </li>
          <li class="nav-item">
            <a class="nav-link" href="#">Contact</a>
          </li>
        </ul>
      </div>
    </div>
  </nav>
  <div class="container-fluid bg-light text-center py-5">
    <div class="row">
      <div class="col-lg-12">
        <div class="jumbotron">
          <h1 class="display-4">Welcome to Excelr Training</h1>
          <p class="lead">This is a simple example of a responsive web layout
using Bootstrap.</p>
        </div>
      </div>
    </div>
  </div>
  <div class="container-fluid">
    <div class="row">
      <div class="col-md-6">
        <div class="p-3">
          <h5>Section 1</h5>

```




```

        <p>Excelr offers all emerging technologies from the industry with
live training and industry experts.</p>
    </div>
</div>
<div class="col-md-6">
    <div class="p-3">
        <h5>Section 2</h5>
        <p>Excelr offers all emerging technologies from the industry with
live training and industry experts.</p>
    </div>
</div>
</div>
</div>

<footer class="bg-light text-center py-3">
    <p>&copy; 2024 My Website. All rights reserved.</p>
</footer>
</body>

</html>

```

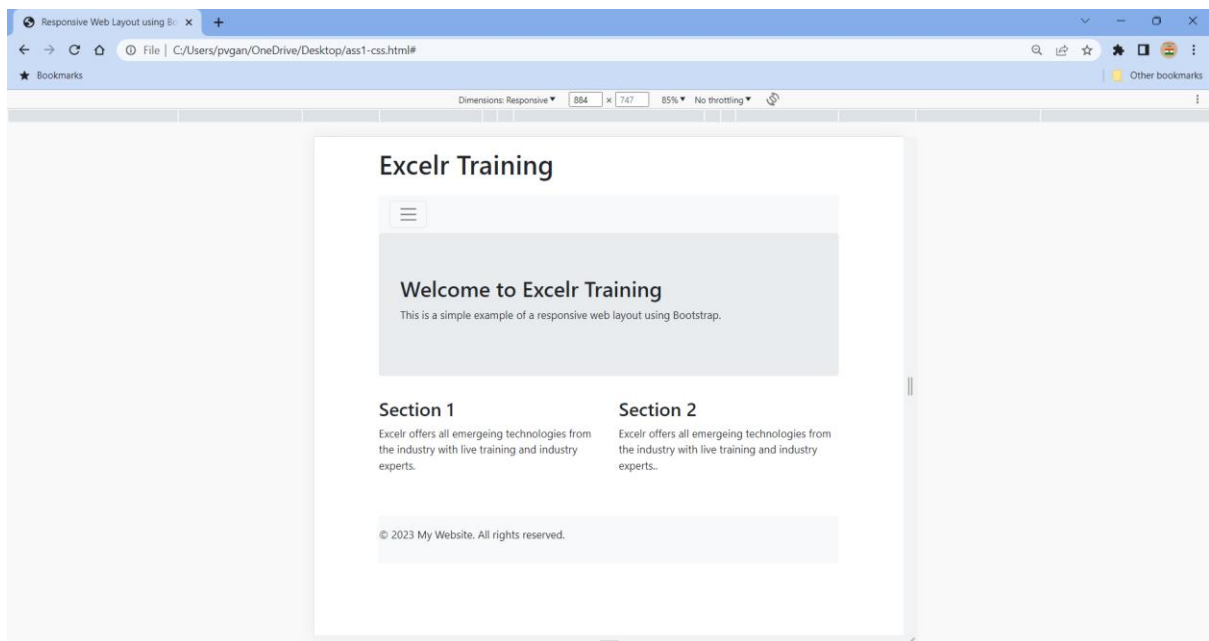



5.

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Question 5</title>
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet"
  integrity="sha384-
T3c6CoIi6uLrA9TneNEoa7RxnatzjcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
</head>

<body>
  <form class="container mt-5">
    <h4>Employee Registration Form</h4>
    <div class="mb-3">
      <label for="exampleInputName" class="form-label">Full Name:</label>
      <input type="text" class="form-control" id="exampleInputName">
    </div>
    <div class="mb-3">
      <label for="exampleInputEmail" class="form-label">Email:</label>
      <input type="email" class="form-control" id="exampleInputEmail">
    </div>
    <div class="mb-3">
      <label for="exampleInputPassword" class="form-label">Password:</label>
      <input type="password" class="form-control" id="exampleInputPassword">
    </div>
    <div class="mb-3">
      <label for="exampleGender" class="form-label">Gender:</label>
      <input type="text" class="form-control" id="exampleGender">
    </div>
    <div class="input-group">
      <button type="submit" class="btn btn-success form-
control">Register</button>
    </div>
  </form>
</body>

</html>
```

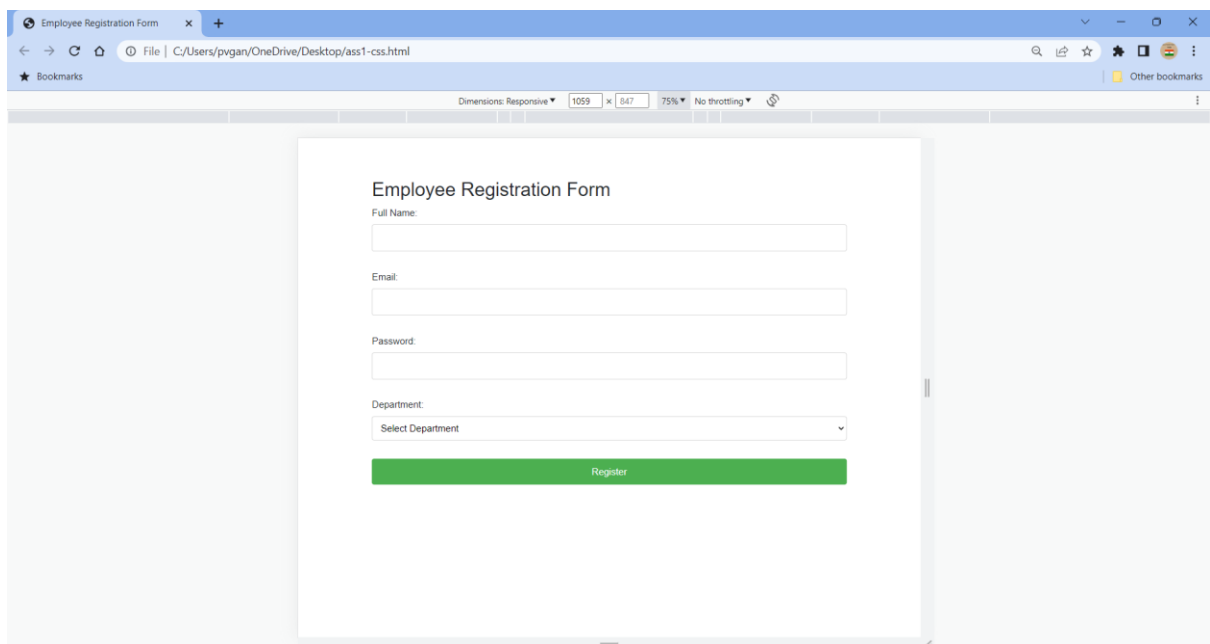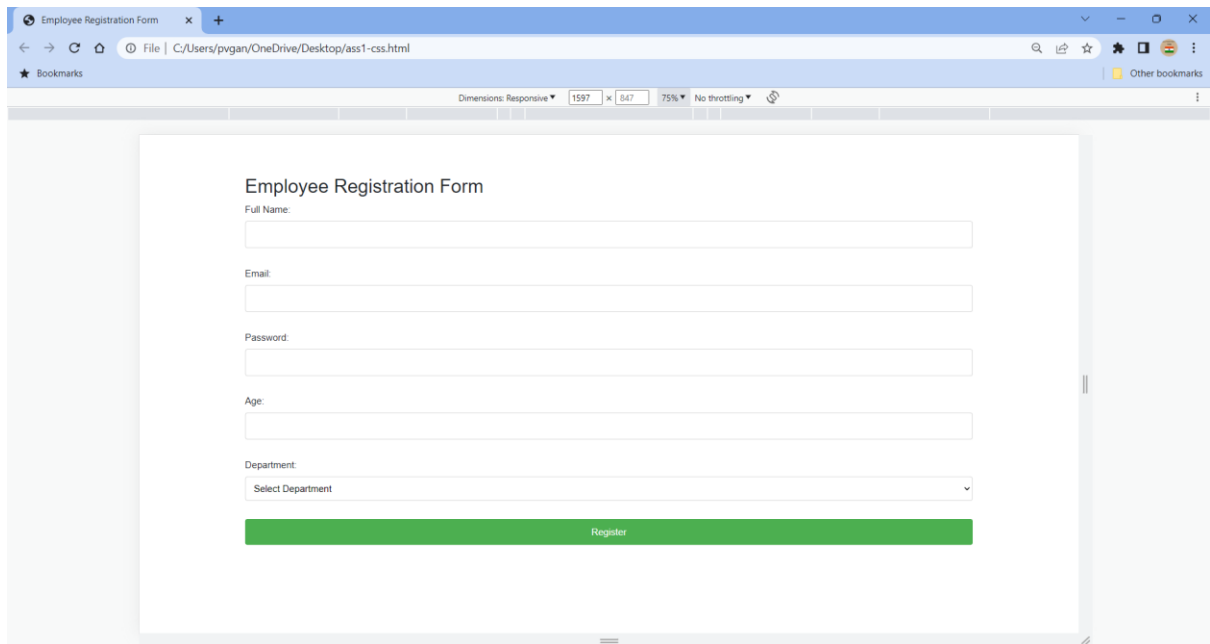

Employee Registration Form

File | C:/Users/pvgan/OneDrive/Desktop/ass1-css.html

Dimensions: Responsive 790 x 847 75% No throttling

Other bookmarks

Employee Registration Form

Full Name:

Email:

Password:

Gender:

Register