

# PMC: Build-Time Per-Modality Centroid Correction for Cross-Modal Binary-Quantized Retrieval

Se Hoon Kim  
Korea University  
Seoul, Republic of Korea  
sehoon787@korea.ac.kr

Jun Hyung Lee  
Korea University  
Seoul, Republic of Korea  
junicus@korea.ac.kr

Soonyoung Jung\*  
Korea University  
Seoul, Republic of Korea  
jsy@korea.ac.kr

## Abstract

Approximate nearest neighbor search is a core operator in large-scale retrieval, where vector quantization is widely used to reduce memory cost. Binary quantization methods encode each dimension as a single bit, but they assume queries and database vectors share a common centroid. This assumption fails in cross-modal retrieval, where each modality clusters around a different centroid, producing a modality gap that corrupts the centroid's dual role as inverted-file routing pivot and sign-bit decision boundary. We propose Per-Modality Centroid Correction (PMC), which shifts database vectors toward the query centroid at build time, rewriting routing and code boundaries at the source rather than merely adjusting queries at serving time. A selective variant confirms that concentrated gap energy in a few dimensions drives most recall loss. PMC adds no index memory or serving overhead; at  $\alpha=1$ , the correction is fully absorbed into the index with zero query-time cost. Experiments on five cross-modal benchmarks, three encoders, and four binary-quantized index types show gains over uncorrected and query-shifted baselines that scale with modality-gap magnitude, up to a 400M-vector deployment. Code: <https://github.com/sehoon787/PMC>.

## CCS Concepts

• **Information systems** → **Multimedia and multimodal retrieval**; *Search engine indexing*.

## Keywords

cross-modal retrieval, modality gap, approximate nearest neighbor search, binary quantization


## ACM Reference Format:

Se Hoon Kim, Jun Hyung Lee, and Soonyoung Jung. 2026. PMC: Build-Time Per-Modality Centroid Correction for Cross-Modal Binary-Quantized Retrieval. In *Proceedings of the 35th ACM International Conference on Information and Knowledge Management (CIKM '26)*, November 07–11, 2026, Rome, Italy. ACM, New York, NY, USA, 6 pages. <https://doi.org/10.1145/3799682.3840007>

\*Corresponding author.



This work is licensed under a Creative Commons Attribution 4.0 International License. *CIKM '26, Rome, Italy*  
© 2026 Copyright held by the owner/author(s).  
ACM ISBN 979-8-4007-2539-5/2026/11  
<https://doi.org/10.1145/3799682.3840007>

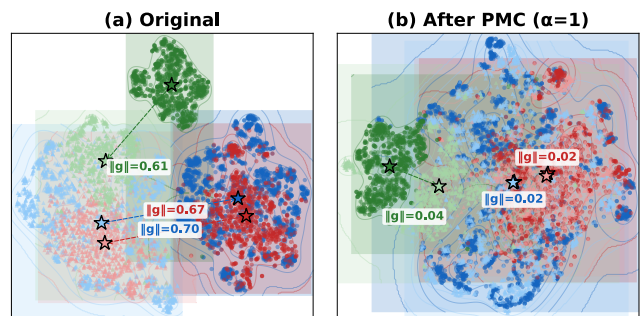

**Figure 1: t-SNE of ImageBind embeddings. (a) Each modality forms a separate cluster. (b) After PMC ( $\alpha=1$ ), paired modalities overlap. Blue = MSCOCO, red = Flickr30K, green = Clotho; dark = DB, light = query.**

## 1 Introduction


Multimodal foundation models such as CLIP [23] and ImageBind [9] map heterogeneous signals (images, text, audio) into a shared vector space for cross-modal vector similarity search [15]. At deployment scale, storage becomes the bottleneck: high-dimensional float32 embeddings can require terabytes of RAM, motivating approximate nearest neighbor (ANN) indexes that compress to a few bytes per vector [7, 14].

Binary quantization (BQ) is the extreme compression point: RaBitQ [7] reaches 32× compression by encoding each dimension as one sign bit relative to the dataset centroid. Its adoption in Apache Lucene BBQ and multi-bit Extended-RaBitQ [6] shows BQ indexing is now deployed in production.

These methods rely on a shared-centroid residual premise: queries and database vectors share a common centroid. Cross-modal retrieval violates this assumption—queries from one modality cluster around a different centroid than the database vectors.

This *modality gap* [21] is particularly harmful to BQ because the encoding  $\text{sign}(x_i - c_i)$  has *zero error margin*: the decision boundary passes exactly through the centroid, and any systematic displacement causes structured bit corruption that scales with gap magnitude (Figure 1); an oracle test (MSCOCO, CLIP-L) confirms this: same-modality queries ( $|g|=0$ ) reach  $R@100=0.71$  under RaBitQ, versus 0.54 for cross-modal queries ( $|g|=0.82$ ). Prior work addresses cross-modal retrieval through graph augmentation [2, 13], encoder fine-tuning [5], or embedding-space calibration [19], but none targets compressed ANN indexes where centroid misalignment corrupts both Inverted File (IVF) routing and binary codes.

In this paper, we analyze how the modality gap degrades BQ ANN indexes at two coupled stages—IVF routing and binary code formation—and, guided by this analysis, propose Per-Modality Centroid Correction (PMC), a one-time build-time alignment that shifts

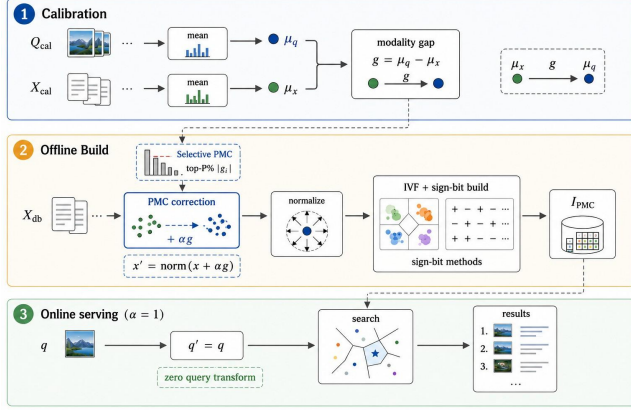

**Figure 2: PMC workflow: calibration estimates  $\mu_q$ ,  $\mu_x$ , and  $g = \mu_q - \mu_x$ ; offline build shifts/normalizes database vectors before BQ index construction; at  $\alpha=1$ , online serving uses  $q'=q$  and searches  $I_{PMC}$ .**

database vectors toward the query centroid before index construction. Unlike query-only mean shift, which leaves IVF centroids and quantized codes misaligned, PMC exploits the centroid’s dual role as IVF routing pivot and sign-bit decision boundary, rewriting both at the source with no serving-time query transform and no additional index memory (Figure 2). We validate PMC across five cross-modal benchmarks including 407M-scale LAION, three multimodal encoders, and four BQ index types. Our contributions:

- We show that the modality gap corrupts both IVF routing and binary codes, with recall loss scaling with gap magnitude.
- We discover that this corruption concentrates in a few high- $|g_i|$  dimensions; a selective PMC variant correcting only those recovers most recall.
- We propose PMC, a zero-cost build-time correction ( $\alpha=1$ ) that realigns routing and codes via the centroid’s dual role; ablation confirms DB-side over query-side correction.

## 2 Related Work

**Vector quantization for ANN.** Classical ANN compression methods such as Product Quantization (PQ)/OPQ [8, 14] quantize vectors by subspace codebooks, while newer systems such as ScaNN/SOAR/QAQ [12, 28, 34] improve scoring, routing, or query-aware ranking through anisotropic quantization and query-dependent computation. In the 1-bit regime, RaBitQ [7] provides distortion bounds for BQ. Extended-RaBitQ [6] generalizes this line to multi-bit settings, and later variants integrate quantization with graph structures [11]. Binary hashing methods such as ITQ [10] similarly rely on distributional alignment. Across these lines, the standard assumption is that query and database statistics are in-distribution and approximately centroid-aligned.

**Cross-modal and OOD retrieval.** Cross-modal and OOD retrieval methods usually intervene outside compressed code formation. OOD-DiskANN [13, 27] augments graph search for distribution shift; RoarGraph/DEG [2, 32] modify graph connectivity; DeDrift [1] and TCR [20] use test-time adaptation or retraining-style updates to counter drift. They are effective but usually assume

**Table 1: BQ methods (R@100, Vanilla / PMC) on MSCOCO (CLIP-B/32) and AudioCaps (IB). RotatedBinary = rotated BinaryFlat (BBQ-style).**

| Method        | MSCOCO    |           | AudioCaps |           |
|---------------|-----------|-----------|-----------|-----------|
|               | t→i       | i→t       | t→a       | a→t       |
| BinaryFlat    | .51 / .57 | .46 / .57 | .63 / .66 | .51 / .64 |
| BinaryIVF     | .51 / .57 | .47 / .57 | .59 / .61 | .50 / .63 |
| RotatedBinary | .29 / .58 | .21 / .57 | .65 / .70 | .63 / .69 |
| RaBitQ        | .58 / .64 | .52 / .61 | .75 / .75 | .67 / .75 |

### Algorithm 1: PMC Index Construction

**Require:** Database  $\mathcal{X}$  (modality  $b$ ), query sample  $Q$  (modality  $a$ ), interpolation  $\alpha$   
**Ensure:** IVF-based quantized index  $\mathcal{I}$  and gap  $g$

```

1:  $\mu_q \leftarrow \text{mean}(Q)$ ;  $\mu_x \leftarrow \text{mean}(\mathcal{X})$ 
2:  $g \leftarrow \mu_q - \mu_x$ 
3: for each  $x \in \mathcal{X}$  do
4:    $x' \leftarrow \text{normalize}(x + \alpha g)$ 
5: end for
6:  $\mathcal{I} \leftarrow \text{BuildIndex}(\{x'\})$ 
7: return  $\mathcal{I}, g$ 

```

▷ RaBitQ, BBQ, BinaryFlat

uncompressed vectors, additional graph structures, or online serving updates. PMC is complementary, not a direct baseline: one offline centroid correction in the 1-bit compressed regime, with no added index-time memory or retraining.

**Modality gap.** Mind-the-Gap [21] shows that cross-modal embedding spaces often exhibit stable centroid offsets between modalities. Follow-up analyses attribute this behavior to training dynamics [25], characterize its geometry [18], and study mean-subtraction effects [35]. Other work either preserves the gap [24] or reduces it through encoder retraining [5]; see also the recent survey [31]. No prior work addresses how the modality gap degrades *compressed* ANN indexes, where centroid misalignment corrupts both IVF routing and quantized codes; this is our focus.

A closely related line, gap-aware calibration for mixed-modality ranking [19], rescales scores to offset the centroid gap but works on uncompressed vectors, never enters code formation, and still subtracts the query mean at query time; PMC instead folds the correction into the database index at  $\alpha=1$ , rewriting IVF routing and binary codes at the source with no serving-time query transform.

## 3 Method

### 3.1 Problem Setup

Let  $\phi$  be a frozen multimodal encoder mapping inputs from modalities  $a$  and  $b$  into  $\mathbb{R}^d$ . The database  $\mathcal{X} = \{\phi(x_i)\}$  consists of modality- $b$  embeddings; queries  $q = \phi(q_j)$  come from modality  $a$ . We denote the per-modality means  $\mu_q = \mathbb{E}[\phi(q)]$  and  $\mu_x = \mathbb{E}[\phi(x)]$ , and the *modality gap*  $g = \mu_q - \mu_x$ . The goal is to build a compressed ANN index over  $\mathcal{X}$  that answers cross-modal queries with high recall under a fixed memory budget.


### 3.2 BQ Vulnerability to Modality Gap

BQ encodes each dimension as  $\hat{x}_i = \text{sign}(x_i - c_i)$  relative to centroid  $c$ , as in RaBitQ [7] and BBQ (Apache Lucene). With one bit, the decision boundary passes exactly through  $c$  with *zero error margin*. Let  $\delta_i = x_i - c_i$  be the residual under  $c = \mu_x$  (so  $b_i = \text{sign } \delta_i$ );

**Table 2: PMC main retrieval results (R@100,  $\alpha=1$ , IVFRaBitQFastScan) at the two operating points of Sec. 4.1: *No reranking* and *With reranking*. Each cell Vanilla / MeanShift / PMC; bold = best per cell.**

| Dataset    | Enc. | $\ g\ $ | No reranking       |                               |                                      | With reranking ( $K'=400$ ) |                                 |                                  |
|------------|------|---------|--------------------|-------------------------------|--------------------------------------|-----------------------------|---------------------------------|----------------------------------|
|            |      |         | $n_{\text{probe}}$ | $q \rightarrow db$            | $db \rightarrow q$                   | $n_{\text{probe}}$          | $q \rightarrow db$              | $db \rightarrow q$               |
| MSCOCO     | CLIP | .82     | 16                 | .58 / .54 / <b>.63</b>        | .50 / .49 / <b>.60</b>               | 64                          | .81 / .79 / <b>.90</b>          | .72 / .74 / <b>.87</b>           |
|            | CL-L | .82     | 16                 | .55 / .53 / <b>.65</b>        | .47 / .51 / <b>.63</b>               | 64                          | .79 / .77 / <b>.91</b>          | .66 / .73 / <b>.89</b>           |
|            | IB   | .70     | 16                 | .67 / .62 / <b>.75</b>        | .71 / .66 / <b>.75</b>               | 64                          | .93 / .87 / <b>.97</b>          | .93 / .88 / <b>.95</b>           |
| Flickr30K  | CL-L | .77     | 32                 | .41 / .34 / <b>.48</b>        | .33 / .37 / <b>.48</b>               | 32                          | .91 / .85 / <b>.97</b>          | .81 / .82 / <b>.96</b>           |
| Clotho     | IB   | .61     | 16                 | .72 / .60 / <b>.73</b>        | .62 / .51 / <b>.69</b>               | 32/64                       | <b>1.00</b> / .96 / <b>1.00</b> | .92 / .87 / <b>.98</b>           |
| AudioCaps  | IB   | .61     | 8/16               | .75 / <b>.78</b> / <b>.78</b> | <b>.83</b> / <b>.83</b> / <b>.83</b> | 64                          | <b>.98</b> / .88 / <b>.98</b>   | .90 / .84 / <b>.97</b>           |
| LAION-400M | CLIP | .72     | 256                | .108 / .074 / <b>.143</b>     | .069 / .043 / <b>.073</b>            | 256                         | .198 / .149 / <b>.277</b>       | <b>.158</b> / .080 / <b>.140</b> |

$q \rightarrow db$ : text-to-image/audio;  $db \rightarrow q$ : reverse. CL-L = CLIP-L; IB = ImageBind;  $\|g\|$  = modality-gap norm; MeanShift = query-only mean shift.  $n_{\text{probe}}$  split  $q \rightarrow db/db \rightarrow q$  where directions differ (AudioCaps, Clotho).

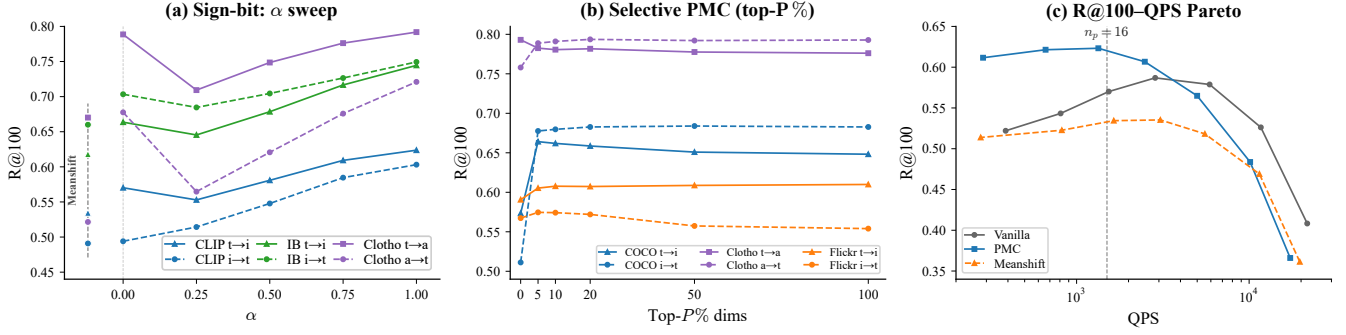

**Figure 3: (a) BQ R@100 vs. shift strength  $\alpha$  on MSCOCO+Clotho ( $\alpha=0$ : MeanShift,  $\alpha=1$ : full DB-side PMC):  $\alpha=1$  is best or near-best, justifying the default. (b) Selective PMC: on concentrated-gap MSCOCO, top- $P=5\%$  already reaches peak R@100; diffuse gaps require broader correction. (c) R@100-QPS Pareto: PMC dominates Vanilla across throughput levels.**

shifting to  $c^* = \mu_x + \alpha g$  flips dimension  $i$ 's sign iff

$$\delta_i(\delta_i - \alpha g_i) < 0, \quad \text{i.e.,} \quad 0 < \frac{\delta_i}{\alpha g_i} < 1. \quad (1)$$

Under smooth symmetric residual densities  $p_i$  near the decision boundary, a first-order expansion yields the expected number of flips:

$$\mathbb{E}[F] \approx \alpha \sum_i p_i(0) |g_i|, \quad (2)$$

a density-weighted  $\ell_1$  norm of the gap. Eq. (1) shows that flip risk in dimension  $i$  grows with  $|\alpha g_i|/|\delta_i|$ . When gap energy is concentrated—in CLIP-L on MSCOCO, top 10% of dimensions carry  $\approx 90\%$  of  $\|g\|^2$ —corruption is *structured* rather than random, biasing Hamming distance estimates systematically. The same offset misaligns IVF cluster assignments, compounding routing errors with code corruption. Eq. (2) formalizes this scaling, explaining the gap-proportional gains in Table 2 and the top-5% selective PMC result on concentrated-gap encoders (Figure 3b). Multi-bit quantization (IVFPQ [14], OPQ [8]) partially absorbs displacement through wider error margins; BQ is maximally vulnerable and is the focus of our main claims (multi-bit: Section 4.5). PMC applies to all sign( $\cdot$ -c) methods (BinaryFlat, BinaryIVF, BBQ, RaBitQ) and analogous schemes such as LSH [29].

### 3.3 PMC Correction

PMC applies a one-time centroid alignment *before* index construction. From a training sample of modality- $a$  queries and the modality- $b$  database, we compute the gap  $g$  and shift database vectors toward

the query centroid:

$$\mathbf{x}' = \frac{\mathbf{x} + \alpha g}{\|\mathbf{x} + \alpha g\|}, \quad \mathbf{q}' = \frac{\mathbf{q} - (1 - \alpha) g}{\|\mathbf{q} - (1 - \alpha) g\|} \quad (3)$$

where  $\alpha \in [0, 1]$  interpolates between full query-side correction ( $\alpha=0$ , equivalent to mean shift) and full database-side alignment ( $\alpha=1$ ). The BQ index is then built on  $\{\mathbf{x}'\}$ ; in our main setting  $\alpha=1$  (full database-side alignment), query-time transformation is identity ( $\mathbf{q}'=\mathbf{q}$ ), so serving incurs no extra cost.

**Effectiveness of  $\alpha=1$ .** Per-vector renormalization after the shift preserves unit-norm structure; the  $\alpha$ -sweep in Figure 3a confirms  $\alpha=1$  as best or near-best in all settings.

**Selective PMC as a mechanism test.** We restrict correction to top- $P\%$  dimensions ranked by  $|g_i|$ :

$$g_{\text{sel},i} = \begin{cases} g_i & \text{if } |g_i| \geq |g|_{(P)} \\ 0 & \text{otherwise} \end{cases}, \quad \mathbf{x}'_{\text{sel}} = \frac{\mathbf{x} + \alpha g_{\text{sel}}}{\|\mathbf{x} + \alpha g_{\text{sel}}\|} \quad (4)$$

where  $|g|_{(P)}$  is the top- $P\%$  magnitude threshold on  $|g_i|$ . The cumulative energy captured by  $g_{\text{sel}}$  is

$$\mathcal{E}(P) = \frac{\sum_{i \in S_P} g_i^2}{\|g\|^2}, \quad S_P = \{i : |g_i| \geq |g|_{(P)}\}. \quad (5)$$

Since flip risk concentrates in high- $|g_i|$  dimensions (Eq. (1)), correcting only the highest-energy ones suffices: for CLIP the top 10% by  $|g_i|$  carry 86–92% of total gap energy, so  $P=5\%$  already recovers peak recall; ImageBind's diffuse gap ( $\approx 72\%$ ) requires full-vector correction.

**Table 3: R@10 at the no-reranking operating points of Table 2. Each cell Vanilla / MeanShift / PMC; bold = best per cell.**

| Dataset    | Enc. | $q \rightarrow db$        | $db \rightarrow q$        |
|------------|------|---------------------------|---------------------------|
| MSCOCO     | CLIP | .40 / .38 / <b>.46</b>    | .29 / .30 / <b>.39</b>    |
|            | CL-L | .36 / .37 / <b>.48</b>    | .26 / .35 / <b>.44</b>    |
|            | IB   | .55 / .51 / <b>.63</b>    | .57 / .54 / <b>.64</b>    |
| Flickr30K  | CL-L | .31 / .26 / <b>.38</b>    | .22 / .29 / <b>.38</b>    |
| Clotho     | IB   | .59 / .45 / <b>.60</b>    | .48 / .35 / <b>.54</b>    |
| AudioCaps  | IB   | .39 / .43 / <b>.44</b>    | .44 / .46 / <b>.48</b>    |
| LAION-400M | CLIP | .075 / .038 / <b>.086</b> | .035 / .028 / <b>.048</b> |

**Table 4: Mechanism/control checks ( $\alpha=1$ ).  $J@100$ : top-100 Jac-card vs. exact-IP GT;  $\cos@25$ : calibration cosine at  $n_{\text{calib}}=25$ .**

| Direction                   | Flip% | $J@100$ | BinaryFlat R@100        | $\cos@25$ |
|-----------------------------|-------|---------|-------------------------|-----------|
| MSCOCO $t \rightarrow i$    | 16.14 | .585    | .507 $\rightarrow$ .570 | .986      |
| MSCOCO $i \rightarrow t$    | 15.99 | .542    | .458 $\rightarrow$ .568 | .986      |
| AudioCaps $t \rightarrow a$ | 14.34 | .801    | .630 $\rightarrow$ .660 | .971      |
| AudioCaps $a \rightarrow t$ | 17.84 | .799    | .514 $\rightarrow$ .644 | .955      |

**Table 5: MSCOCO/CLIP-B/32: component ablation and IVF-RaBitQ controls. Rand/Shuf are mean $\pm$ std over 5 seeds.**

| Component ablation  |      |        |           |           |         |        |
|---------------------|------|--------|-----------|-----------|---------|--------|
| Index               | Dir. | Van.   |           | Q-only    | DB-only | Both   |
| BinaryFlat          | t→i  | .507   |           | .569      | .570    | .570   |
| BinaryFlat          | i→t  | .458   |           | .571      | .568    | .569   |
| IVF-RaBitQ          | t→i  | .578   |           | .541      | .637    | .599   |
| IVF-RaBitQ          | i→t  | .515   |           | .495      | .608    | .554   |
| <hr/>               |      |        |           |           |         |        |
| IVF-RaBitQ controls |      |        |           |           |         |        |
| Dir.                | Van. | DB-PMC |           | Rand      | Shuf    | S-Flip |
|                     |      |        |           | NoNorm    |         |        |
| t→i                 | .578 | .637   | .562±.009 | .552±.006 | .514    | .555   |
| i→t                 | .515 | .608   | .564±.009 | .559±.009 | .491    | .520   |

## 4 Experiments

### 4.1 Setup

We evaluate three frozen backbones—CLIP ViT-B/32 ( $d=512$ ) [23], CLIP ViT-L/14 ( $d=768$ ), ImageBind ( $d=1024$ ) [9]—on image-text and audio-text retrieval: MSCOCO 5K [22], Flickr30K ( $n=31K$ ) [33], AudioCaps [17] (884 clips, 4,415 captions; audio DB), Clotho v2 ( $n=5,926$ ) [4], and LAION-400M (407M vectors, 410 shards; exact inner-product (IP) ground truth for 10K random queries per direction via per-shard IndexFlatIP merged into a global top-100—a full-corpus brute-force scan) [26]. Indexes use FAISS [3, 16]: IVFRaBitQFastScan (1-bit, 33–136 B/vec) and IVFPQ/OPQ [8, 14] ( $m=16$ , 64 B/vec); per FAISS’s IVF heuristic,  $n_{\text{list}}=\lceil \sqrt{n} \rceil$  and  $n_{\text{probe}} \approx n_{\text{list}}/4$ , matched across methods; with reranking (Sec. 4.3) we set  $n_{\text{probe}} \approx n_{\text{list}}$  and exact-rerank the top  $K'=400$ ; LAION uses  $n_{\text{list}}=80K \approx 4\sqrt{N}$ ,  $n_{\text{probe}}=256$ , 30.4 GB at 72 B/vec (28 $\times$ ); PMC leaves bytes/vector identical to Vanilla; BQ baselines: BinaryFlat, BinaryIVF, rotated BinaryFlat (BBQ-style). We report R@100 against exact-IP ground truth on original (unshifted) embeddings, except AudioCaps, which uses standard caption annotations (one clip per caption; that clip’s captions in reverse)—PMC modifies only the index-internal representation (analogous to OPQ rotation), so gains reflect better approximation, not redefined relevance—and QPS (queries per second) as the single-threaded median over 5 runs. All runs use a single Intel Core i7-12700F, 32 GB RAM, CPU-only.

### 4.2 Main Results

PMC improves RaBitQ recall in nearly all tested configurations, with gains scaling with gap magnitude (Table 2): Flickr30K  $i \rightarrow t$

**Table 6: PMC generality on IVFPQ and OPQ across encoders (R@100 Vanilla/PMC, mean over both directions; per-direction omitted).**

| Dataset | Enc. | IVFPQ            |          | OPQ              |          |
|---------|------|------------------|----------|------------------|----------|
|         |      | R@100            | $\Delta$ | R@100            | $\Delta$ |
| MSCOCO  | CLIP | .52 / <b>.64</b> | +23%     | .64 / <b>.67</b> | +4%      |
|         | CL-L | .39 / <b>.61</b> | +56%     | .57 / <b>.67</b> | +17%     |
|         | IB   | .59 / <b>.69</b> | +17%     | .70 / <b>.77</b> | +9%      |
| Flickr  | CL-L | .47 / <b>.50</b> | +7%      | .51 / <b>.52</b> | +1%      |

reaches +45% and MSCOCO CLIP-L  $i \rightarrow t$  +34%. MeanShift can hurt—it leaves IVF centroids misaligned, degrading routing—while PMC improves or matches both directions. Across all 16 BQ method  $\times$  direction configurations, PMC improves or matches R@100 without exception (Table 1); the same ordering holds at R@10, where PMC is best in all 14 dataset  $\times$  direction configurations (Table 3), so the gain is not confined to deep result lists. PMC adds no per-query work, so QPS tracks Vanilla across all  $n_{\text{probe}}$  (Figure 3c).

**$\|g\|$  as predictor.** The ratio condition (1) implies more flips at higher gap, and R@100 gains track  $\|g\|$ : MSCOCO CL-L ( $\|g\|=82$ ) and Flickr30K CL-L ( $\|g\|=77$ ) show the largest gains, whereas AudioCaps ( $\|g\|=61$ ) gains only marginally—its gap is small relative to intra-class variance. Direct bit-level checks corroborate this (Table 4): PMC induces 14–18% sign-bit flips while preserving nontrivial ground-truth top-100 overlap ( $J@100=0.54\text{--}0.80$ ) and repairs BinaryFlat R@100 in every direction.

At 407M-vector deployment scale, LAION-400M ( $\|g\|=72$ ) confirms the gap-proportional pattern in both directions (Table 2).

### 4.3 Robustness under Exact Reranking

With reranking [30] we exact-rescore the top- $K'$  candidates (Sec. 4.1; identical per-method budget). Vanilla’s no-rerank recall is capped by what its corrupted codes admit; PMC repairs the pool and carries this lead into reranking, improving or matching Vanilla and MeanShift in every cell except LAION-400M reverse across  $K' \in \{100, 200, 400, 500\}$  (MSCOCO  $t \rightarrow i$  PMC .62/.80/.90/.93 vs. Vanilla .53/.69/.81/.85; Table 2 reports  $K'=400$ ), reaching  $R@100 \geq 0.90$  at a smaller budget. There, exact rescoring lets Vanilla overtake PMC at  $K' \geq 200$ —a scan-depth effect: LAION probes only 0.32% of its lists ( $n_{\text{probe}}=256$ ), so PMC’s flatter pool covers fewer true positives, whereas small corpora rerank near-exhaustively.

### 4.4 Ablation Study

Calibration is stable from  $n_{\text{calib}}=25$  (cosine 0.955–0.986 across modalities, Table 4; R@100 flat within .003 up to  $n_{\text{calib}}=400$ ), making PMC practical with few cross-modal samples. BinaryFlat is insensitive to shift direction, but IVF-RaBitQ strongly prefers DB-only correction (.637/.608) over Q-only (.541/.495) or both sides (.599/.554)—shifting both re-displaces the routing pivot, confirming the centroid must be corrected at the source, where it is both routing pivot and code boundary. Four controls (random, shuffled, sign-flipped, unnormalized shift) all trail DB-PMC (Table 5), ruling out arbitrary perturbation.

### 4.5 Multi-Bit Generality

PMC generalizes beyond 1-bit: averaged over both directions it improves IVFPQ and OPQ across all encoders and datasets (audio omitted;  $n_{\text{db}}$  too small for codebook training), with the

gap-proportional trend persisting (Table 6). OPQ’s learned rotation partly absorbs the shift, giving smaller but complementary gains; IVFPQ lacks this and benefits more.

## 5 Conclusion

PMC corrects cross-modal centroid mismatch in compressed ANN with a build-time, database-side shift that rewrites routing pivots and sign-bit boundaries at the source, yielding gains that scale with modality-gap magnitude at no extra index memory and, at  $\alpha=1$ , no serving-time query transform. The one regime favoring uncorrected codes—deep reranking under sub-1% list probing at 400M scale—is a scan-depth effect. Drift-adaptive  $\alpha$ , graph-based ANN, and billion-scale deployment remain future work.

## Acknowledgments

This work was supported by the National Research Foundation of Korea (NRF) grant funded by the Korean government (MSIT) (No. 00359638).

## GenAI Usage Disclosure

Generative AI tools (Claude) were used for code scaffolding and LaTeX formatting. All experimental design, results, analyses, and scientific claims were independently produced and verified by the authors.

## References

- [1] Dmitry Baranchuk, Matthijs Douze, Yash Upadhyay, and I. Zeki Yalniz. 2023. DeDrift: Robust Similarity Search under Content Drift. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*. 992–1001. doi:10.1109/ICCV51070.2023.00098
- [2] Meng Chen, Kai Zhang, Zhenying He, Yinan Jing, and X. Sean Wang. 2024. RoarGraph: A Projected Bipartite Graph for Efficient Cross-Modal Approximate Nearest Neighbor Search. *Proceedings of the VLDB Endowment* 17, 11 (2024), 2735–2749. doi:10.14778/3681954.3681959
- [3] Matthijs Douze, Alexandr Guzhva, Chengqi Deng, Jeff Johnson, Gergely Szilvasy, Pierre-Emmanuel Mazaré, Maria Lomeli, Lucas Hosseini, and Hervé Jégou. 2024. The Faiss Library. *IEEE Transactions on Big Data* (2024). doi:10.1109/TBDDATA.2024.3457877
- [4] Konstantinos Drossos, Samuel Lipping, and Tuomas Virtanen. 2020. Clotho: An Audio Captioning Dataset. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 736–740. doi:10.1109/ICASSP40776.2020.9052990
- [5] Sedigheh Eslami and Gerard de Melo. 2025. Mitigate the Gap: Improving Cross-Modal Alignment in CLIP. In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- [6] Jianyang Gao, Yutong Gou, Yuxuan Xu, Yongyi Yang, Cheng Long, and Raymond Chi-Wing Wong. 2025. Practical and Asymptotically Optimal Quantization of High-Dimensional Vectors in Euclidean Space for Approximate Nearest Neighbor Search. *Proc. ACM Manag. Data* 3, 3 (2025). SIGMOD 2025.
- [7] Jianyang Gao and Cheng Long. 2024. RaBitQ: Quantizing High-Dimensional Vectors with a Theoretical Error Bound for Approximate Nearest Neighbor Search. In *Proceedings of the ACM SIGMOD International Conference on Management of Data*. 6–18. doi:10.1145/3654923
- [8] Tiezheng Ge, Kaiming He, Qifa Ke, and Jian Sun. 2013. Optimized Product Quantization for Approximate Nearest Neighbor Search. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. 2946–2953. doi:10.1109/CVPR.2013.379
- [9] Rohit Girdhar, Alaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. 2023. ImageBind: One Embedding Space to Bind Them All. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. 15180–15190.
- [10] Yunchao Gong, Svetlana Lazebnik, Albert Gordo, and Florent Perronnin. 2013. Iterative Quantization: A Procrustean Approach to Learning Binary Codes for Large-Scale Image Retrieval. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 35, 12 (2013), 2916–2929. doi:10.1109/TPAMI.2012.193
- [11] Yutong Gou, Jianyang Gao, Yuxuan Xu, and Cheng Long. 2025. SymphonyQG: Towards Symphonious Integration of Quantization and Graph for Approximate Nearest Neighbor Search. *Proc. ACM Manag. Data* 3, 1 (2025). doi:10.1145/3709730
- [12] Ruiqi Guo, Philip Sun, Erik Lindgren, Quan Geng, David Simcha, Felix Chern, and Sanjiv Kumar. 2020. Accelerating Large-Scale Inference with Anisotropic Vector Quantization. In *Proceedings of the 37th International Conference on Machine Learning (ICML)*, Vol. 119. PMLR, 3887–3896.
- [13] Shikhar Jaiswal, Ravishankar Krishnaswamy, Ankit Garg, Harsha Vardhan Simhadri, and Sheshansh Agrawal. 2022. OOD-DiskANN: Efficient and Scalable Graph ANNS for Out-of-Distribution Queries. *arXiv preprint arXiv:2211.12850* (2022). doi:10.48550/arXiv.2211.12850
- [14] Hervé Jégou, Matthijs Douze, and Cordelia Schmid. 2011. Product Quantization for Nearest Neighbor Search. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 33, 1 (2011), 117–128.
- [15] Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc V. Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. 2021. Scaling Up Visual and Vision-Language Representation Learning With Noisy Text Supervision. In *Proceedings of the 38th International Conference on Machine Learning (ICML)*, Vol. 139. PMLR, 4904–4916.
- [16] Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2021. Billion-Scale Similarity Search with GPUs. *IEEE Transactions on Big Data* 7, 3 (2021), 535–547.
- [17] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. 2019. AudioCaps: Generating Captions for Audios in the Wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*. 119–132. doi:10.18653/v1/N19-1011
- [18] Meir Yossef Levi and Guy Gilboa. 2025. The Double-Ellipsoid Geometry of CLIP. In *Proceedings of the 42nd International Conference on Machine Learning (ICML) (Proceedings of Machine Learning Research, Vol. 267)*. PMLR, 33999–34019.
- [19] Bin Xu Li, Yuhui Zhang, Xiaohan Wang, Weixin Liang, Ludwig Schmidt, and Serena Yeung-Levy. 2025. Closing the Modality Gap for Mixed Modality Search. *arXiv preprint arXiv:2507.19054* (2025). doi:10.48550/arXiv.2507.19054
- [20] Haobin Li, Peng Hu, Qianjun Zhang, Xi Peng, Xiting Liu, and Mouxing Yang. 2025. Test-time Adaptation for Cross-modal Retrieval with Query Shift. In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- [21] Victor Weixin Liang, Yuhui Zhang, Yongchan Kwon, Serena Yeung, and James Y. Zou. 2022. Mind the Gap: Understanding the Modality Gap in Multi-modal Contrastive Representation Learning. In *Advances in Neural Information Processing Systems (NeurIPS)*. 17612–17625.
- [22] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. 2014. Microsoft COCO: Common Objects in Context. In *Proceedings of the European Conference on Computer Vision (ECCV)*. 740–755. doi:10.1007/978-3-319-10602-1\_48
- [23] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning Transferable Visual Models From Natural Language Supervision. In *Proceedings of the 38th International Conference on Machine Learning (ICML)*. 8748–8763.
- [24] Sameera Ramasinghe, Violetta Shevchenko, Gil Avraham, and Thalaiyasingam Ajanthan. 2024. Accept the Modality Gap: An Exploration in the Hyperbolic Space. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. 27253–27262. doi:10.1109/CVPR52733.2024.02574
- [25] Simon Schrodi, David T. Hoffmann, Max Argus, Volker Fischer, and Thomas Brox. 2025. Two Effects, One Trigger: On the Modality Gap, Object Bias, and Information Imbalance in Contrastive Vision-Language Models. In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- [26] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, Patrick Schramowski, Srivatsa Santhanam, Khalid Q. Parhar, Samir Yitzhak Gadre, Yaroslav Bulatov, Stephan Ilg, Dmitry Budzianowski, Yannic Annas, Robin Rombach, and Edward Hall. 2021. LAION-400M: Open Dataset of Clip-Filtered 400 Million Image-Text Pairs. *arXiv preprint arXiv:2111.02114* (2021). doi:10.48550/arXiv.2111.02114
- [27] Suhas Jayaram Subramanya, Fnu Devvrit, Rohan Kadekodi, Ravishankar Krishnaswamy, and Harsha Vardhan Simhadri. 2019. DiskANN: Fast Accurate Billion-point Nearest Neighbor Search on a Single Node. In *Advances in Neural Information Processing Systems 32 (NeurIPS)*. 13766–13776.
- [28] Philip Sun, David Simcha, Dave Dopson, Ruiqi Guo, and Sanjiv Kumar. 2023. SOAR: Improved Indexing for Approximate Nearest Neighbor Search. In *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 36. 3189–3204.
- [29] Jingdong Wang, Ting Zhang, Jingkuan Song, Nicu Sebe, and Heng Tao Shen. 2018. A Survey on Learning to Hash. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 40, 4 (2018), 769–790. doi:10.1109/TPAMI.2017.2699960
- [30] Lidan Wang, Jimmy Lin, and Donald Metzler. 2011. A Cascade Ranking Model for Efficient Ranked Retrieval. In *Proceedings of the 34th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR)*. 105–114. doi:10.1145/2009916.2009934
- [31] Tianshi Wang, Fengling Li, Lei Zhu, Jingling Li, Zheng Zhang, and Heng Tao Shen. 2024. Cross-Modal Retrieval: A Systematic Review of Methods and Future Directions. *Proc. IEEE* 112, 11 (2024), 1716–1754. doi:10.1109/jproc.2024.3525147

- [32] Ziqi Yin, Jianyang Gao, Pasquale Balsebre, Gao Cong, and Cheng Long. 2025. DEG: Efficient Hybrid Vector Search Using the Dynamic Edge Navigation Graph. *Proceedings of the ACM on Management of Data* 3, 1, Article 29 (2025). doi:10.1145/3709679
- [33] Peter Young, Alice Lai, Micah Hodosh, and Julia Hockenmaier. 2014. From Image Descriptions to Visual Denotations: New Similarity Metrics for Semantic Inference over Event Descriptions. *Transactions of the Association for Computational Linguistics* 2 (2014), 67–78. doi:10.1162/tacl\_a\_00166
- [34] Jin Zhang, Defu Lian, Haodi Zhang, Baoyun Wang, and Enhong Chen. 2023. Query-Aware Quantization for Maximum Inner Product Search. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 37. 4875–4883. doi:10.1609/aaai.v37i4.25613
- [35] Yuhui Zhang, Elaine Sui, and Serena Yeung-Levy. 2024. Connect, Collapse, Corrupt: Learning Cross-Modal Tasks with Uni-Modal Data. In *The Twelfth International Conference on Learning Representations (ICLR)*.