



unstableMsgSet = {m1}



m1




unstableMsgSet = {m1}





unstableMsgSet = {m1}



unstableMsgSet = {m1}




```
canDeliver(mgs.viewId) ?  
IF YES  
THEN: print(N2 delivers m1 from N1 in view 1)  
ELSE  
deferredMsgSet.add(m1)
```



VM

unstableMsgSet = {m1}



N1

unstableMsgSet = {m1}



N2




m1

N2 delivers m1 from N1 in view 1



VM

unstableMsgSet = {m1}



N1

unstableMsgSet = {m1}



N2

m1



stabilization m1 timeout



unstableMsgSet = {}




s(m1)

unstableMsgSet = {}



m1




stabilization m1 timeout

view = {A, B, C, D}



unstableMsgSet = {m1}




m1

m1




CRASHED!



unstableMsgSet = {m1}



unstableMsgSet = {m1}





unstableMsgSet = {}

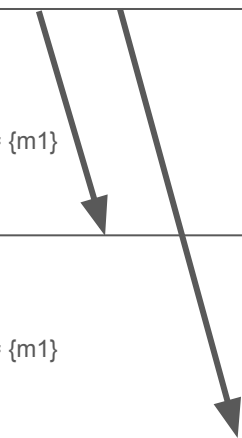


view = {A, B, C, D}




unstableMsgSet = {m1}




unstableMsgSet = {m1}





unstableMsgSet = {m1}





unstableMsgSet = {}




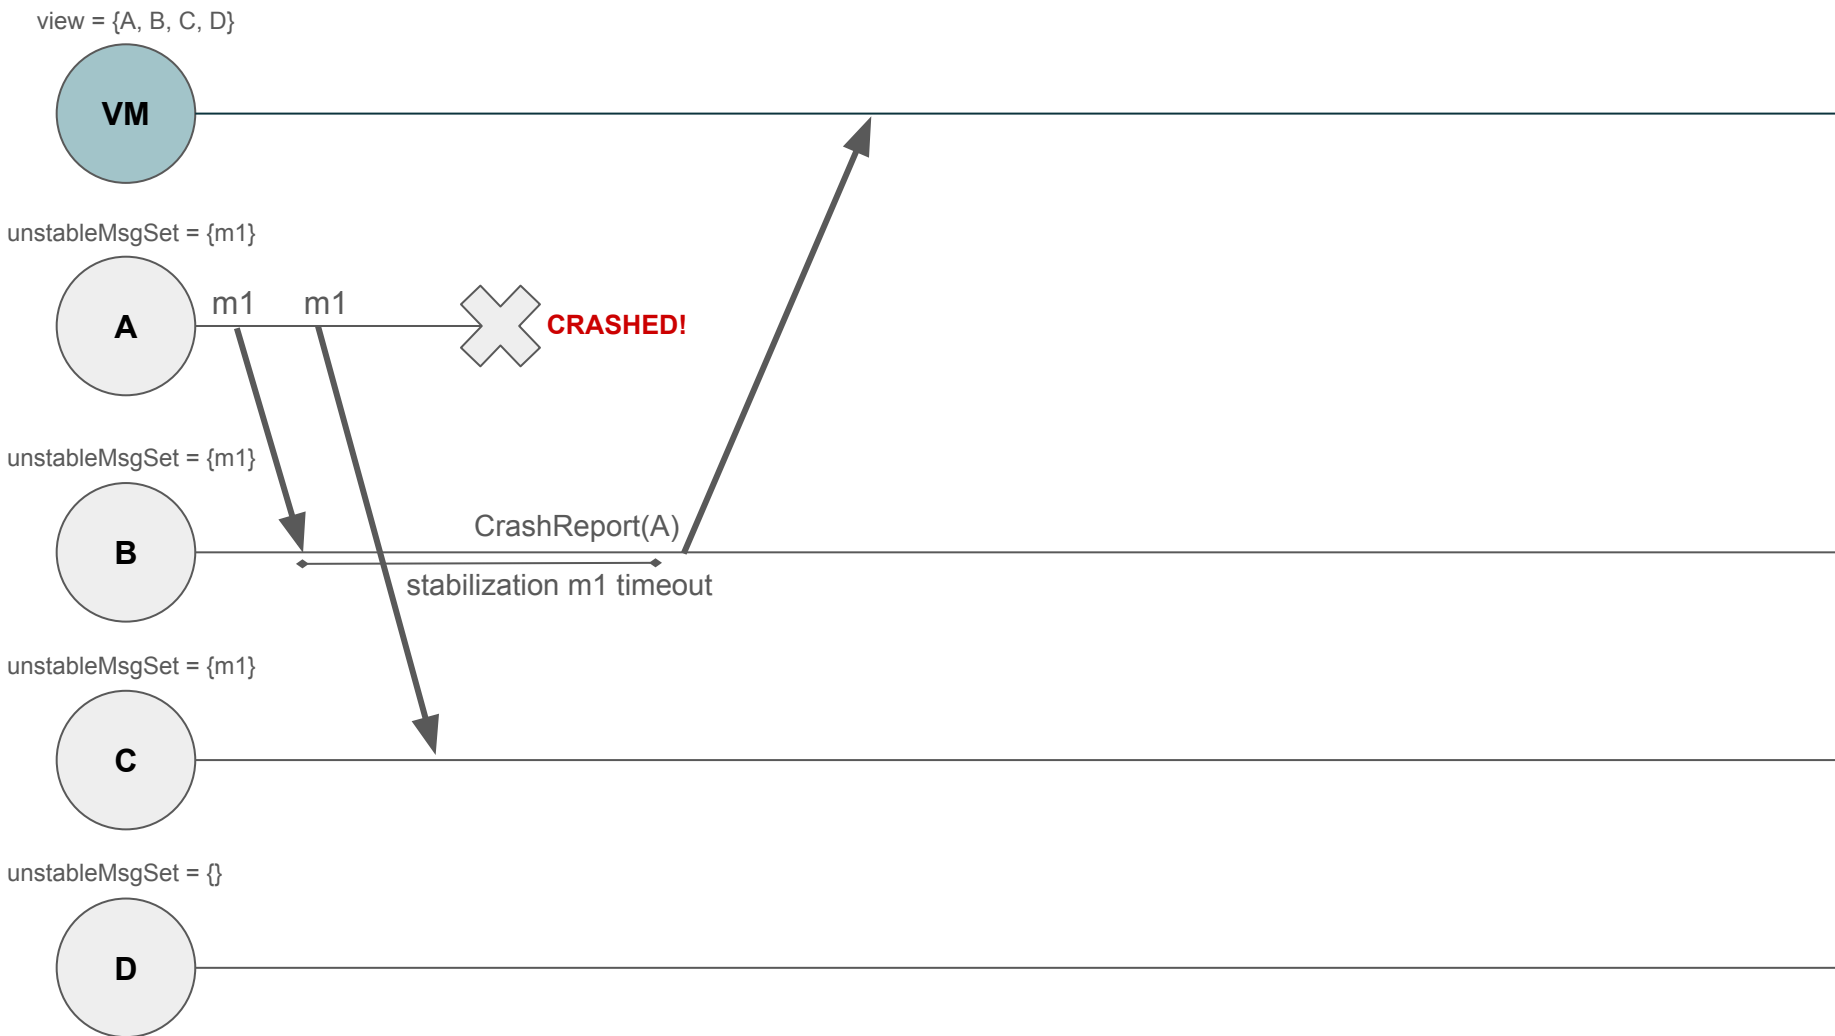


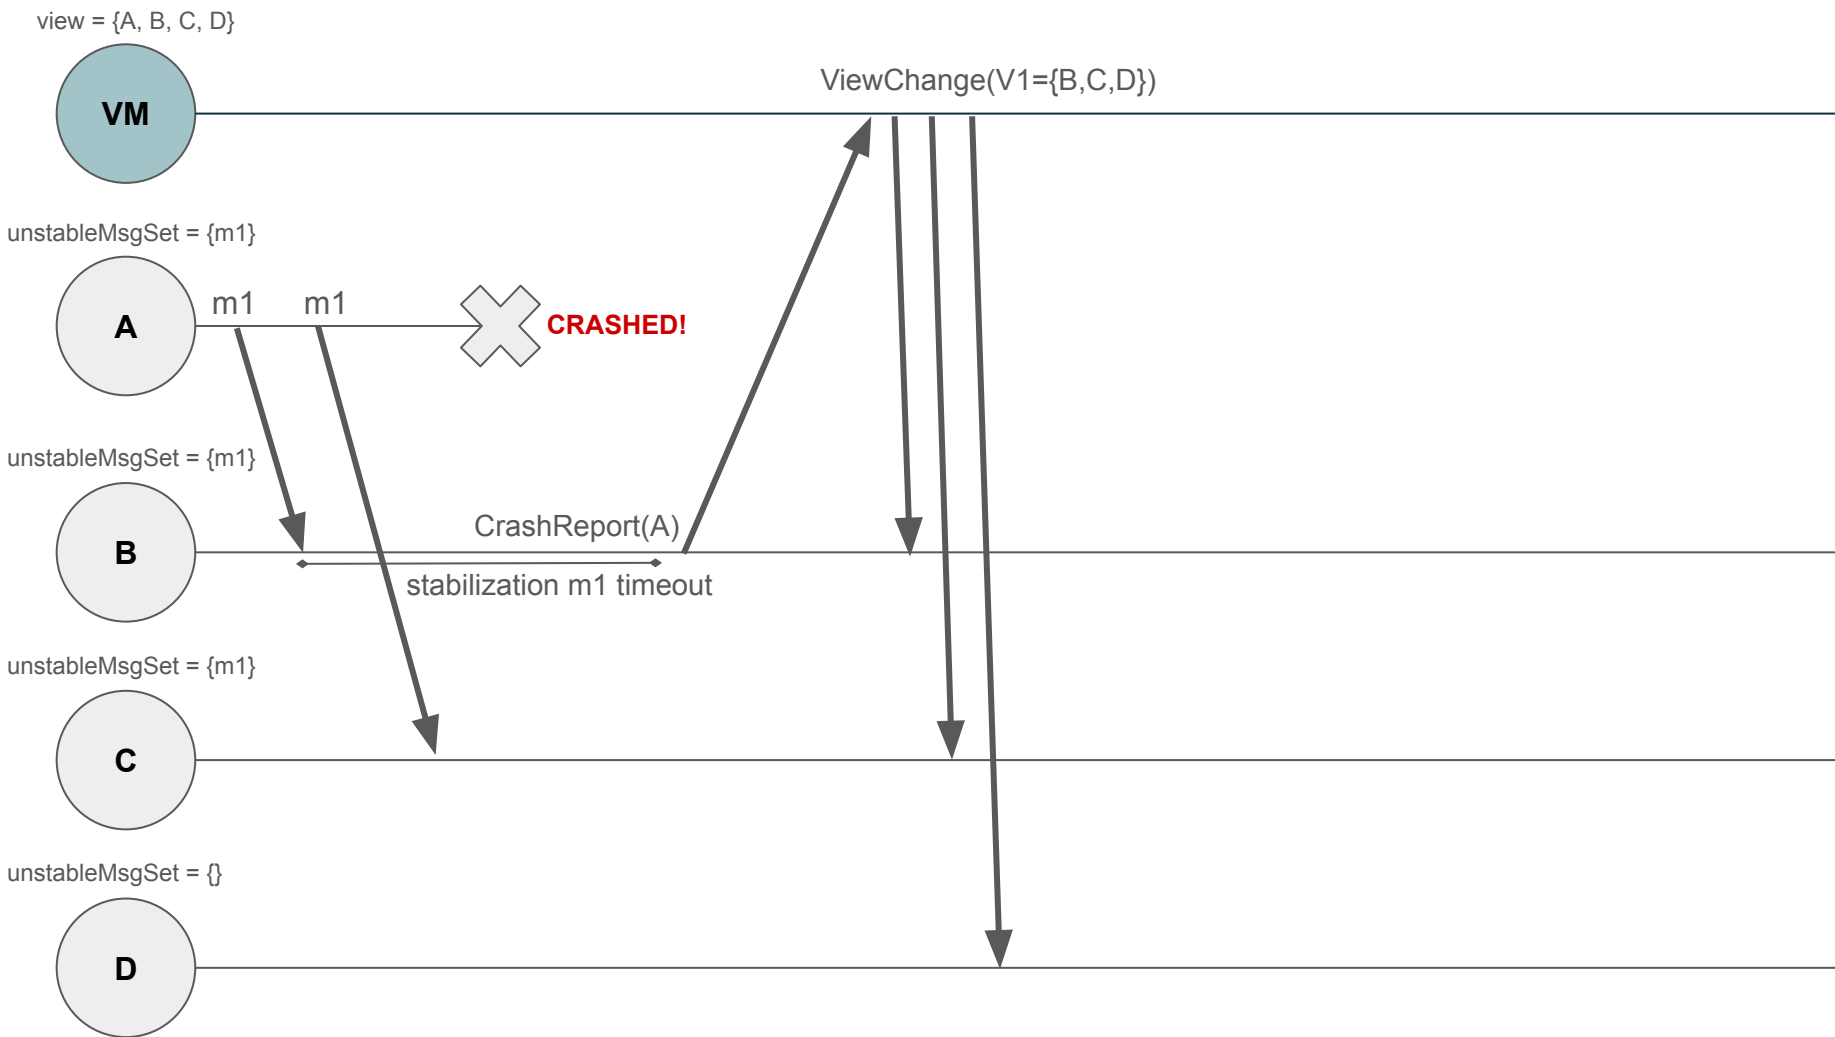


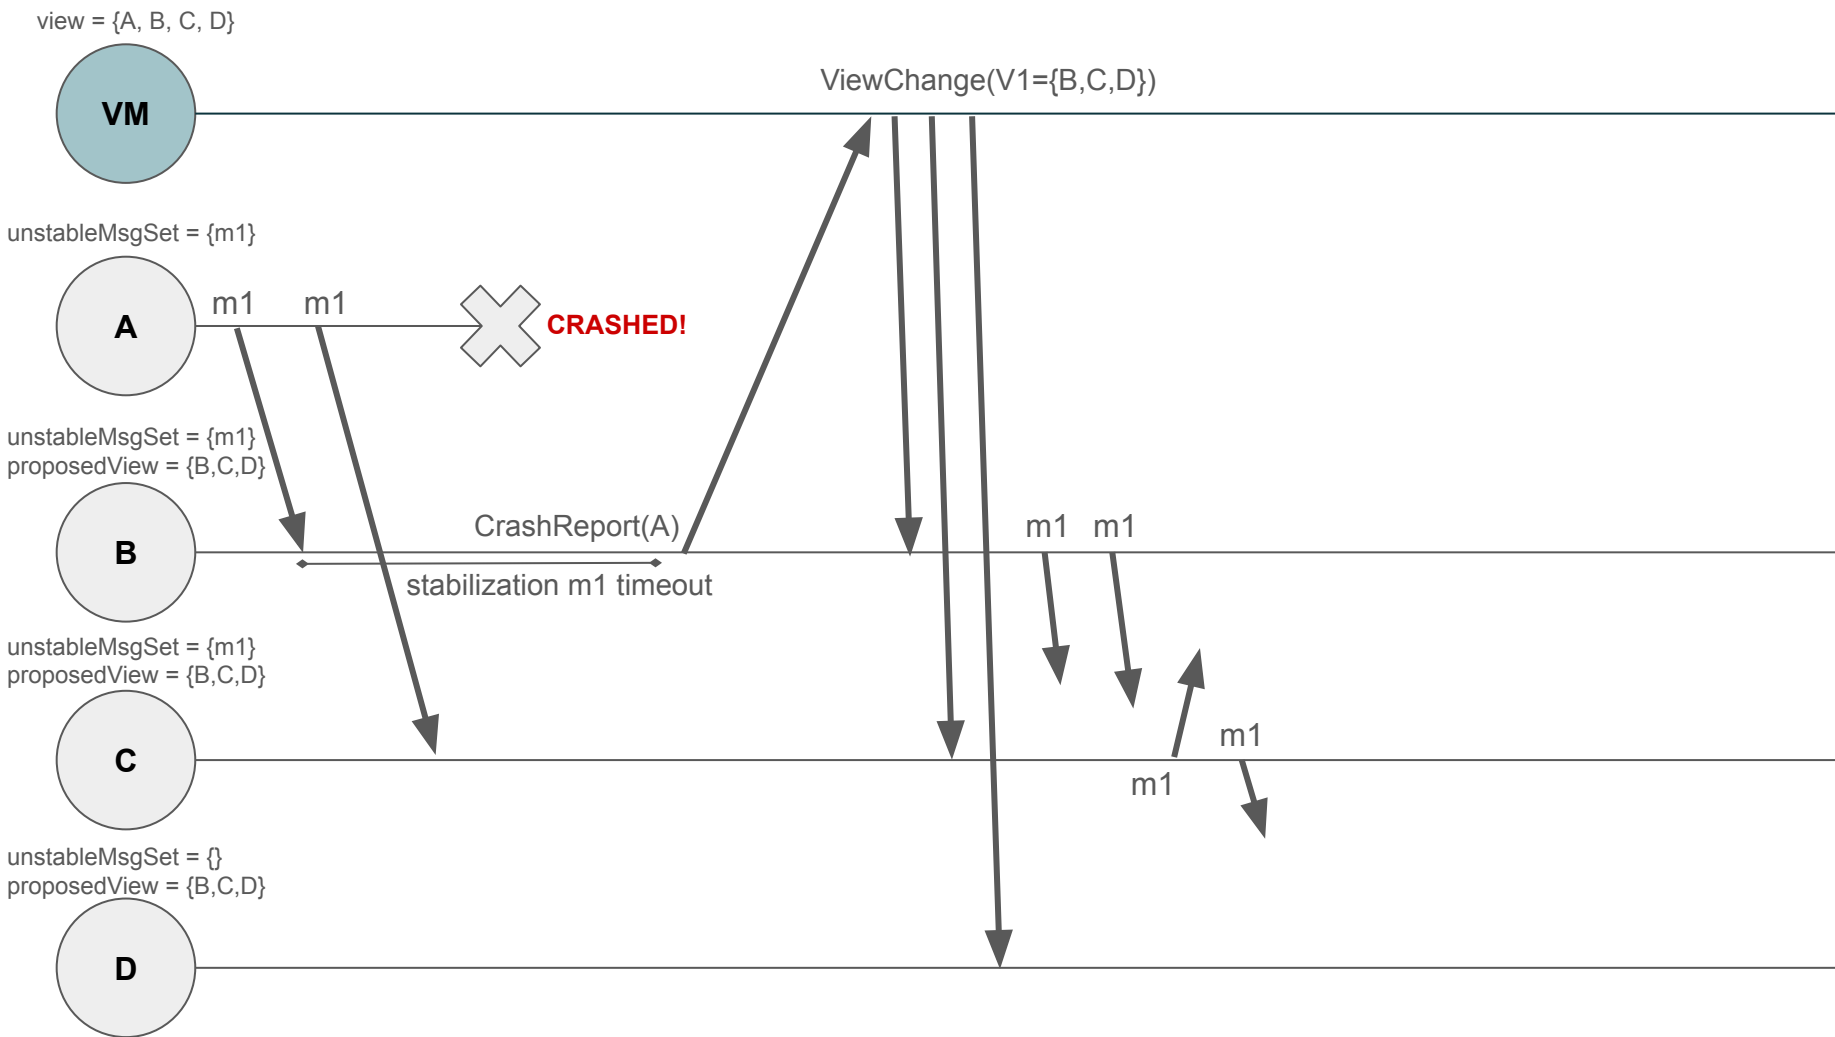


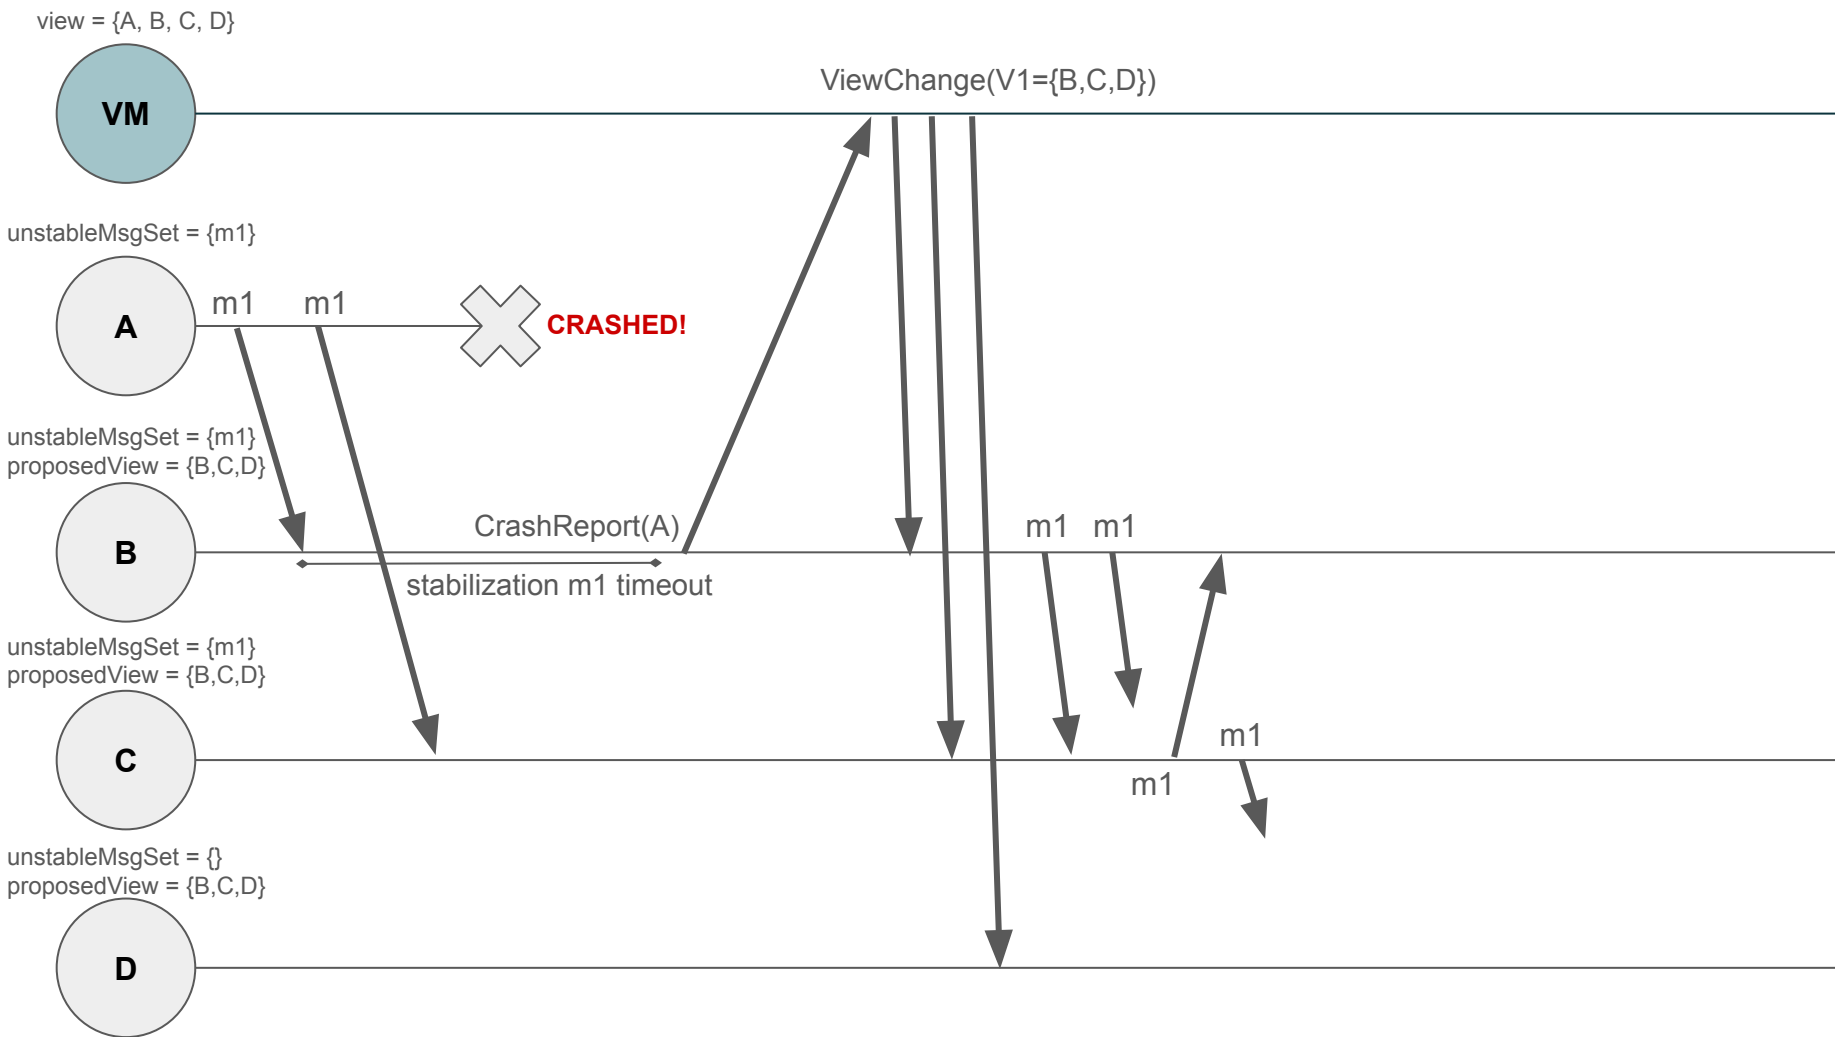


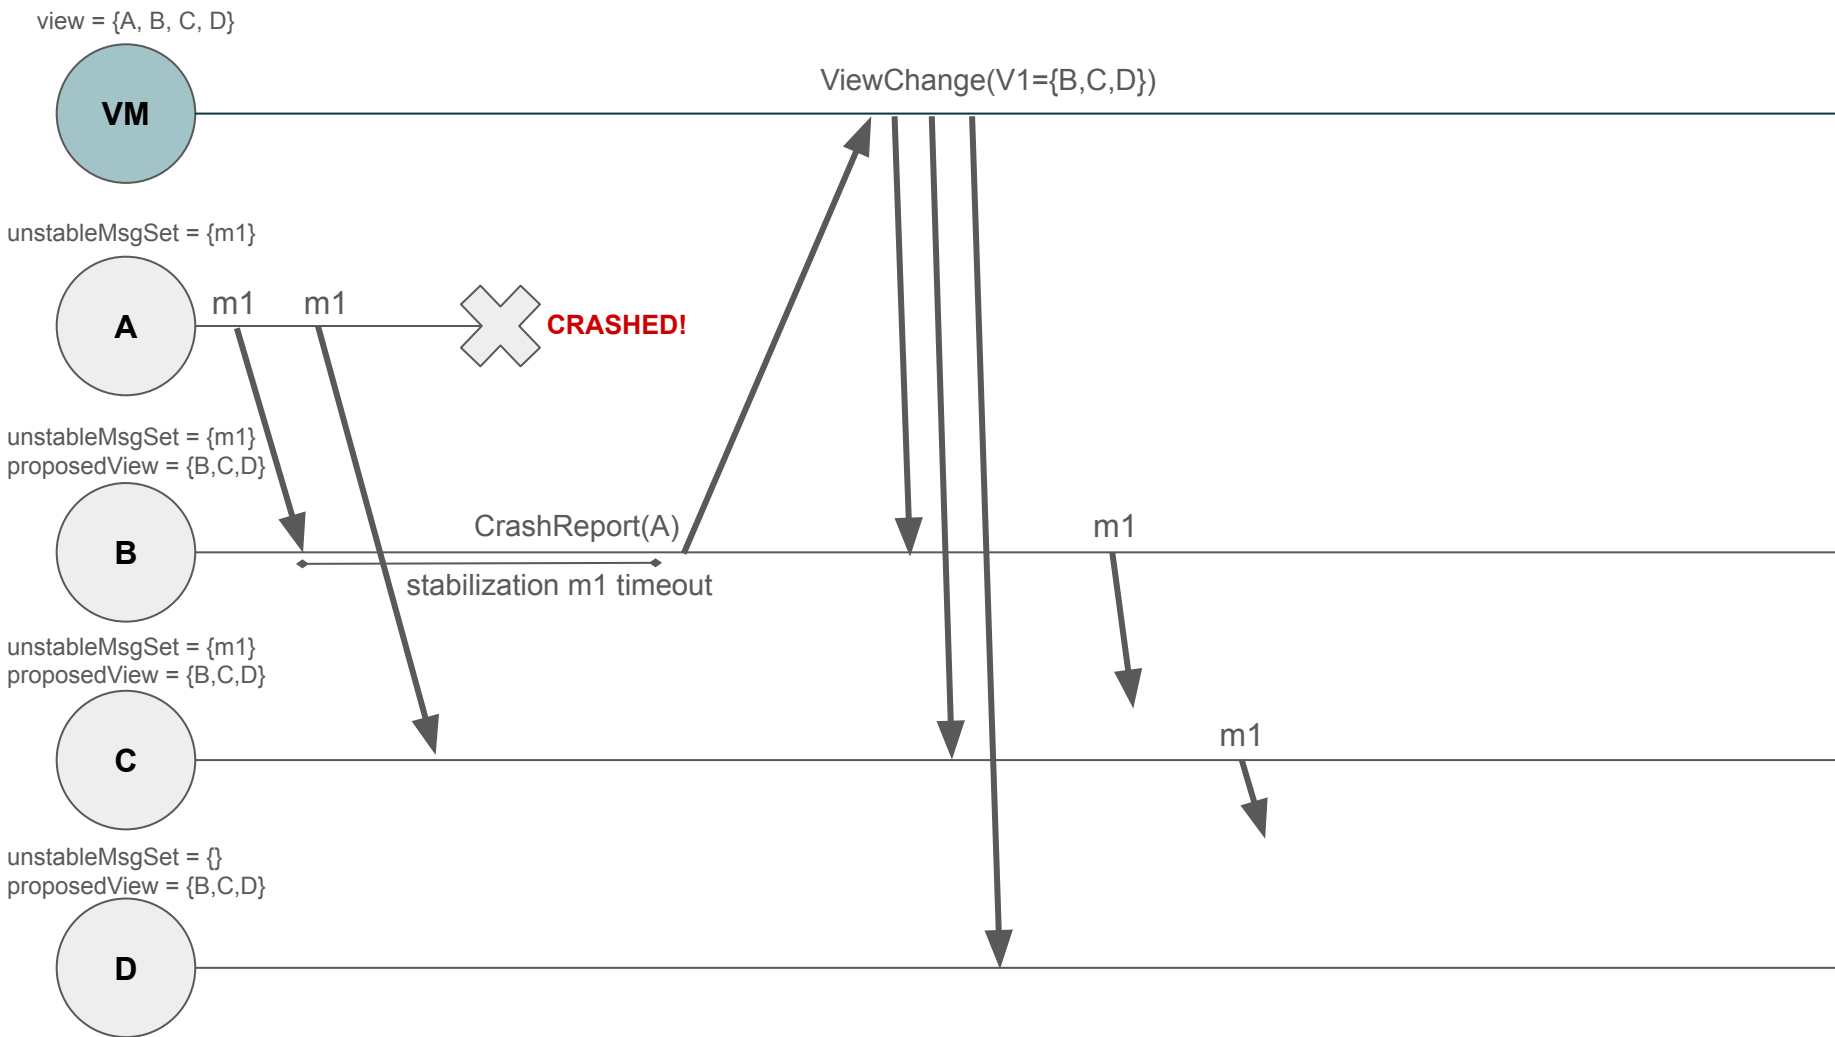


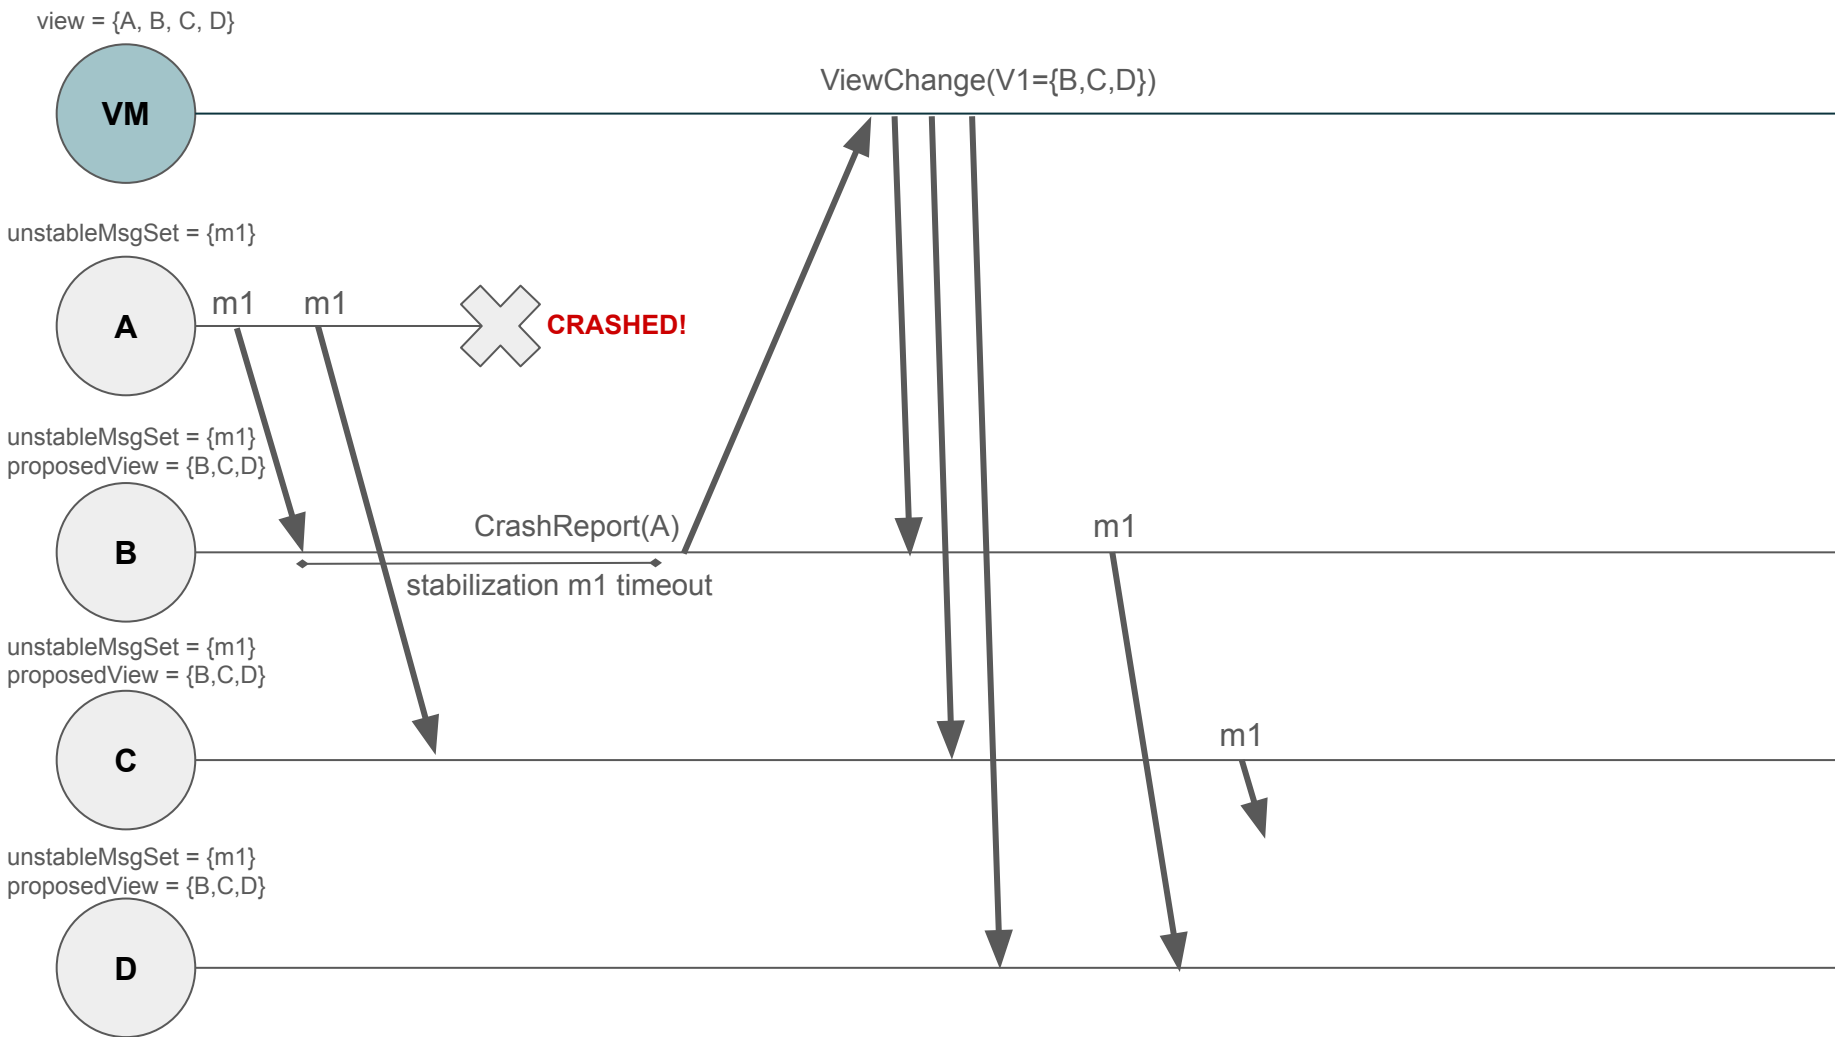


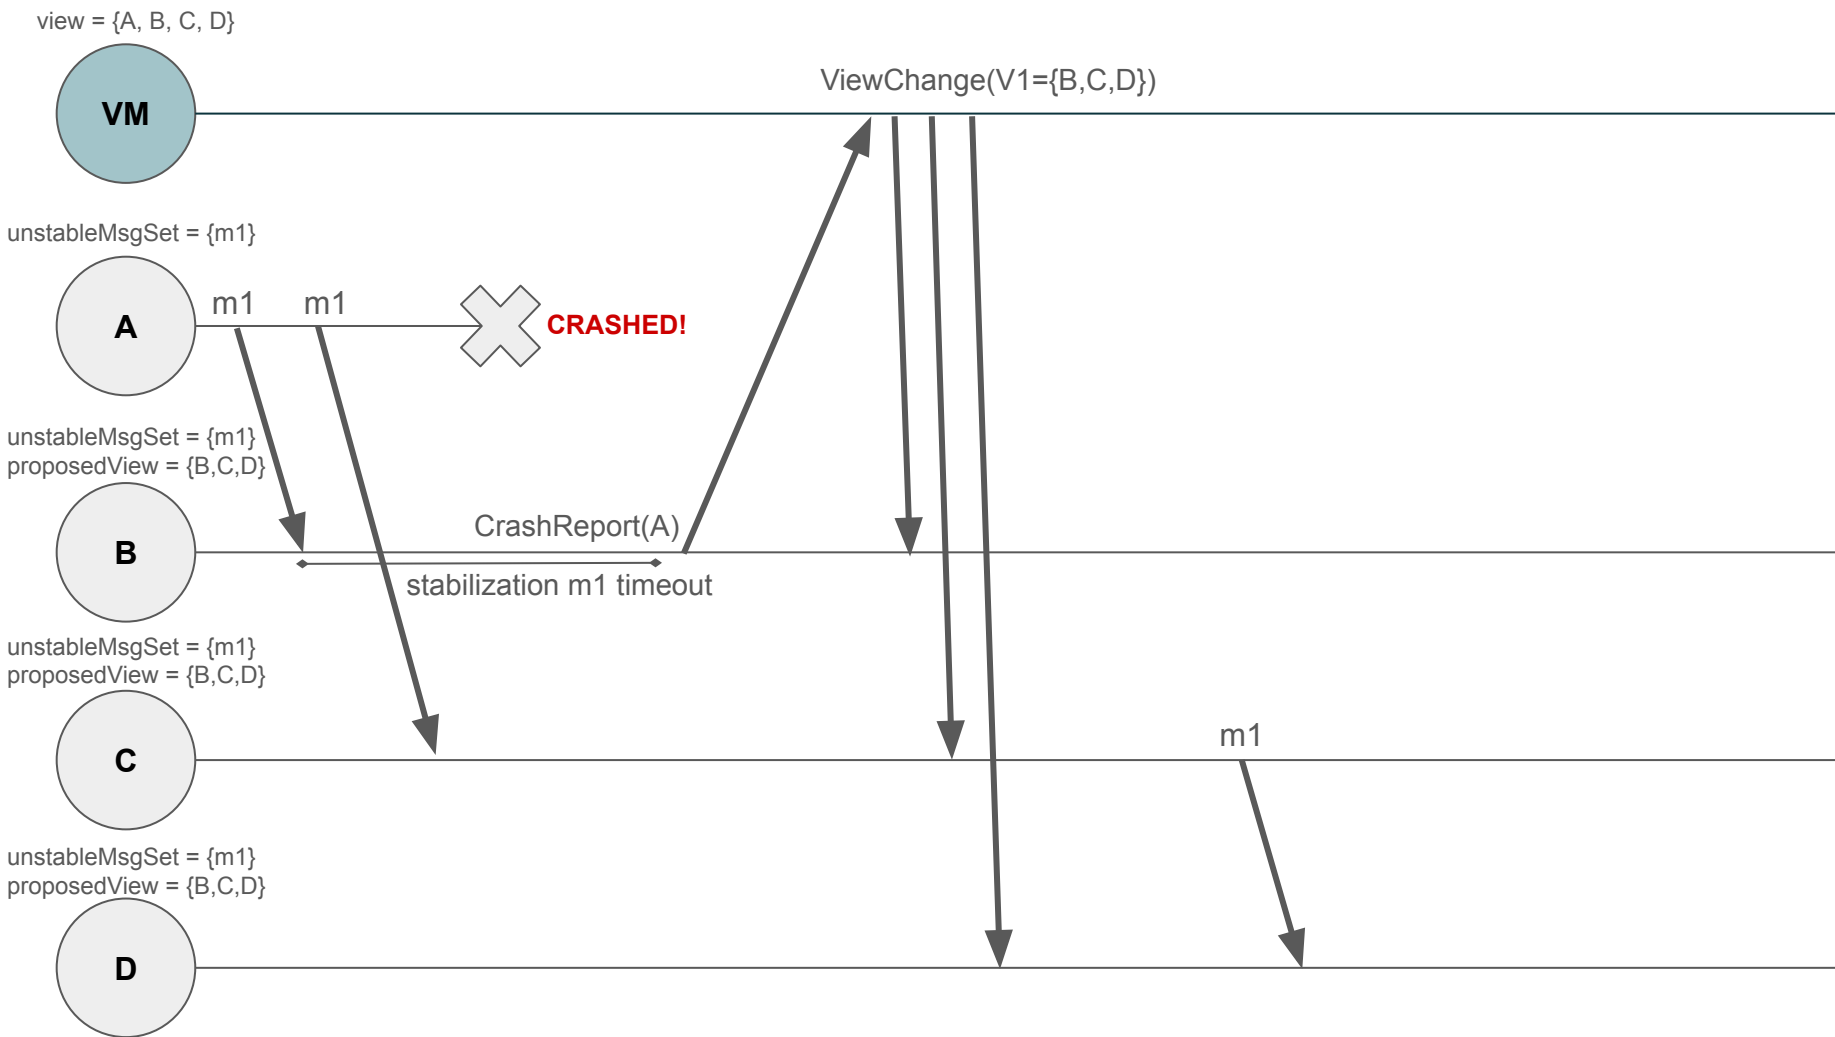


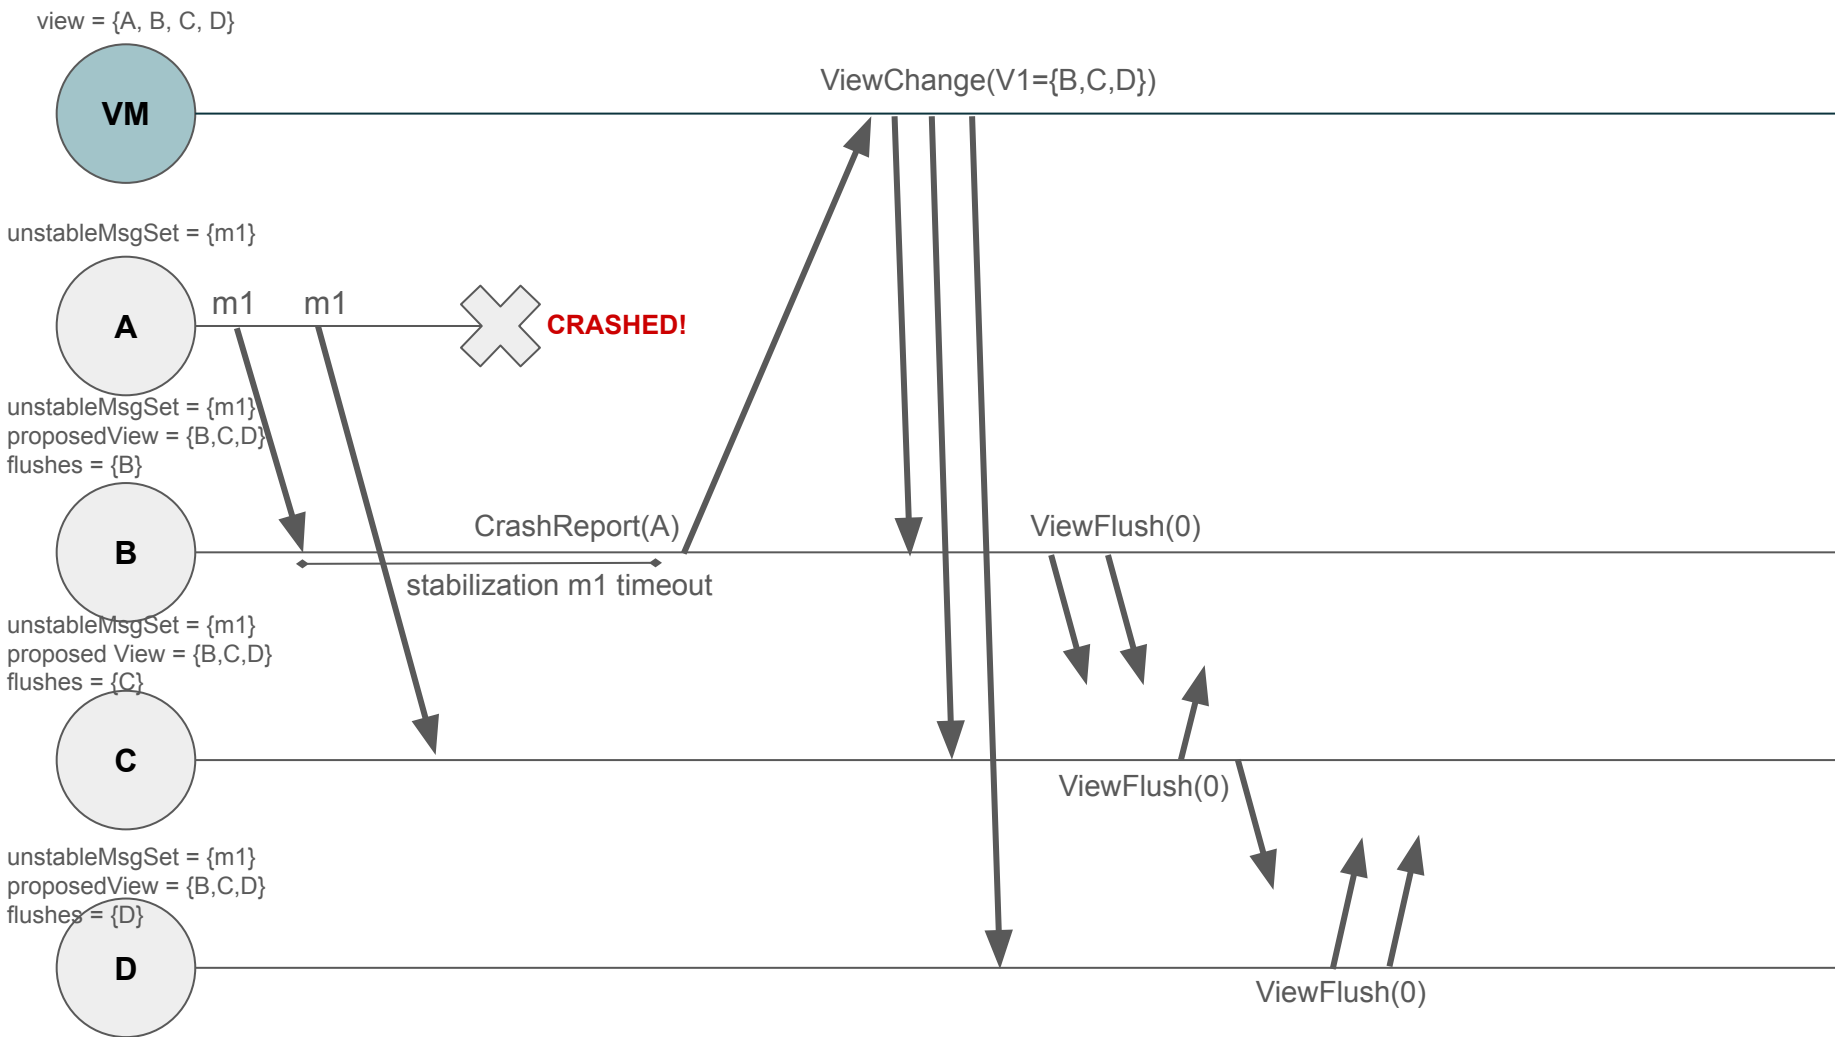


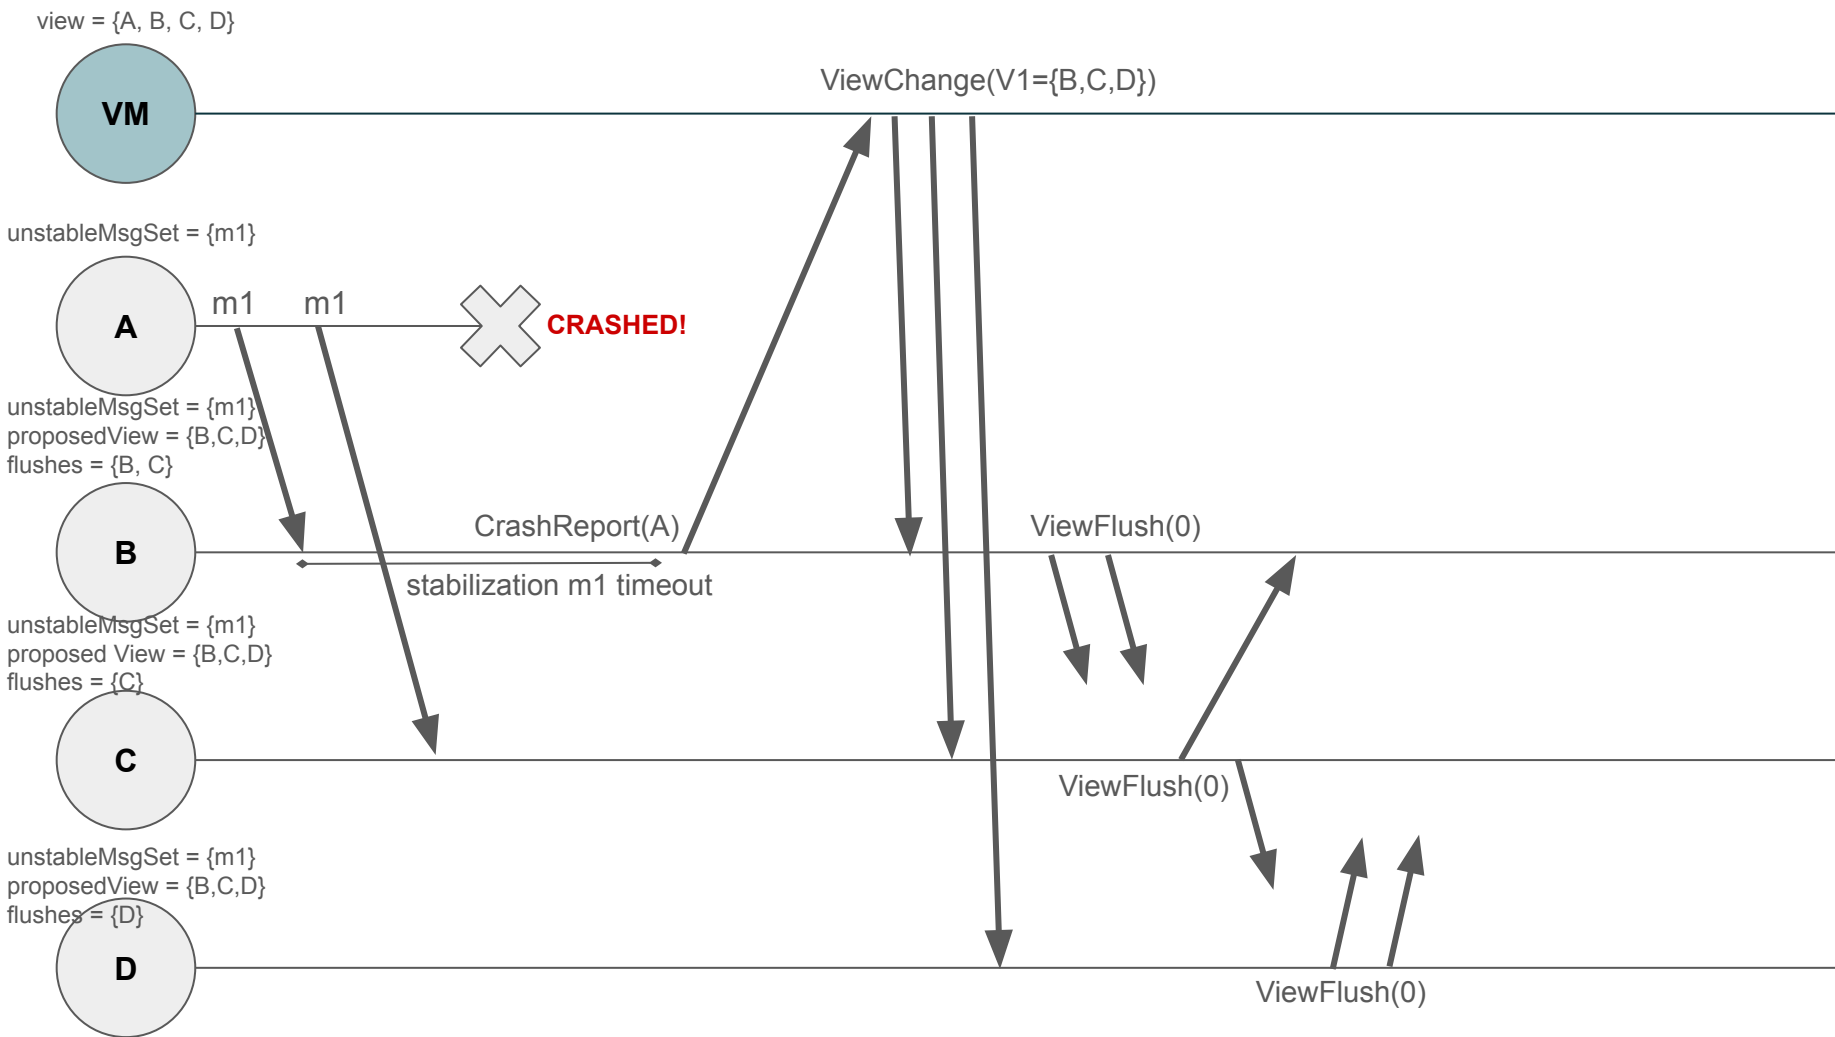


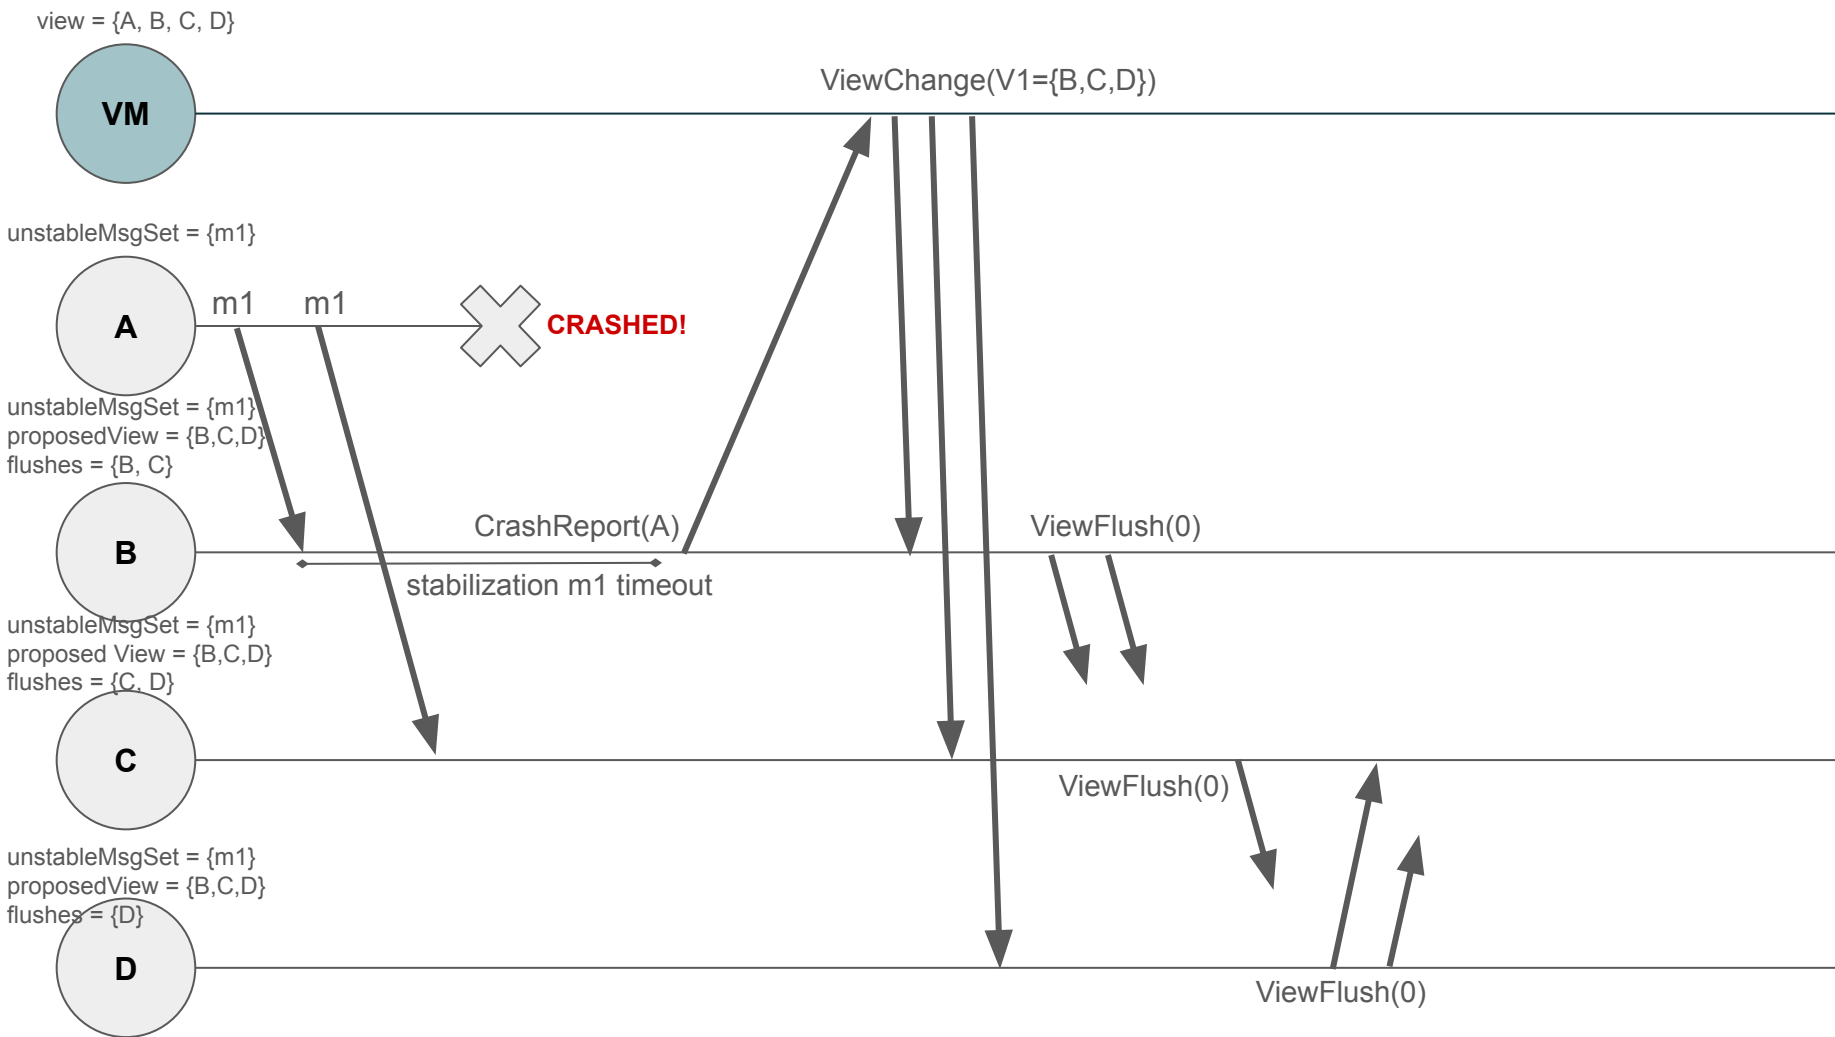


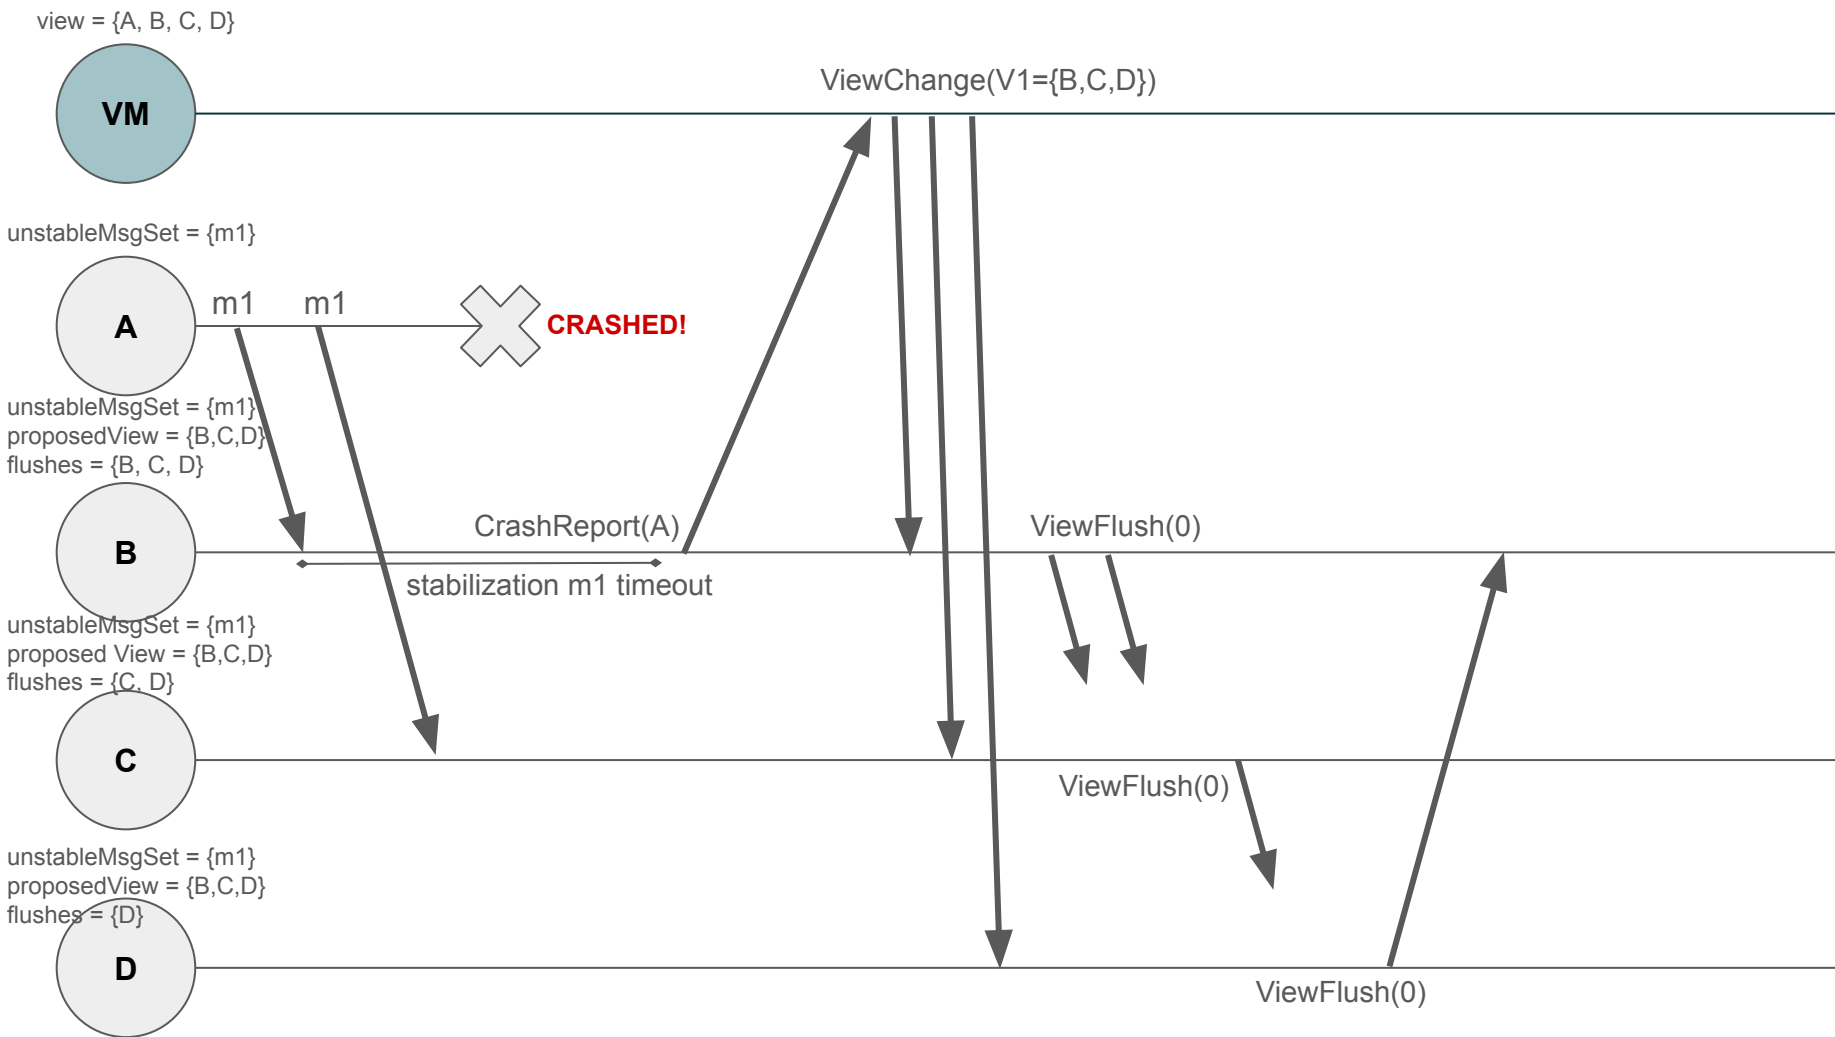


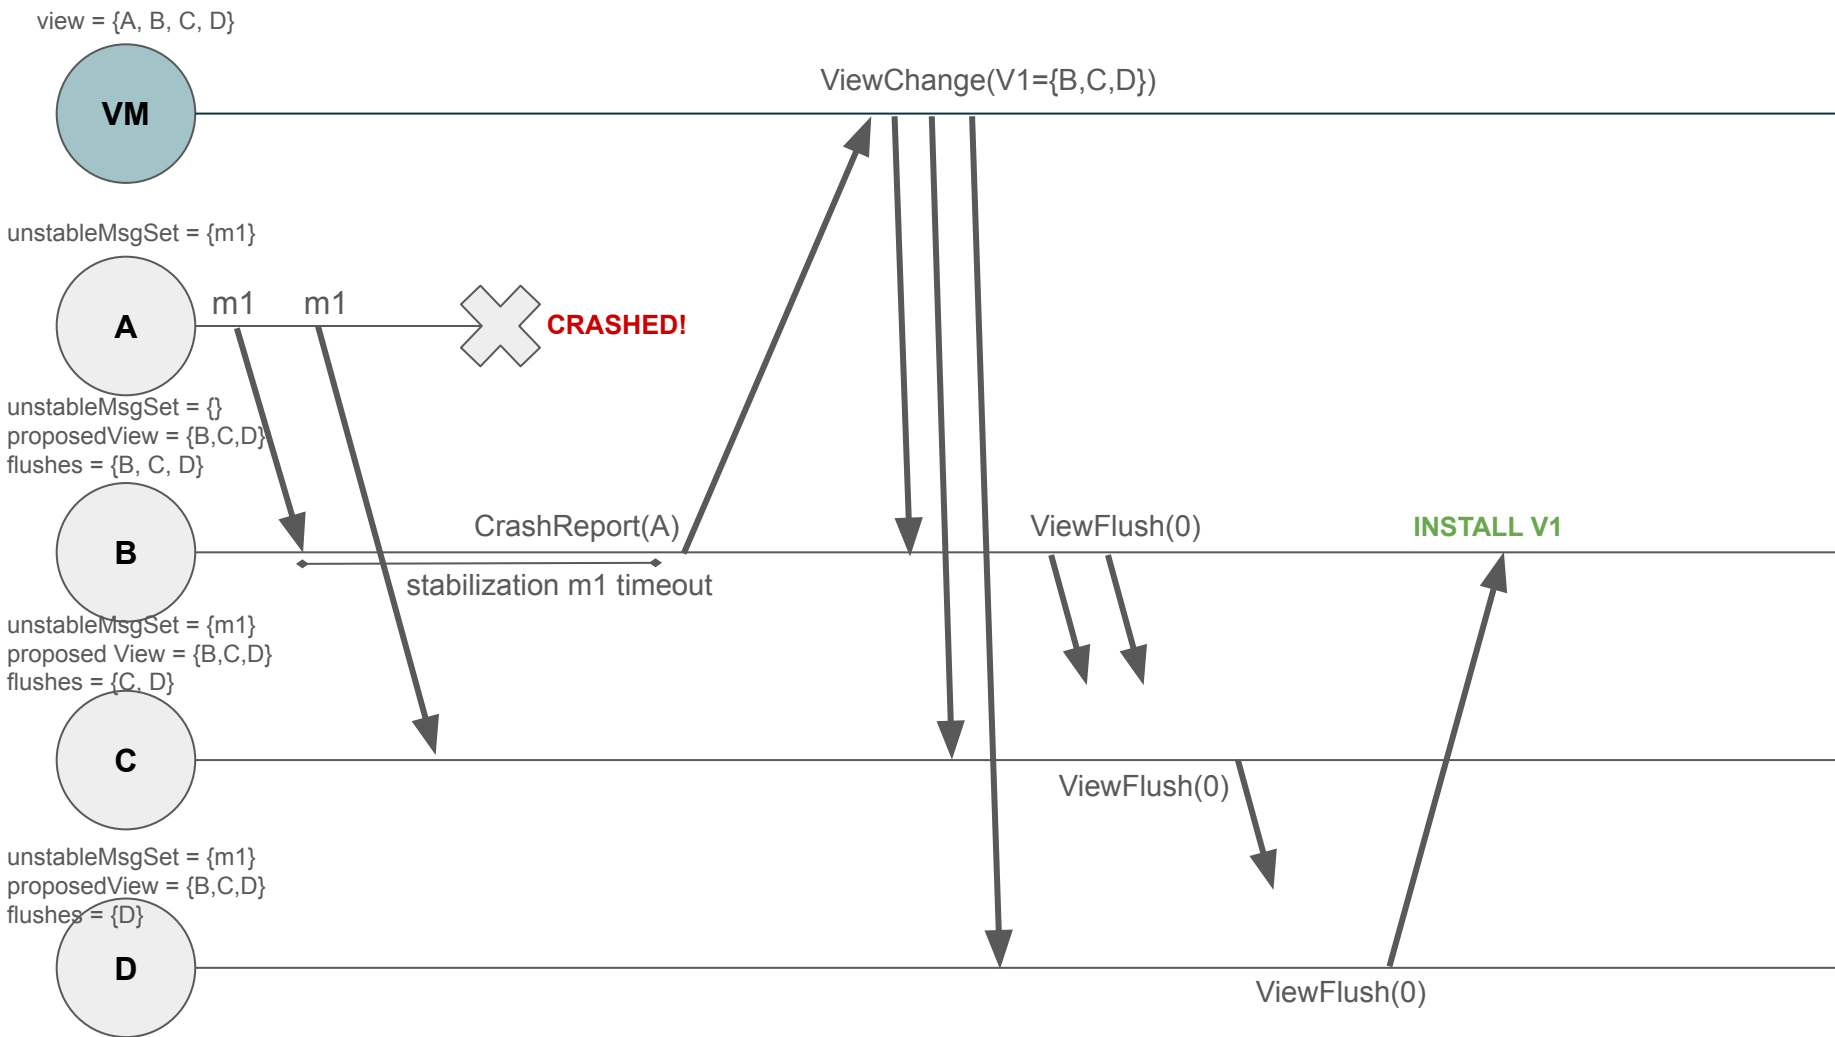

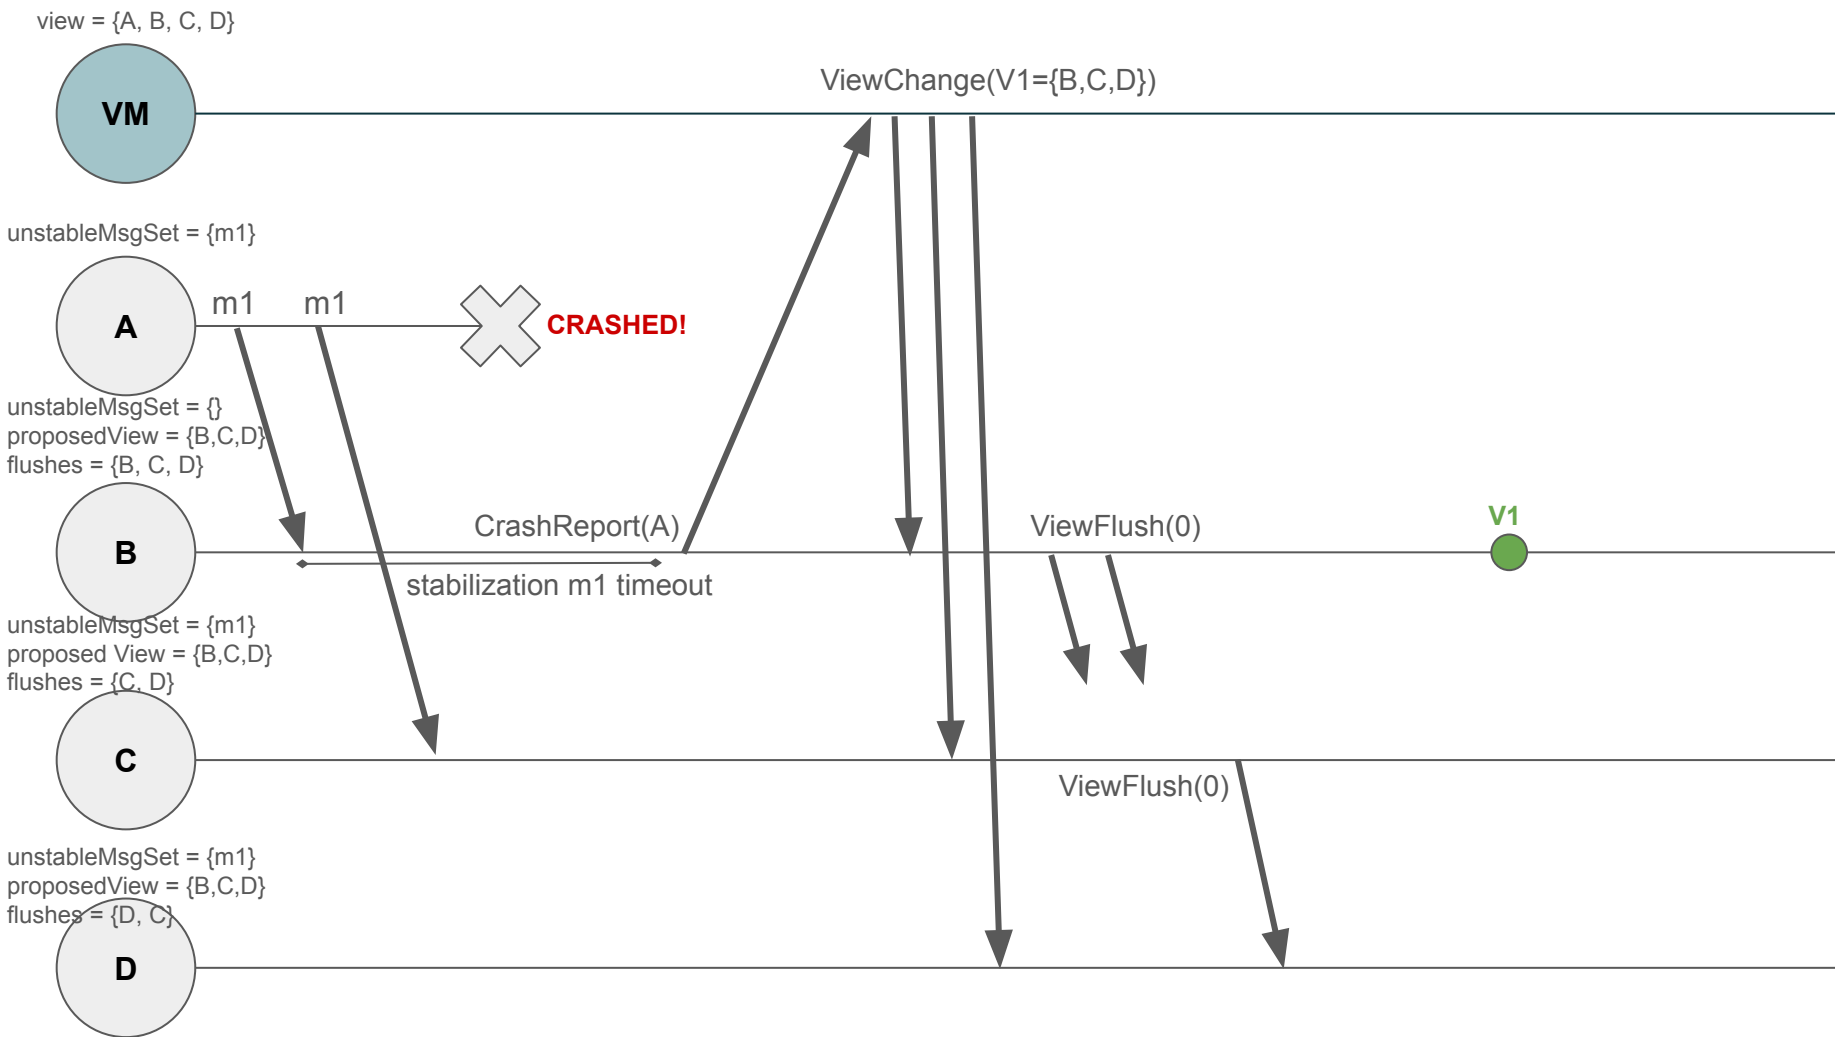

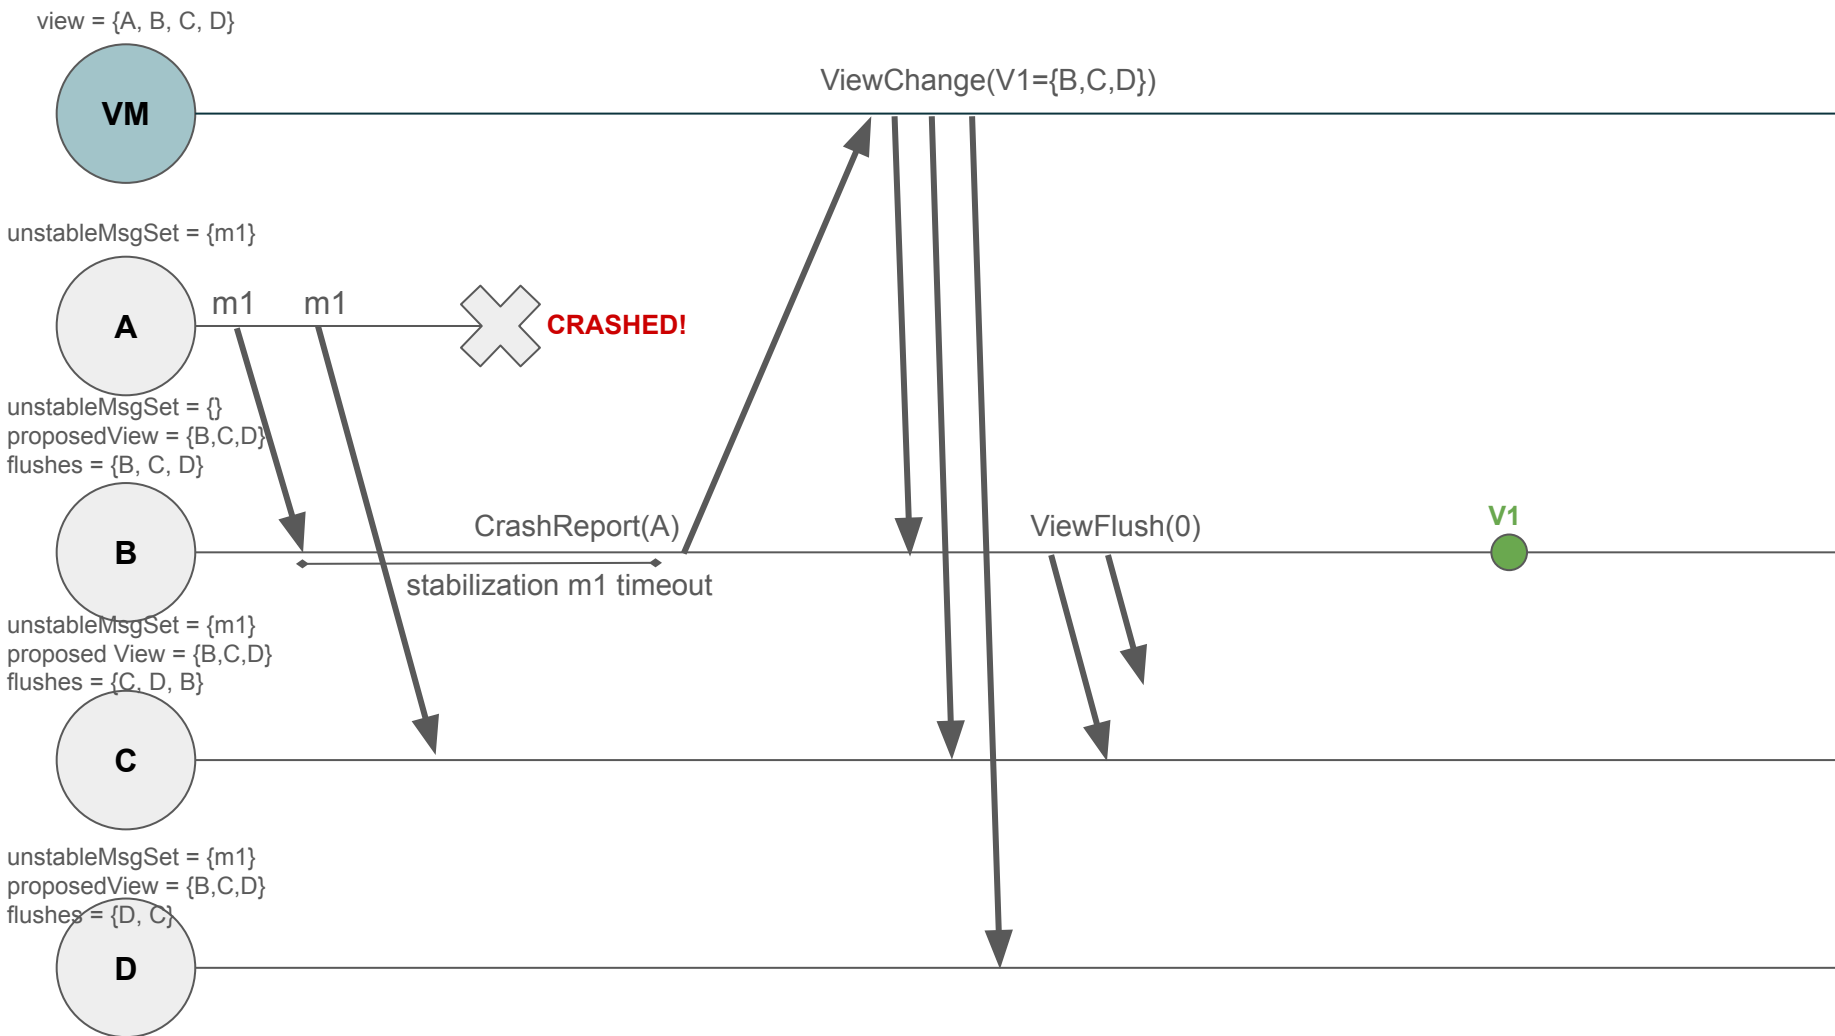

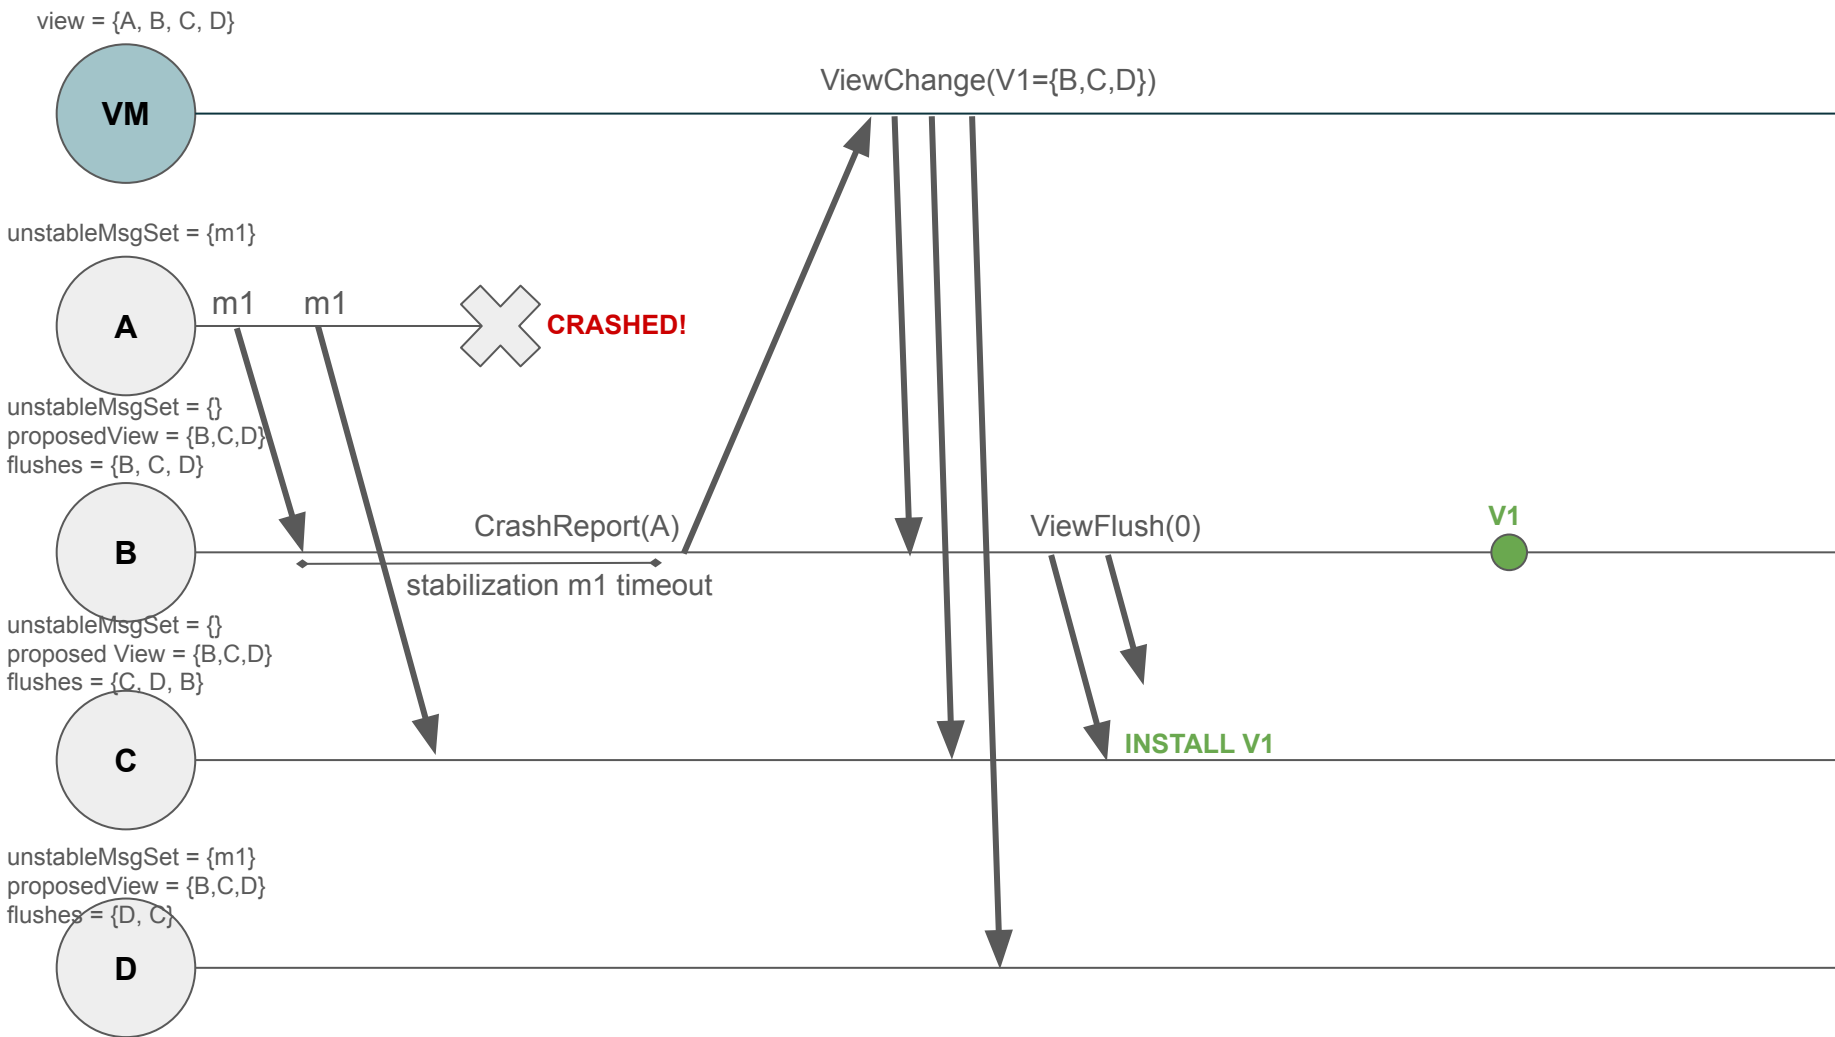

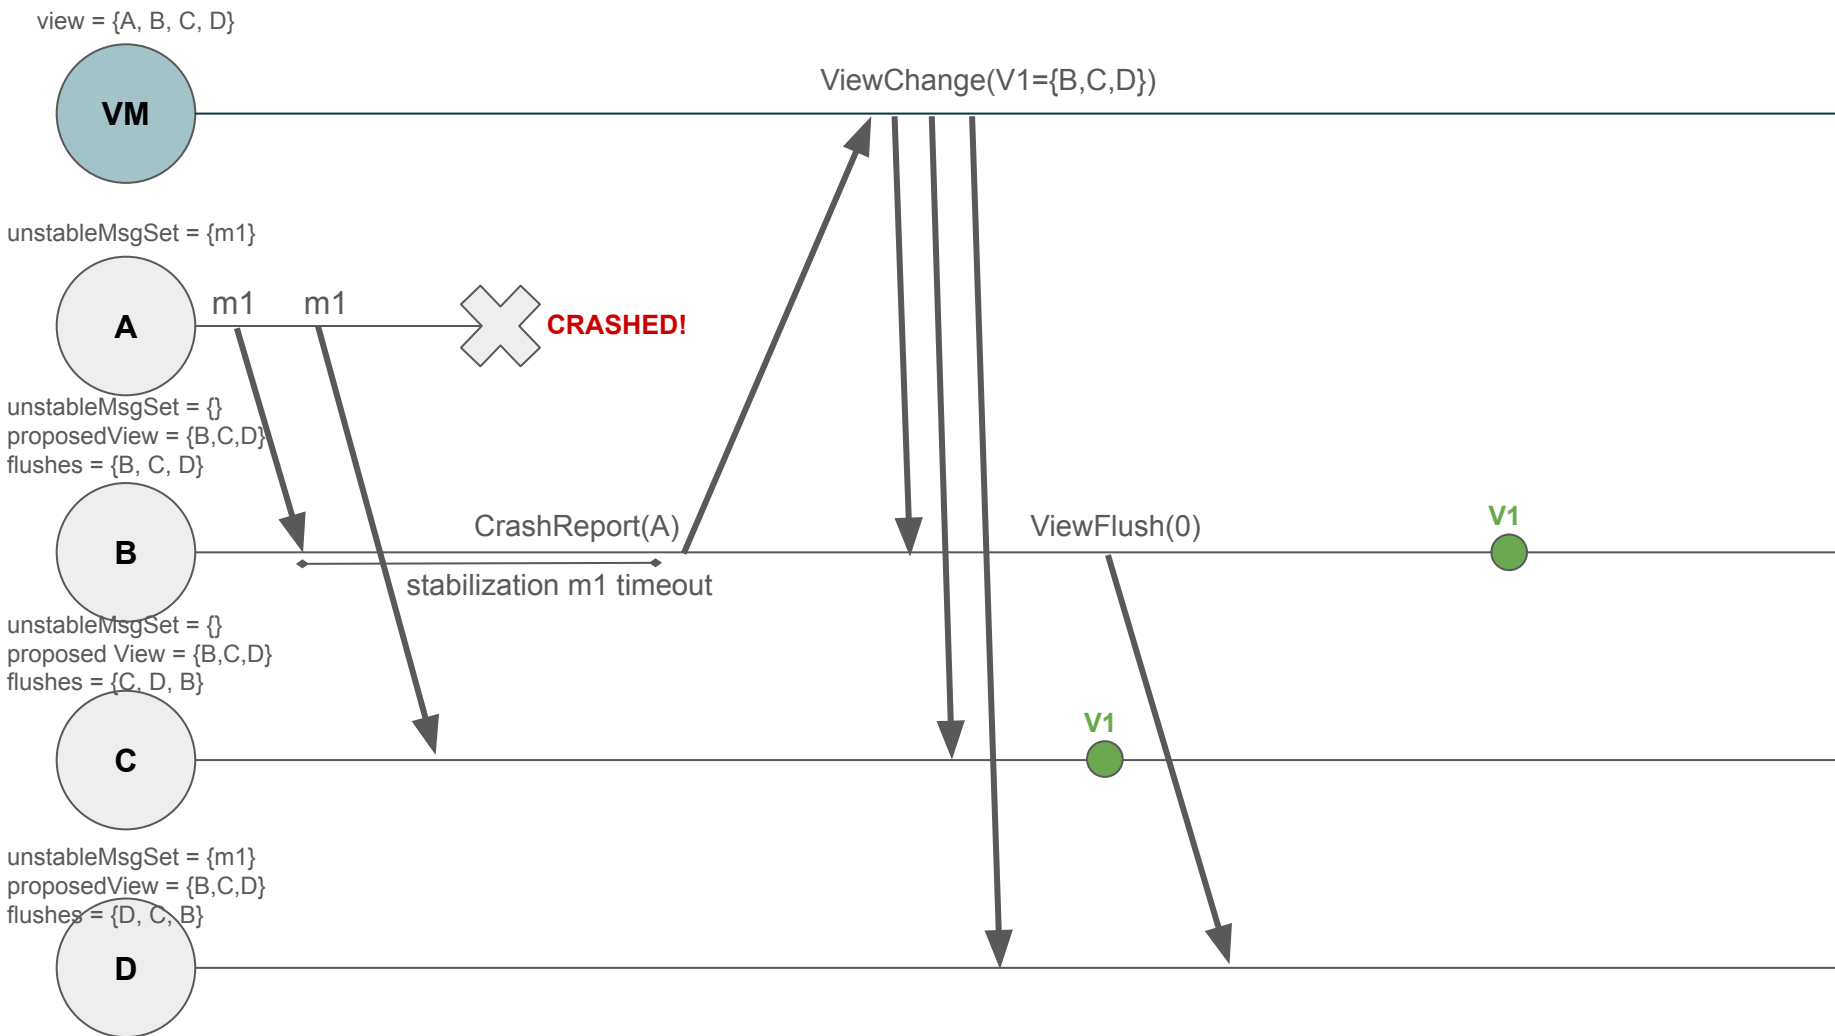



VM



m1



D



