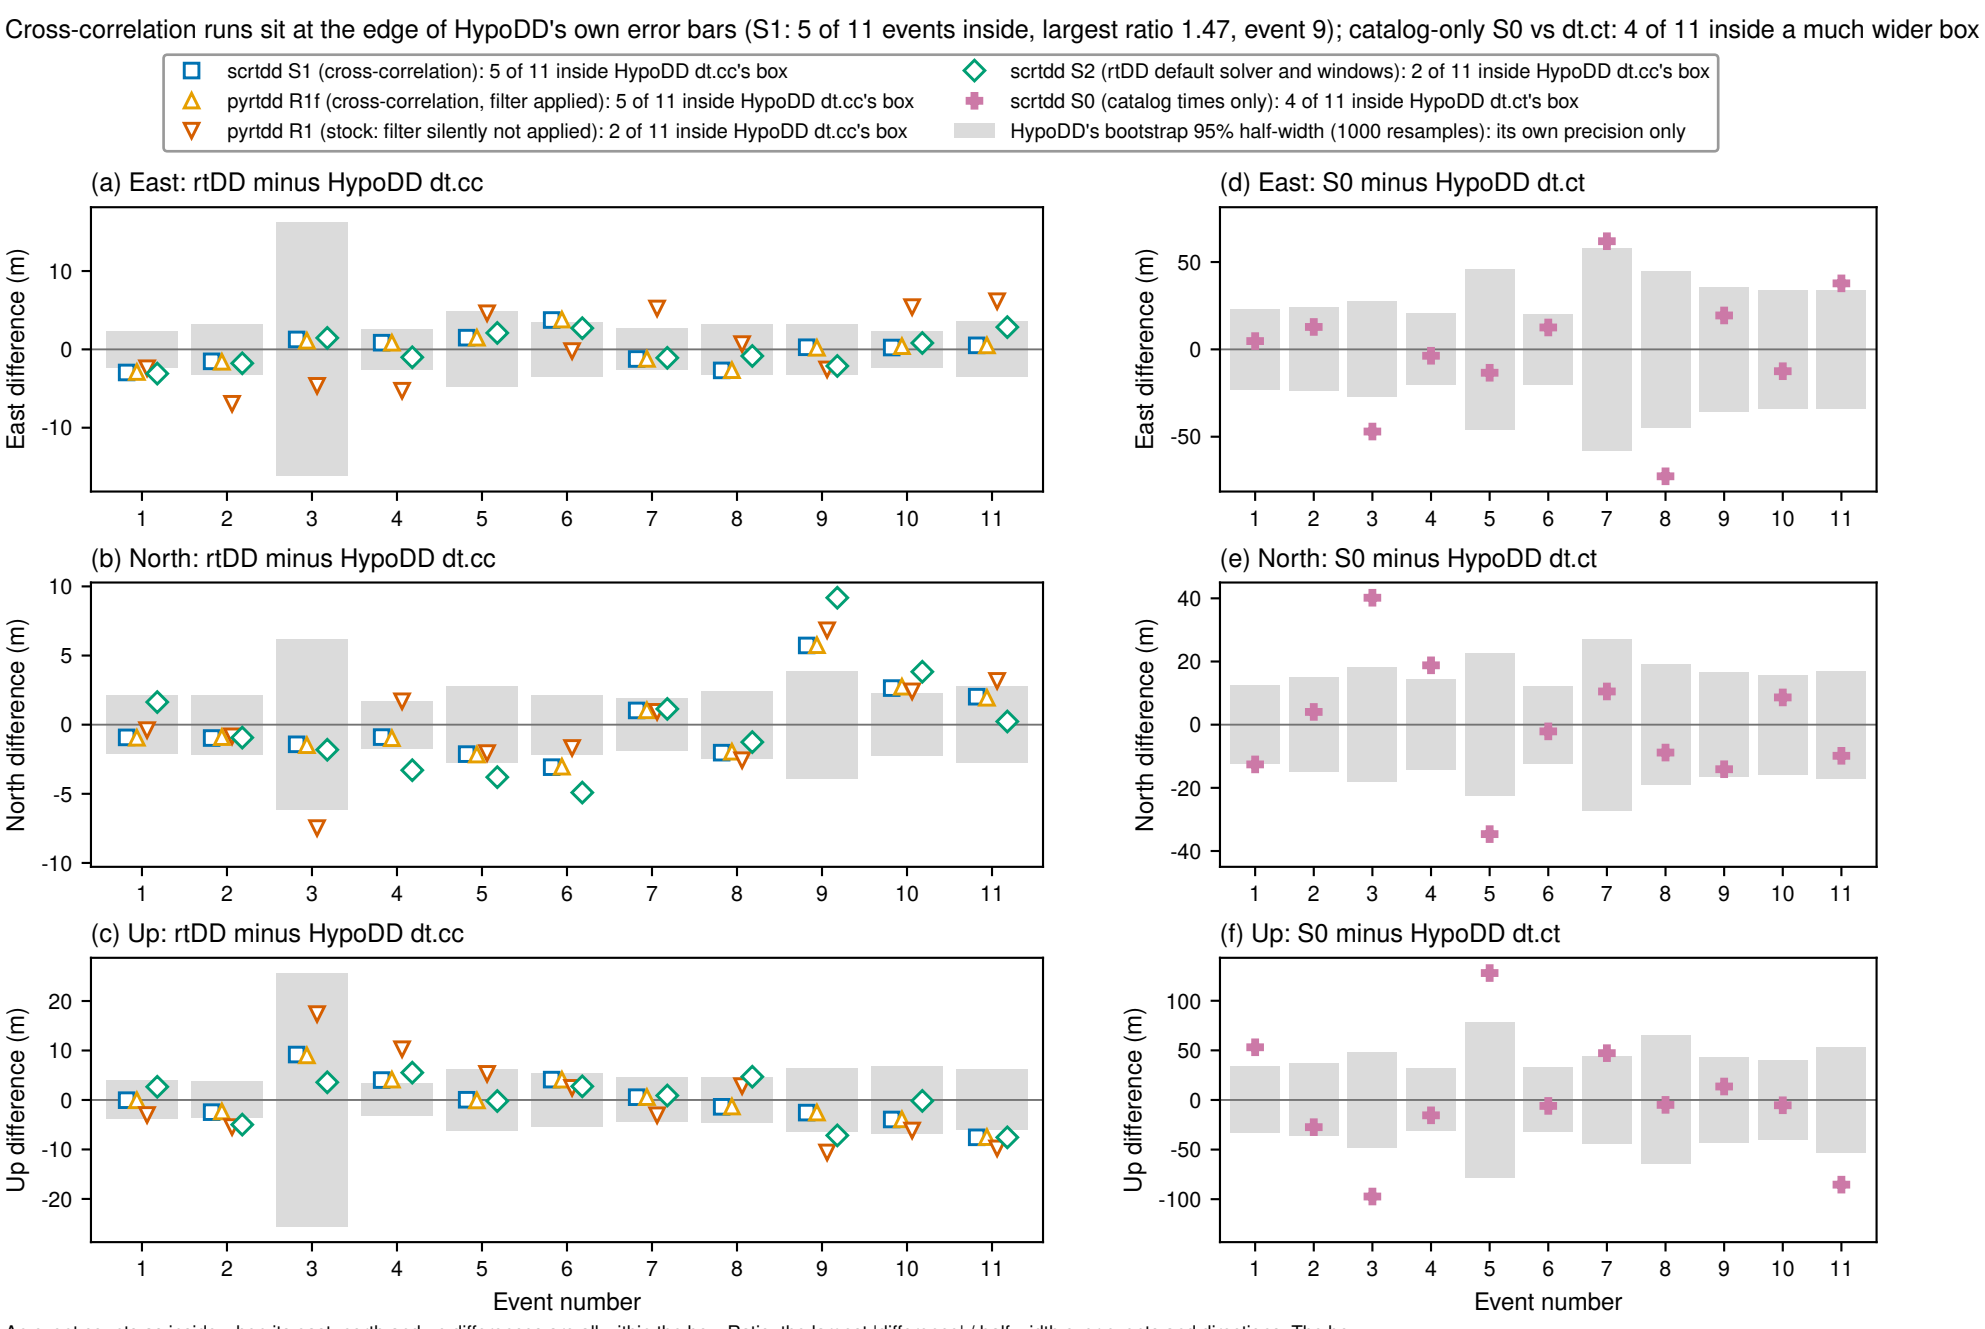
Cross-correlation runs sit at the edge of HypoDD's own error bars (S1: 5 of 11 events inside, largest ratio 1.47, event 9); catalog-only S0 vs dt.ct: 4 of 11 inside a much wider box
scrtdd S1 (cross-correlation): 5 of 11 inside HypoDD dt.cc's box
pyrtdd R1f (cross-correlation, filter applied): 5 of 11 inside HypoDD dt.cc's box
pyrtdd R1 (stock: filter silently not applied): 2 of 11 inside HypoDD dt.cc's box
scrtdd S2 (rtDD default solver and windows): 2 of 11 inside HypoDD dt.cc's box
scrtdd S0 (catalog times only): 4 of 11 inside HypoDD dt.ct's box
HypoDD's bootstrap 95% half-width (1000 resamples): its own precision only
(a) East: rtDD minus HypoDD dt.cc
East difference (m)
(b) North: rtDD minus HypoDD dt.cc
North difference (m)
(c) Up: rtDD minus HypoDD dt.cc
Up difference (m)
Event number
(d) East: S0 minus HypoDD dt.ct
East difference (m)
(e) North: S0 minus HypoDD dt.ct
North difference (m)
(f) Up: S0 minus HypoDD dt.ct
Up difference (m)
Event number
An event counts as inside when its east, north and up differences are all within the box. Ratio: the largest |difference| / half-width over events and directions. The box comes from re-running HypoDD on its own resampled data; it says nothing about how close HypoDD is to the truth.