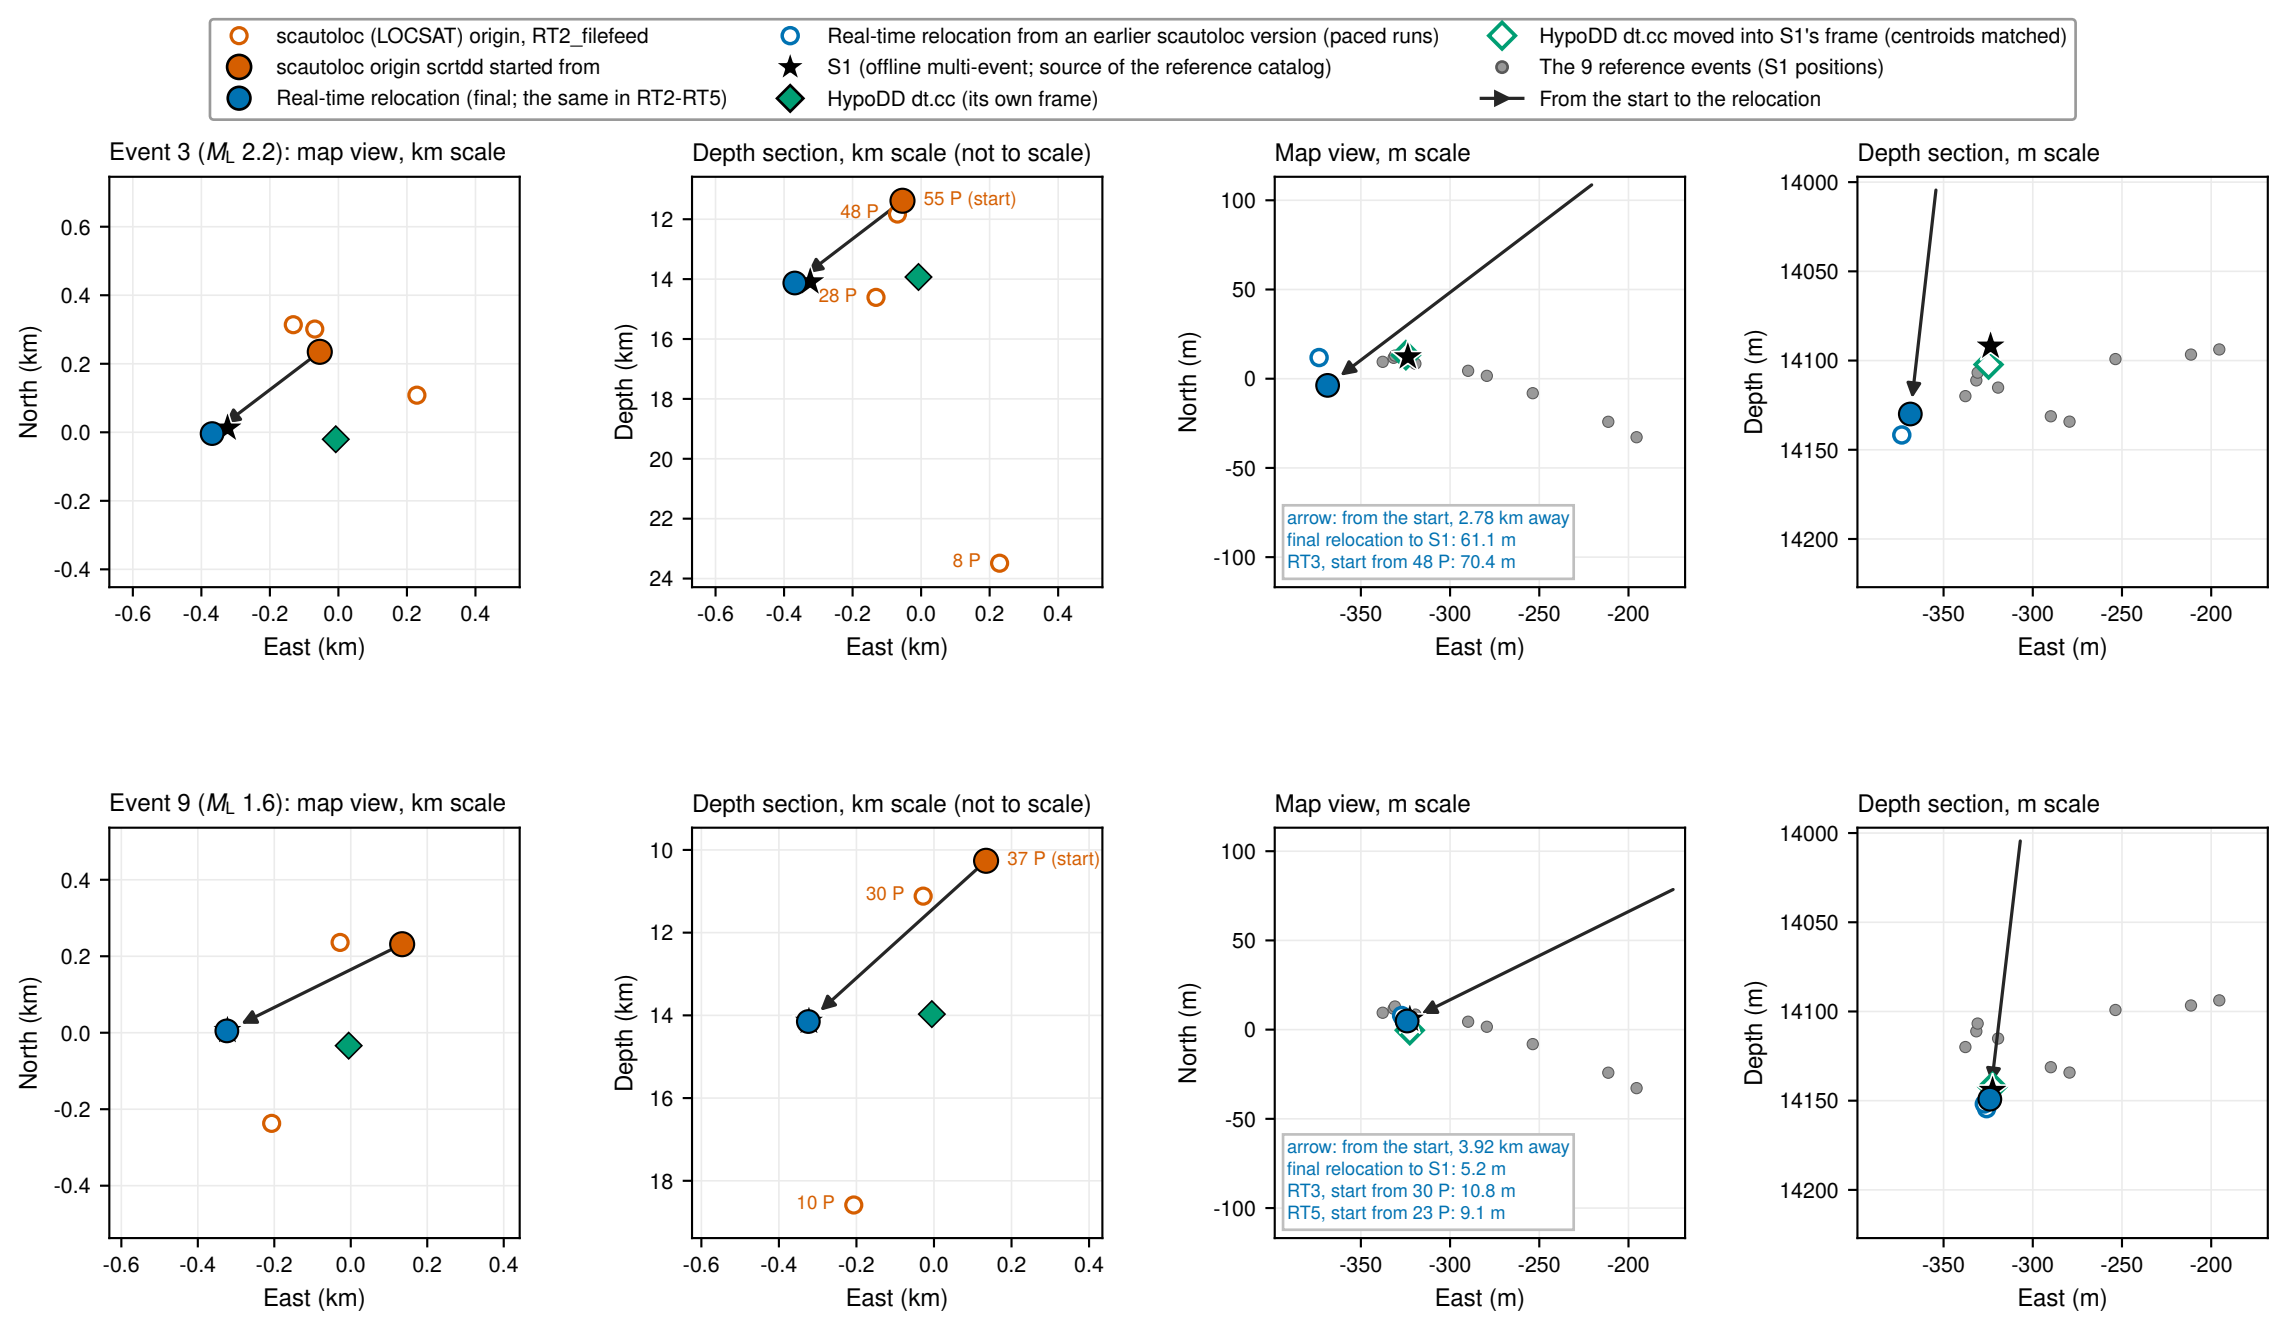
scautoloc (LOCSAT) origin, RT2_filefeed
scautoloc origin scrtdd started from
Real-time relocation (final; the same in RT2-RT5)
Real-time relocation from an earlier scautoloc version (paced runs)
S1 (offline multi-event; source of the reference catalog)
HypoDD dt.cc (its own frame)
HypoDD dt.cc moved into S1's frame (centroids matched)
The 9 reference events (S1 positions)
From the start to the relocation
Event 3 (M_L 2.2): map view, km scale
Depth section, km scale (not to scale)
Map view, m scale
Depth section, m scale
48 P
55 P (start)
28 P
8 P
arrow: from the start, 2.78 km away
final relocation to S1: 61.1 m
RT3, start from 48 P: 70.4 m
Event 9 (M_L 1.6): map view, km scale
Depth section, km scale (not to scale)
Map view, m scale
Depth section, m scale
30 P
37 P (start)
10 P
arrow: from the start, 3.92 km away
final relocation to S1: 5.2 m
RT3, start from 30 P: 10.8 m
RT5, start from 23 P: 9.1 m
North (km)
East (km)
Depth (km)
North (m)
East (m)
Depth (m)