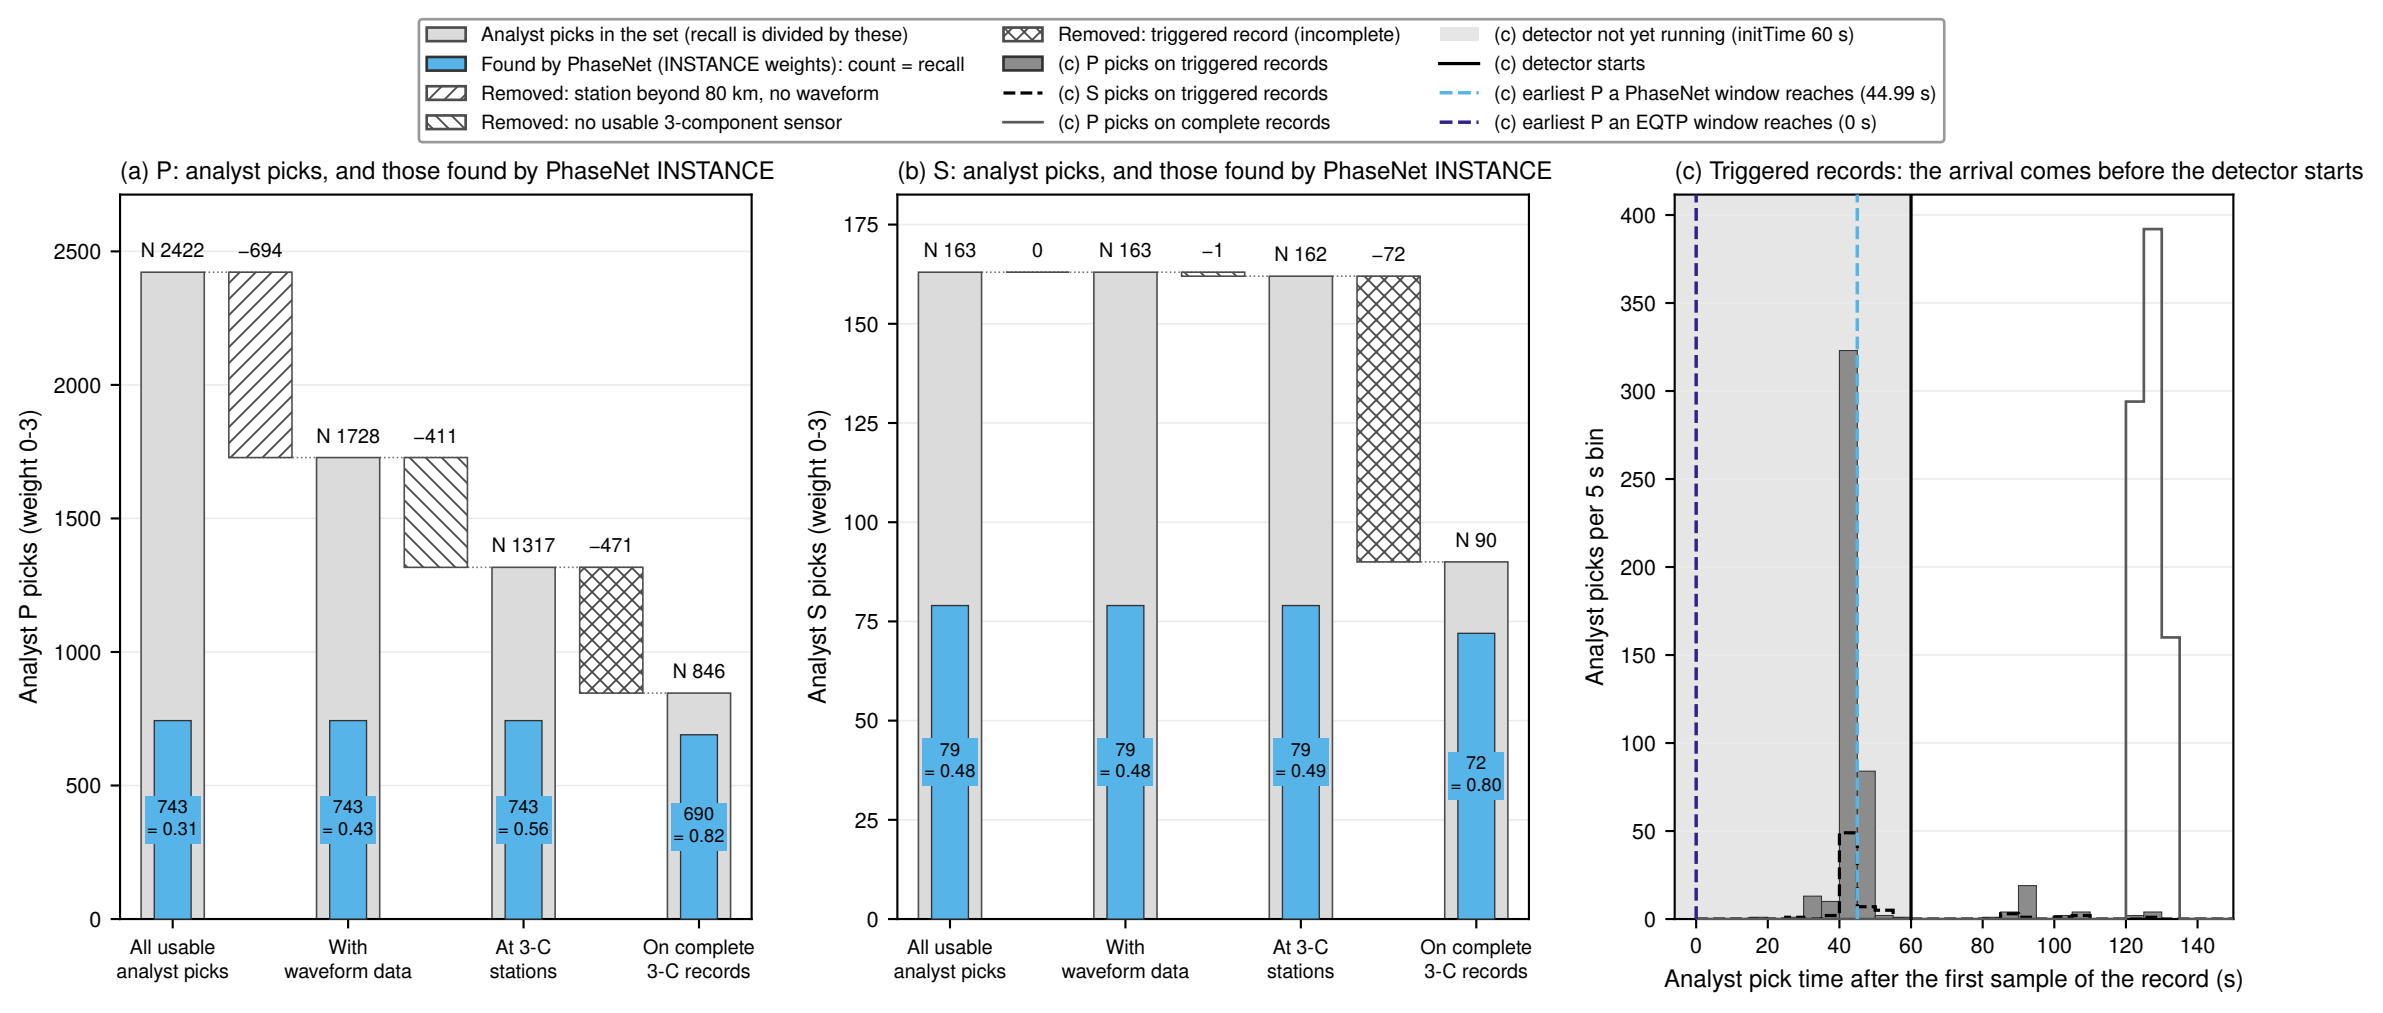
Analyst picks in the set (recall is divided by these)
Found by PhaseNet (INSTANCE weights): count = recall
Removed: station beyond 80 km, no waveform
Removed: no usable 3-component sensor
Removed: triggered record (incomplete)
(c) P picks on triggered records
(c) S picks on triggered records
(c) P picks on complete records
(c) detector not yet running (initTime 60 s)
(c) detector starts
(c) earliest P a PhaseNet window reaches (44.99 s)
(c) earliest P an EQTP window reaches (0 s)
(a) P: analyst picks, and those found by PhaseNet INSTANCE
Analyst P picks (weight 0-3)
N 2422
−694
N 1728
−411
N 1317
−471
N 846
743 = 0.31
743 = 0.43
743 = 0.56
690 = 0.82
All usable analyst picks
With waveform data
At 3-C stations
On complete 3-C records
(b) S: analyst picks, and those found by PhaseNet INSTANCE
Analyst S picks (weight 0-3)
N 163
0
N 163
−1
N 162
−72
N 90
79 = 0.48
79 = 0.48
79 = 0.49
72 = 0.80
(c) Triggered records: the arrival comes before the detector starts
Analyst picks per 5 s bin
Analyst pick time after the first sample of the record (s)