

# Reproducible Documents with `{ rmarkdown }`

## Day 2

Instructor: **Selina Baldauf**

Freie Universität Berlin - Theoretical Ecology




2022-22-03 (updated: 2022-03-28)

# Topics today

- Citations
- A bit more output formats
  - `html_document`
  - `pdf_document`
  - `word_document`
- Make tables look nice
- Some more tips and good practice

# The visual editor in RStudio

- WYSIWYG editor (*What you see is what you get*)
  - More similar to Word etc. but with less functionality
- Click on the button on the top right

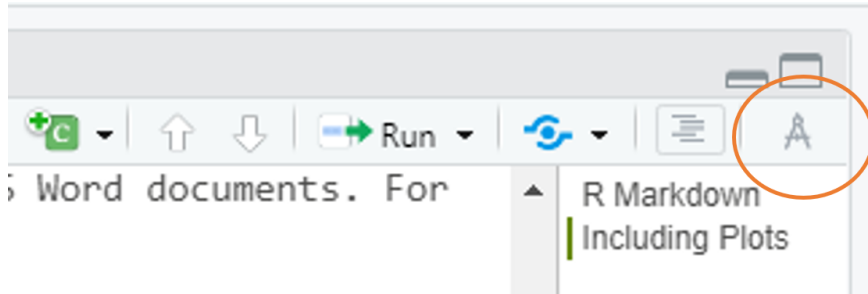

- Very helpful in the beginning until you remember how everything works in markdown
- Especially helpful for markdown tables and citations
- But careful: Can reformat the `.Rmd` file a bit, so sometimes if you switch back it can look different than before.

# Adding citations - The classic way

Bibliographies can be included via a BibTeX data base.

- Create a `.bib` file that consists of bibliography entries

```
@Book{cookbook,  
  title = {R Markdown Cookbook},  
  author = {Yihui Xie and Christophe Dervieux and Emily Riederer},  
  publisher = {Chapman and Hall/CRC},  
  address = {Boca Raton, Florida},  
  year = {2020},  
  note = {ISBN 9780367563837},  
  url = {https://bookdown.org/yihui/rmarkdown-cookbook},  
}
```

# Adding citations - The classic way

Bibliographies can be included via a BibTeX data base.

- Create a `.bib` file that consists of bibliography entries
- Add name and location of your `.bib` file as a metadata field in YAML header

```
---  
output: html_document  
bibliography: references.bib  
---
```

- Cite an article from the database with `@bib_item_name` for in text citations or `[@bib_item_name]` for citation in brackets
  - Here, I cite `@cookbook` because it's a good book `[@cookbook]`
  - Here, I cite Xie, Dervieux, and Riederer (2020) because it's a good book (Xie, Dervieux, and Riederer 2020)
- List of references used will be added to the end of the document
  - Just add a heading `# References` to end of the doc

# Adding citations - The classic way

- Add a custom citation style file with:


```
---  
output: html_document  
bibliography: references.bib  
csl: myrefstyle.csl  
---
```

- Most (all?) reference managers can export your citations as a `.bib` file
- Problem: RStudio does not auto-fill citations
  - You have to know the name of the citation in order to cite it

# Adding citations - Visual editor

Citations can also be added using the **visual editor** in RStudio.

- Visual editor creates and extends `.bib` file automatically
- Search and add citations from
  - The bibliography file
  - Zotero
  - DOI
  - ...
- Just click on the @ symbol in the visual editor to add a citation

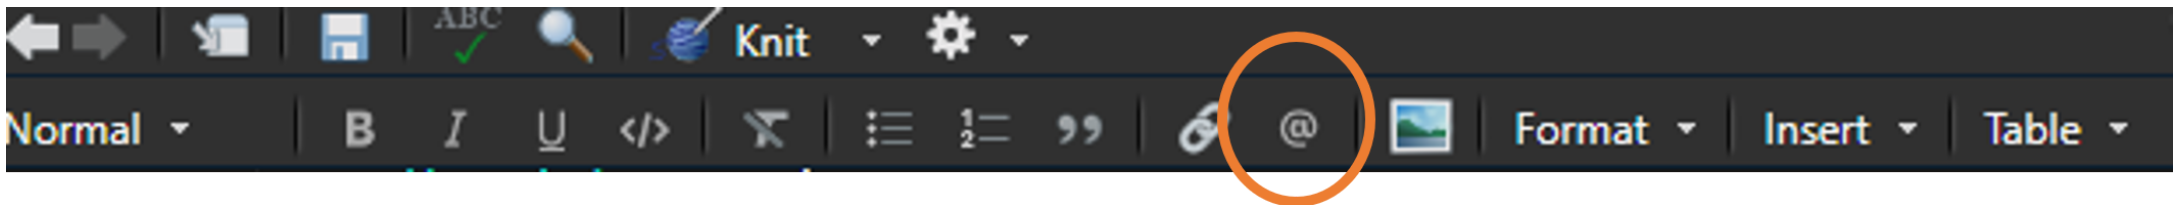

- You can also start typing @ and the editor will suggest you a list of citations that fit

# Adding citations - Visual editor

## Using Zotero

- If you use Zotero on your machine, RStudio should automatically detect the installation
- If not, go to `Tools->Global Options->R Markdown -> Citations` and enter the location of your Zotero data directory and the library that you would like to use
  - In General this should be recognized automatically



# Now you

## Task 1: Add some citations

Find the task description [here](#)

# A bit more on the output formats

`html_document, pdf_document, word_document`

# Specify multiple output types

- Specify multiple output types in the YAML header
  - Here just the default settings

```
---  
title: "My first document"  
author: "Selina Baldauf"  
date: "3/22/2022"  
output:  
  html_document: default  
  pdf_document: default  
  word_document: default  
bibliography: references.bib  
---
```

- Decide which output you want before rendering
- Chose the output type with the little arrow next to the knit button
- If you knit without specifying the output type, the last rendered type is taken

# Specify different output types

- Specify the options for different output types in the yaml header

```
---
title: "My first document"
author: "Selina Baldauf"
date: "3/22/2022"
output:
  html_document:
    toc: true
    toc_float: true
    highlight: "kate"
  pdf_document:
    toc: true
    highlight: "espresso"
bibliography: references.bib
---
```

- Keep in mind that multiple output types can become difficult if you use a lot of options and functionality specific only to one of the types
  - You will see this later e.g. when formatting tables

# html\_document

See [here](#) for more examples and options

# html\_document


Interactive graphs e.g. with `plotly`

```
library(ggplot2)
scatter <- ggplot(
  data = penguins,
  aes(
    x = bill_length_mm,
    y = bill_depth_mm,
    color = species,
    shape = species
  )
) +
  geom_point(size = 2, alpha = 0.8) +
  geom_smooth(method = "lm", se = FALSE) +
  scale_color_manual(values = c("darkorange", "purple", "cyan4")) +
  theme_minimal()
```

# html\_document

Interactive graphs e.g. with `plotly`

```
library(plotly)
ggplotly(scatter)
```

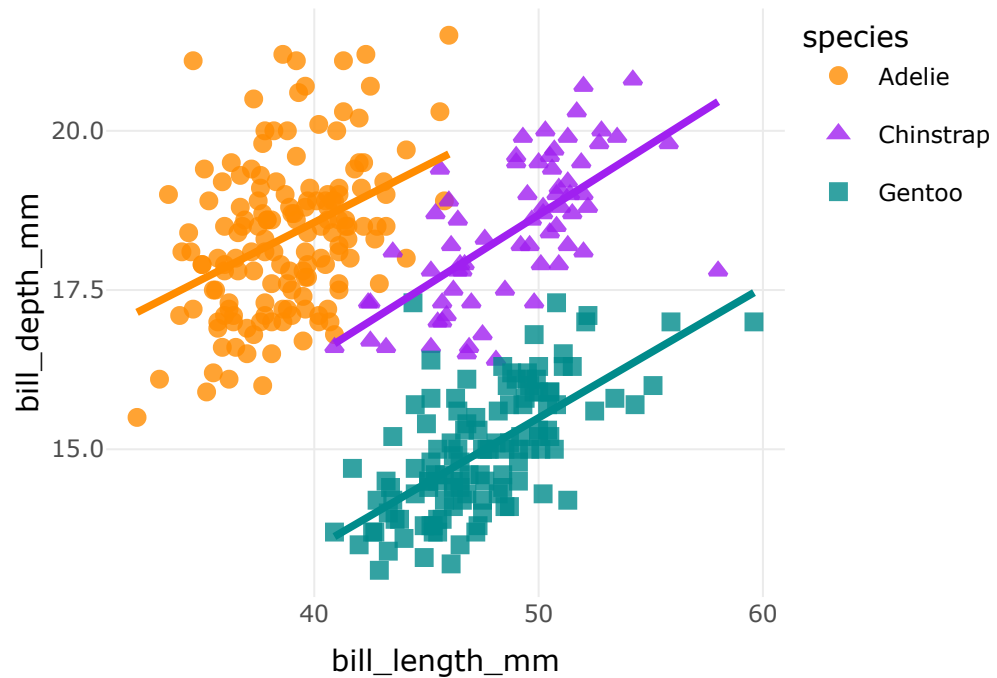

# html\_document

## Tabbed sections

```
## This is the main section {.tabset}
```

```
And here I add some text to the main section.
```

```
### The first tab
```

```
some content
```

```
### The second tab
```

```
some other content
```

## This is the main section

And here I add some text to the main section

---

The first tab

The second tab

some content



# html\_document

## Customize with HTML and CSS (Advanced)

- Customize elements using HTML and/or CSS (advanced)
- Define custom elements
- Add the custom CSS to the YAML header

```
output:  
  html_document:  
    css: "my-style.css"
```

- Add HTML tags with CSS e.g. to change font color

`<span style="color: red;">red text</span>` becomes red text

# pdf\_document

See [here](#) for more examples and options

# pdf\_document

See all options and default values with `?rmarkdown::pdf_document`

- `fig_caption` will automatically number figures
- `citation_package` define the citation package to use (`natbib` or `bibtex`)
- `keep_tex`: Keep the intermediate `*.tex` file?
- `template`: Path to a template file

## Example

```
---  
title: "My first document"  
author: "Selina Baldauf"  
date: "3/22/2022"  
output:  
  pdf_document:  
    fig_caption: true  
    citation_package: "natbib"  
    keep_tex: true  
    template: "my_template.tex"  
---
```

# pdf\_document

- You can use LaTeX syntax in the text
- Define some latex options as *top-level* YAML metadata, e.g.

```
---
title: "My first document"
author: "Selina Baldauf"
date: "3/22/2022"
output:
  pdf_document:
    fig_caption: true
fontsize: 11pt
geometry: "margin=1in"
documentclass: "article"
urlcolor: "blue"
---
```

# word\_document

See [here](#) for more examples and options

# word\_document

See all options and default values with `?rmarkdown::word_document`

- Not so many features directly available in R Markdown
- Use an office template for customization

```
---  
title: "My first document"  
author: "Selina Baldauf"  
date: "3/22/2022"  
output:  
  word_document:  
    reference_docx: "my-styles.docx"  
---
```

Read or watch how to create a custom office template

- Package `{officedown}` might be useful
  - It offers templates for advanced Word documents and Powerpoint presentations
  - `File -> New File -> R Markdown... -> From Template`

# Now you

## Task 2: Try different output formats

Find the task description [here](#)

Nice looking tables in R Markdown



# Nice looking tables with R Markdown

- The default for printing tables looks the same as printing it in the console:

```
iris_sum
```

```
## # A tibble: 3 x 5
##   Species      Sepal.Length Sepal.Width Petal.Length Petal.Width
##   <fct>         <dbl>         <dbl>         <dbl>         <dbl>
## 1 setosa         5.01           3.43           1.46           0.246
## 2 versicolor    5.94           2.77           4.26           1.33
## 3 virginica     6.59           2.97           5.55           2.03
```

- This is not really nice for documents

# knitr::kable()

Simple to use table generator from the `knitr` package.

```
knitr::kable(iris_sum) # or iris_sum %>% knitr::kable()
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	5.006	3.428	1.462	0.246
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

- Chose `kable` as default table printing in YAML header:

```
df_print: "kable"
```

# knitr::kable()

Add arguments for additional formatting:

```
kable(x,  
  format,  
  digits = getOption("digits"),  
  row.names = NA,  
  col.names = NA,  
  align, caption = NULL,  
  label = NULL,  
  format.args = list(),  
  escape = TRUE, ...  
)
```

- See [here](#) for many examples many different use cases

# knitr::kable()

Example:

```
knitr::kable(  
  iris_sum,  
  digits = 1,  
  col.names = c("Species", "Sepal Length", "Sepal Width", "Petal Length", "Petal Width"),  
  caption = "Summary of the Iris data",  
  align = "l"  
)
```

Summary of the Iris data				
Species	Sepal Length	Sepal Width	Petal Length	Petal Width
setosa	5.0	3.4	1.5	0.2
versicolor	5.9	2.8	4.3	1.3
virginica	6.6	3.0	5.6	2.0

# The {kableExtra} package

- Provides options for table styling
- Most of the features work for both HTML and PDF tables
- Find the full documentation [here](#)
  - If you use tables a lot, I recommend looking through the documentation to see all possibilities
- Load the packages in the setup chunk before using them

```
library(knitr)  
library(kableExtra)
```

# The {kableExtra} package

`kable_styling()` is the basic styling function

- Use the pipe operator (`%>%`) to pipe `kable()` output to styling function `kable_styling()`

```
iris_sum %>%  
  kable() %>%  
  kable_styling(  
    full_width = FALSE, # display table on full page width?  
    position = "left",  # if not full width -> where  
    font_size = 15  
  )
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	5.006	3.428	1.462	0.246
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

# The {kableExtra} package

`kable_styling()` provides styling options

- Additional styling options for HTML output are passed via `bootstrap_options`

```
iris_sum %>%  
  kable() %>%  
  kable_styling(  
    full_width = FALSE, # display table on full page width?  
    position = "left",  # if not full width -> where  
    font_size = 15,  
    bootstrap_options = c("striped", "hover")  
  )
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	5.006	3.428	1.462	0.246
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

# The {kableExtra} package

`kable_styling()` provides styling options

- Additional styling options for PDF output are passed via `latex_options`

```
iris_sum %>%  
  kable(booktabs = TRUE) %>%  
  kable_styling(  
    full_width = FALSE, # display table on full page width?  
    position = "left", # if not full width -> where  
    font_size = 15,  
    bootstrap_options = c("striped", "hover"),  
    latex_options = c("striped", "hold_position", "scale_down")  
  )
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	5.006	3.428	1.462	0.246
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

- Depending on the output format you chose, `bootstrap_options` or `latex_options` will be ignored



# The {kableExtra} package

`kable_styling()` provides styling options

- Additional styling options for PDF output are passed via `latex_options`

```
iris_sum %>%  
  kable(booktabs = TRUE) %>%  
  kable_styling(  
    full_width = FALSE, # display table on full page width?  
    position = "left", # if not full width -> where  
    font_size = 15,  
    bootstrap_options = c("striped", "hover"),  
    latex_options = c("striped", "hold_position", "scale_down")  
  )
```

- `booktabs = TRUE` will use the `booktabs` LaTeX package to create nice horizontal lines and removes vertical lines
- `hold_position` places the table where it is created in the document (no floating)
- `striped` creates striped tables

# The {kableExtra} package

## Packing rows and columns

```
iris_sum %>%  
  kable() %>%  
  kable_styling(font_size = 15) %>%  
  add_header_above(c("", "Sepals" = 2, "Petals" = 2)) %>%  
  pack_rows("Group 1", 1, 1) %>%  
  pack_rows("Group 2", 2, 3)
```

	Sepals		Petals	
Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
Group 1				
setosa	5.006	3.428	1.462	0.246
Group 2				
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

# The {kableExtra} package

## Adding footnotes

```
iris_sum %>%  
  kable() %>%  
  footnote(general = "Here is a general comments of the table. ",  
          number = c("Footnote 1; ", "Footnote 2; "),  
          alphabet = c("Footnote A; ", "Footnote B; "),  
          symbol = c("Footnote Symbol 1; ", "Footnote Symbol 2")  
  )
```

virginica	6.588	2.974	5.552	2.026
<i>Note:</i>				
Here is a general comments of the table.				
<sup>1</sup> Footnote 1;				
<sup>2</sup> Footnote 2;				
<sup>a</sup> Footnote A;				
<sup>b</sup> Footnote B;				
<sup>*</sup> Footnote Symbol 1;				
<sup>†</sup> Footnote Symbol 2				

# The {kableExtra} package

## Some predefined html themes

- `kableExtra` offers some themes for HTML tables
  - `kable_paper`, `kable_classic`, `kable_classic_2`, `kable_minimal`, `kable_material` and `kable_material_dark`
  - Use them alternative to `kable_styling()`

```
iris_sum %>%  
  kable() %>%  
  kable_classic(  
    font_size = 15  
  )
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	5.006	3.428	1.462	0.246
versicolor	5.936	2.770	4.260	1.326
virginica	6.588	2.974	5.552	2.026

- This only works with HTML output! It will give you an error for PDF output.

# The {flextable} package

- Works with PDF, HTML and Word output
  - I recommend it for Word output
- Alternative to `kable` and `kableExtra`
- Set options for all tables in beginning (e.g. in setup chunk)

```
library(flextable)
set_flextable_defaults(
  font.size = 10,
  theme_fun = theme_booktabs,
  padding = 6,
  digits = 1
)
```

- See all options with `?flextable::set_flextable_defaults`

# The {flextable} package

- An example table that looks decent in all 3 outputs

```
iris_sum %>%  
  flextable() %>%  
  set_caption("Summary of the iris data") %>%  
  set_header_labels(  
    Sepal.Length = "Sepal Length",  
    Sepal.Width = "Sepal Width",  
    Petal.Length = "Petal Length",  
    Petal.Width = "Petal Width"  
  ) %>%  
  colformat_double()
```

Summary of the iris data

Species	Sepal Length	Sepal Width	Petal Length	Petal Width
setosa	5.0	3.4	1.5	0.2
versicolor	5.9	2.8	4.3	1.3
virginica	6.6	3.0	5.6	2.0

# Now you

## Task 3: Create a nice table

Find the task description [here](#)