

1. SET THE FOLLOWING IN CONFIG FOLDER

- o DbConfig -> Mongo DB connection String
- jwtSecret -> Secret for JWT Token


2. SET THE FOLLOWING IN .ENV FILE

- SEND_GRID_KEY -> Nodemailer API key
- 3. In Client, endpoint.json set the sysendpoint to the backend API host address
- 4. Test Account created are [to test duplicate error messages]
 - a. test1@gmail.com
 - b. test2@gmail.com
- 5. Snapshot of the UI

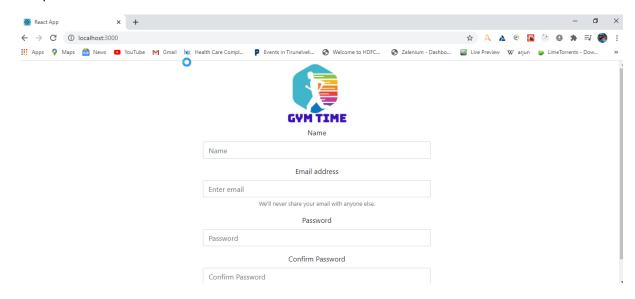


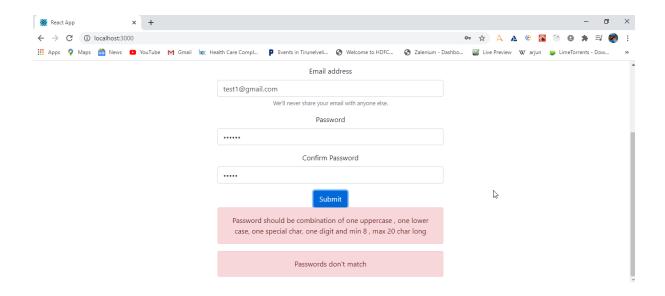

Duplicate message Id:

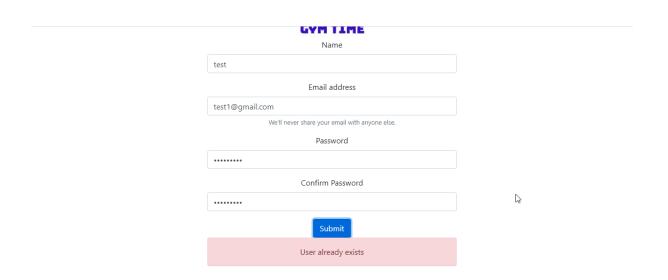

Success message:

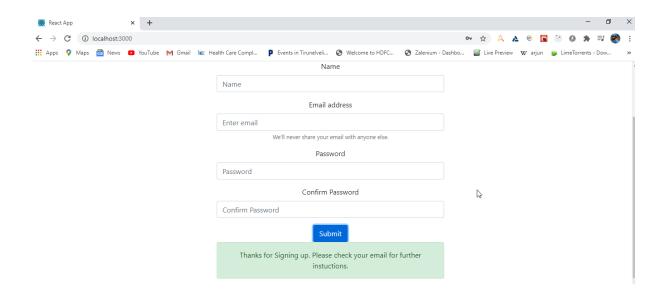

DB Values:

