


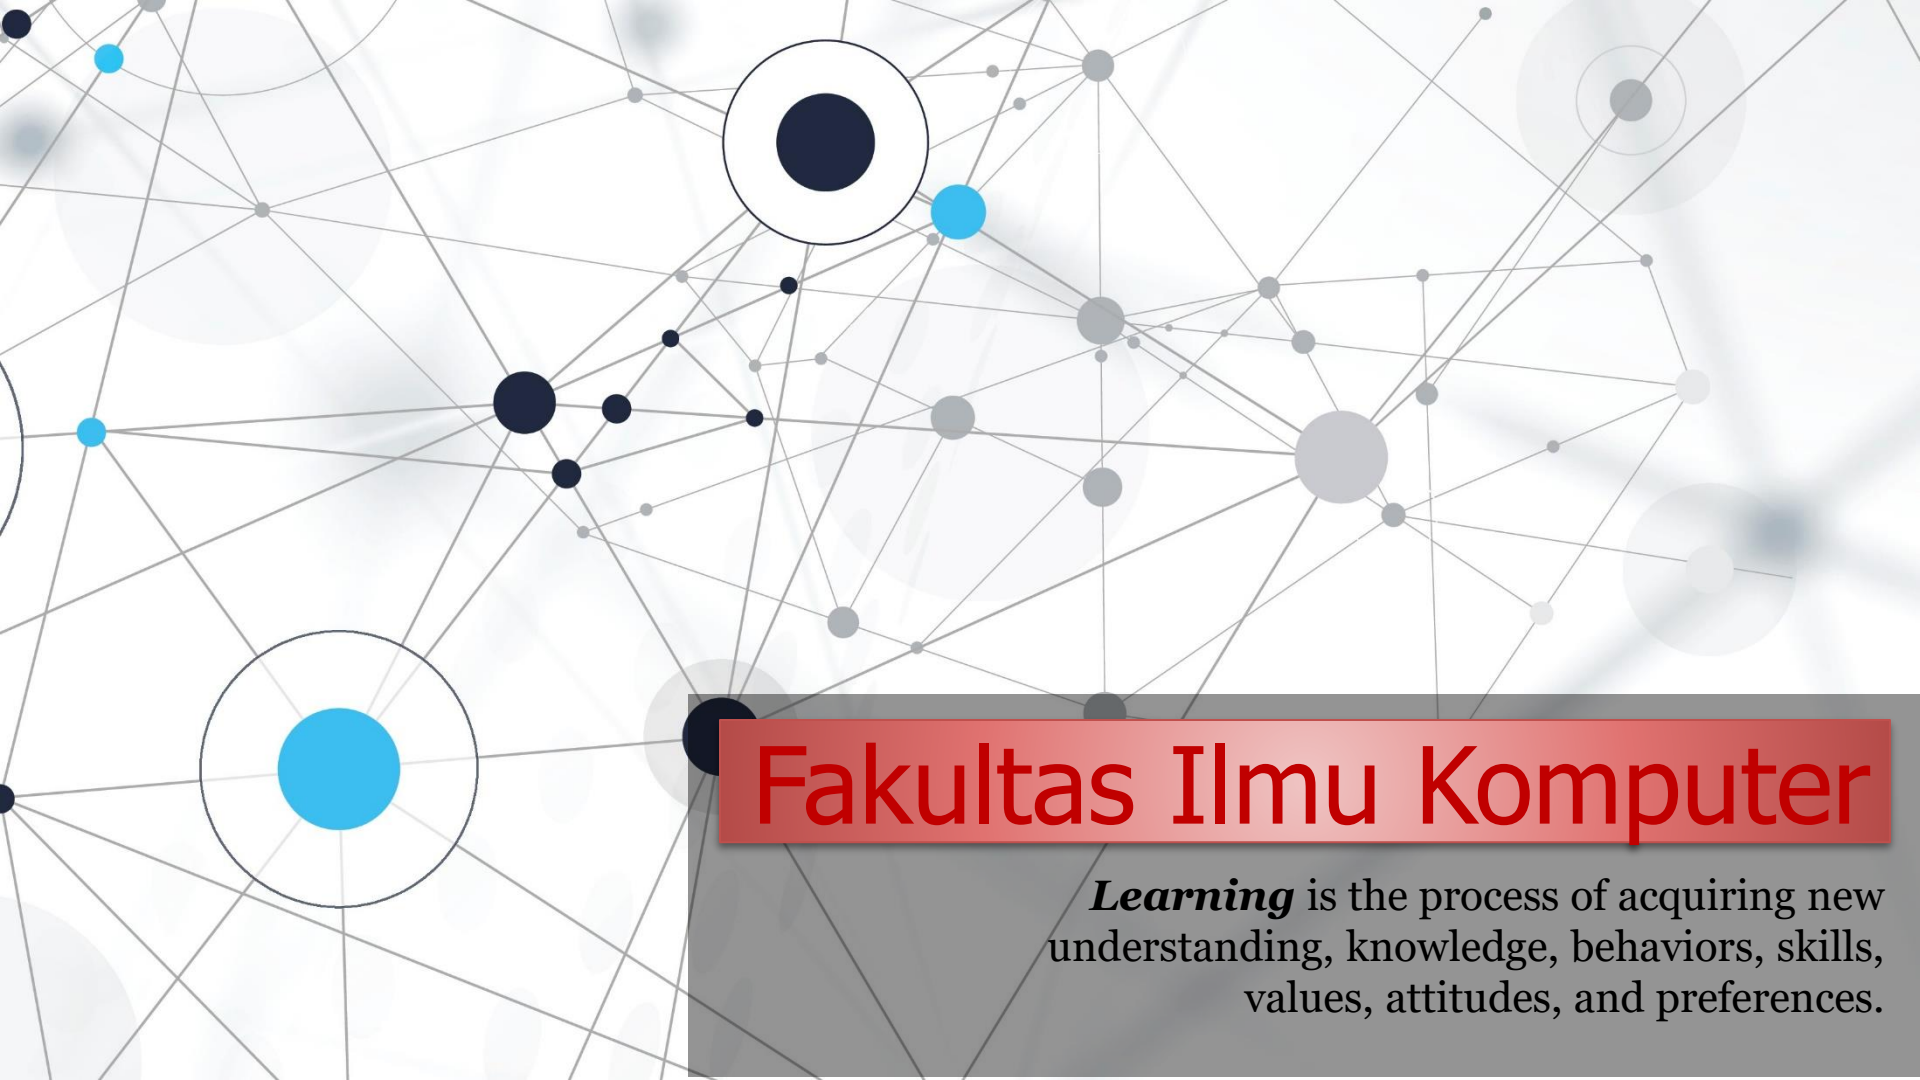

Fakultas Ilmu Komputer

Learning is the process of acquiring new understanding, knowledge, behaviors, skills, values, attitudes, and preferences.

Framework #6

[Bootstrap & JQuery]



Front-End Web Developer

Seorang **Front-End Web Developer** adalah *Software Developer* yang bertanggung jawab untuk merancang dan membangun berbagai aplikasi *web* secara ***responsif***, ***interaktif***, dan juga ***user friendly***. Seorang Front-End Web Developer memiliki peranan besar dalam pengembangan aplikasi web karena bertanggung jawab langsung kepada ***pengalaman pengguna***.



Read Source:

<https://www.dicoding.com/learningpaths/22/>

Front-End Web Development




Developer memegang peranan penting di dalam pengembangan sebuah *situs* atau *aplikasi*. Apakah perbedaan *front end* dan *back end*?

Front-end & Back-end Developer :

Front end developer adalah orang yang berperan mengembangkan tampilan situs atau aplikasi melalui HTML, CSS, dan JavaScript. Sedangkan, *back end developer* adalah orang yang berperan agar situs atau aplikasi dapat bekerja.

Bootstrap & JQuery

Bootstrap is a free and open-source CSS framework directed at responsive, mobile-first front-end web development. **jQuery** is a JavaScript library designed to simplify HTML DOM tree traversal and manipulation, as well as event handling, CSS animation, and Ajax.

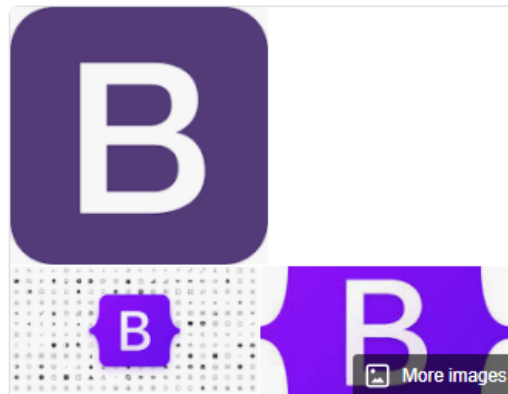

Bootstrap

Front-end framework

Bootstrap is a free and open-source CSS framework directed at responsive, mobile-first front-end web development. It contains CSS- and JavaScript-based design templates for typography, forms, buttons, navigation, and other interface components.

[Wikipedia](#)

Stable release: 5.0.1 / 13 May 2021; 34 days ago


Initial release: August 19, 2011; 9 years ago

Original author(s): Mark Otto, Jacob Thornton

Written in: [HTML](#), [CSS](#), [Less](#) (v3), [Sass](#) (v4) and [JavaScript](#)

Platform: [Web platform](#)

License: [MIT License](#) ([Apache License 2.0](#) prior to 3.1.0)

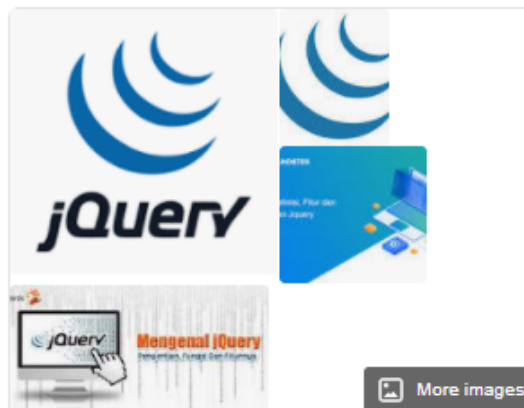

jQuery

Software

jQuery is a JavaScript library designed to simplify HTML DOM tree traversal and manipulation, as well as event handling, CSS animation, and Ajax. It is free, open-source software using the permissive MIT License. As of May 2019, jQuery is used by 73% of the 10 million most popular websites. [Wikipedia](#)

Stable release: 3.6.0 / (March 2, 2021; 3 months ago)

Initial release: August 26, 2006; 14 years ago

Original author(s): John Resig

Size: 27–274 KB

License: [MIT](#)

Written in: [JavaScript](#)

How to download **Bootstrap** and **jQuery** and add/use them offline in the project?



File/Directory Framework Structure

No	Directory/File	Description (<i>optional</i>)
1	app	app directory is the web application's private directory of this new framework.
2	public	public directory is to store all the public static resources like html , css , image and js files.
3	core	core directory is to store all files for routing and it will store the framework's core classes.
4	model	model directory is for all app's Model classes.
5	view	view directory is for all app's View classes.
6	controller	controller directory is for all app's Controller classes.
7	css	css directory is for Cascading Style Sheets (CSS) files.
8	img	Img directory is for images files.
9	js	js directory is for Javascript files.
10	index.php	<i>index.php</i> file is the “ <i>entry-point</i> ” file, the front controller to the users.

Additional Directories:

template directory stores the template files like *header* file and *footer* file.

config directory stores the app's configuration files.


upload directory is for uploaded files, such as uploaded images.

db directory is database related classes, such as database driver classes.

helper directory is help/assistant functions.

library directory is for class libraries.

MVC Assets Directory

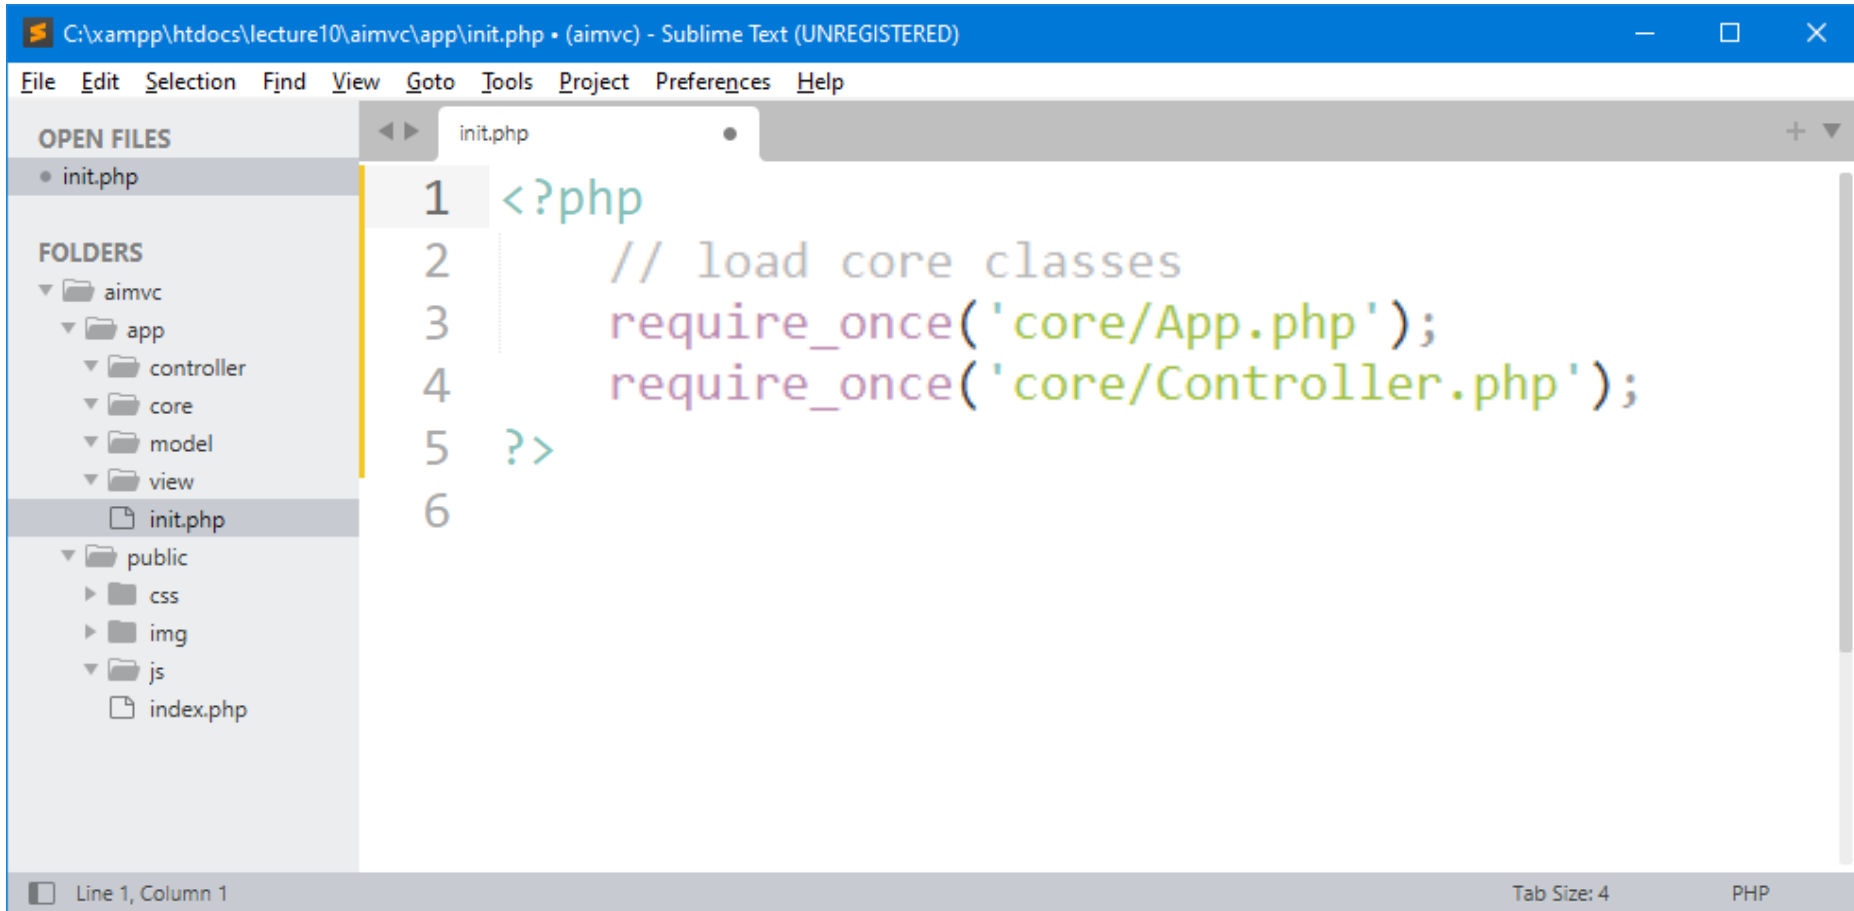

The screenshot shows a Sublime Text editor window with the file path `C:\xampp\htdocs\lecture10\aimvc\app\init.php`. The editor displays the following PHP code in `init.php`:

```
1 <?php
2     // load core classes
3     require_once('core/App.php');
4     require_once('core/Controller.php');
5 ?>
6
```

The left sidebar shows the project structure under the **FOLDERS** section:

- aimvc
 - app
 - controller
 - core
 - model
 - view
 - init.php
 - public
 - css
 - img
 - js
 - index.php

The status bar at the bottom indicates "Line 1, Column 1", "Tab Size: 4", and "PHP".

The **assets directory** is more like a files system and provides more freedom to put any file you would like in the directory. Here, we used **Public Directory** as a assets directory which store some public static resources like *css*, *image* and *js* files. The public directory contains the *index.php* file, which is the entry point for all requests entering the application and **configures autoloading**. This directory also *houses* the **assets** such as **images**, **JavaScript**, and **CSS**.

Laravel Directory Structure

The App Directory

- # The `Broadcasting` Directory
- # The `Console` Directory
- # The `Events` Directory
- # The `Exceptions` Directory
- # The `Http` Directory
- # The `Jobs` Directory
- # The `Listeners` Directory
- # The `Mail` Directory
- # The `Models` Directory
- # The `Notifications` Directory
- # The `Policies` Directory
- # The `Providers` Directory
- # The `Rules` Directory

The Root Directory

- # The `app` Directory
- # The `bootstrap` Directory
- # The `config` Directory
- # The `database` Directory
- # The `public` Directory
- # The `resources` Directory
- # The `routes` Directory
- # The `storage` Directory
- # The `tests` Directory
- # The `vendor` Directory


Read Source:

<https://laravel.com/docs/8.x/structure/>

The slide features a white background with green leaves and branches framing the top and bottom edges. The leaves are vibrant green and appear to be from a tree or shrub. The text is centered in the middle of the slide.

1 – Create URL Path Constants

1 – Create *config* File & Directory

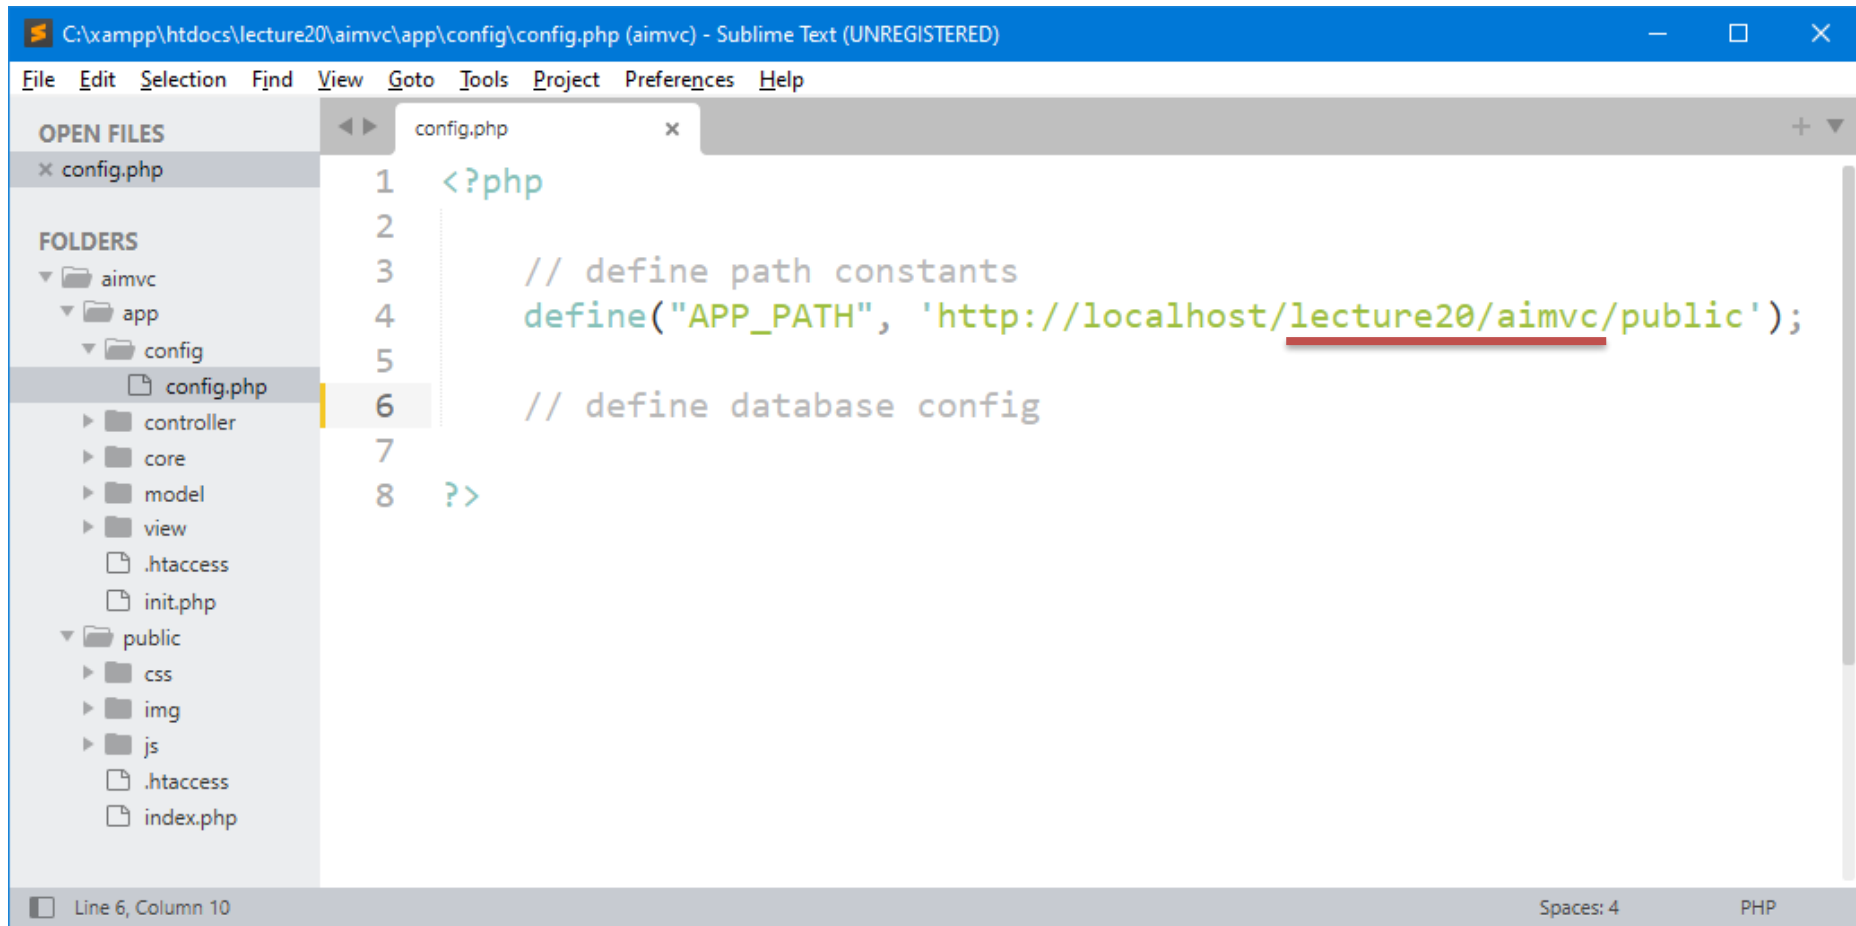


The screenshot shows the Sublime Text editor interface. The title bar indicates the file path: C:\xampp\htdocs\lecture20\aimvc\app\config\config.php (aimvc) - Sublime Text (UNREGISTERED). The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, and Help. On the left, the 'FOLDERS' sidebar shows a tree structure: aimvc > app > config > config.php. The main editor area displays the content of config.php with line numbers 1 through 8. The code is as follows:

```
1 <?php
2
3 // define path constants
4 define("APP_PATH", 'http://localhost/lecture20/aimvc/public');
5
6 // define database config
7
8 ?>
```

The status bar at the bottom shows 'Line 6, Column 10', 'Spaces: 4', and 'PHP'.

Define new *path constants* with the value is the your base URL.
Remember, if you change the **current working directory** name, you may need to rename also in this *config* file.

2 – Initialize *Config File* as a the Core

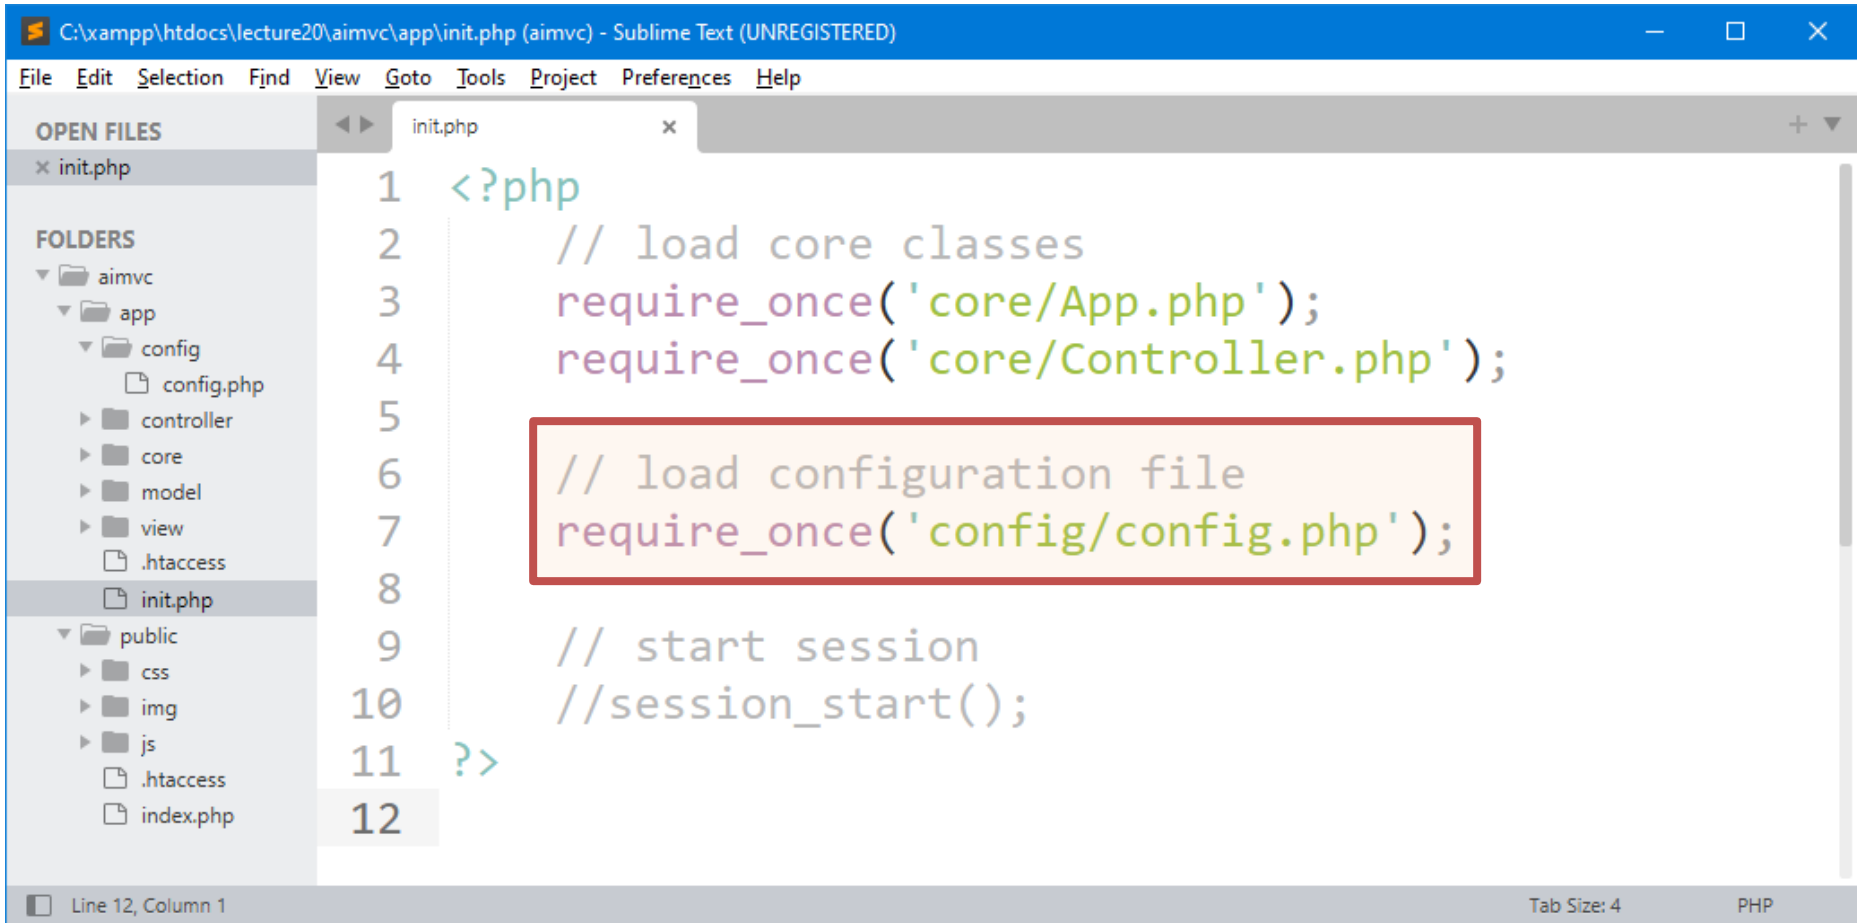

C:\xampp\htdocs\lecture20\aimvc\app\init.php (aimvc) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

OPEN FILES
x init.php

FOLDERS
▼ aimvc
▼ app
▼ config
config.php
▶ controller
▶ core
▶ model
▶ view
htaccess
init.php
▼ public
css
img
js
htaccess
index.php

```
1 <?php
2     // load core classes
3     require_once('core/App.php');
4     require_once('core/Controller.php');
5
6     // load configuration file
7     require_once('config/config.php');
8
9     // start session
10    //session_start();
11 ?>
12
```

Line 12, Column 1 Tab Size: 4 PHP

A decorative border of green leaves and branches at the top of the page.


2 – Download *Bootstrap* and Put in Public/Assets Directory

A decorative border of green leaves and branches at the bottom of the page.

1 - Download Bootstrap

Visit Bootstrap from Bootstrap official website.


Link: <https://getbootstrap.com/>

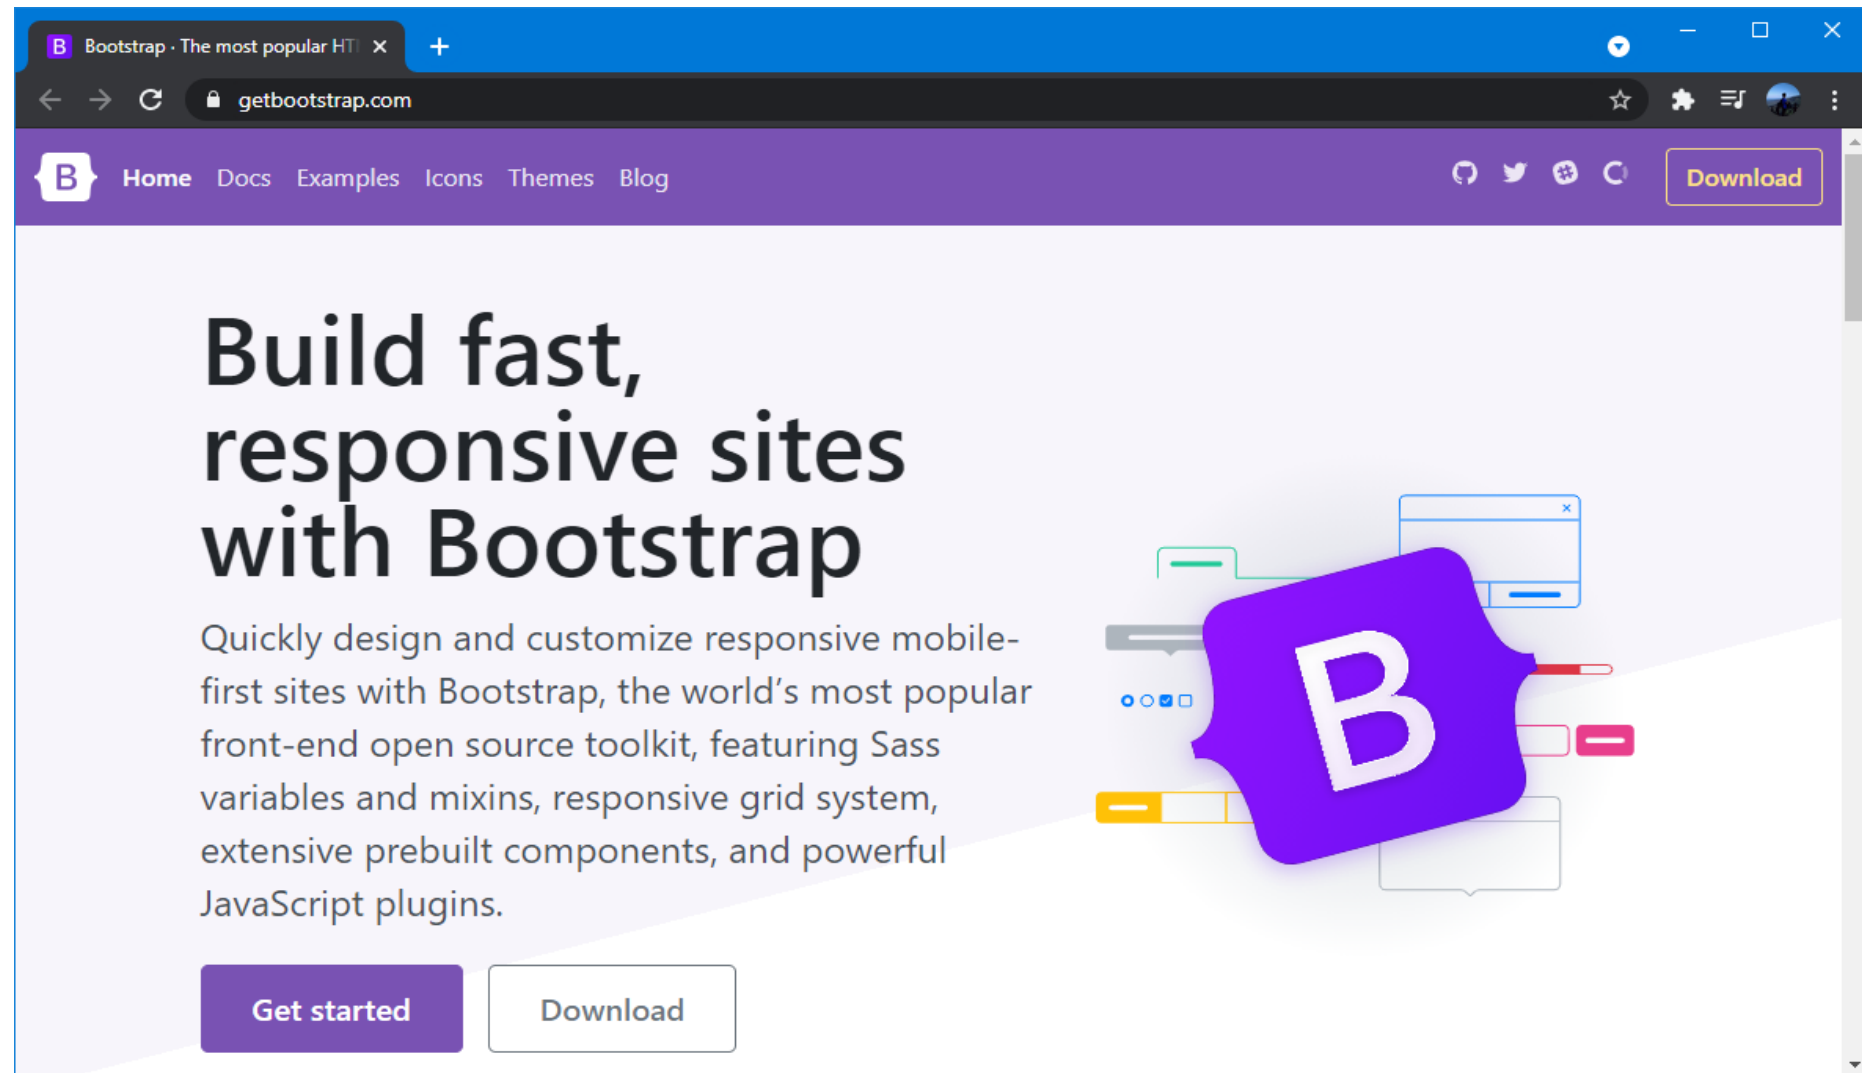

2 - Download Bootstrap

Download *ready-to-use compiled code* for **Bootstrap v5.0.2** to easily drop into your project.

Link: <https://getbootstrap.com/docs/5.0/getting-started/download/>

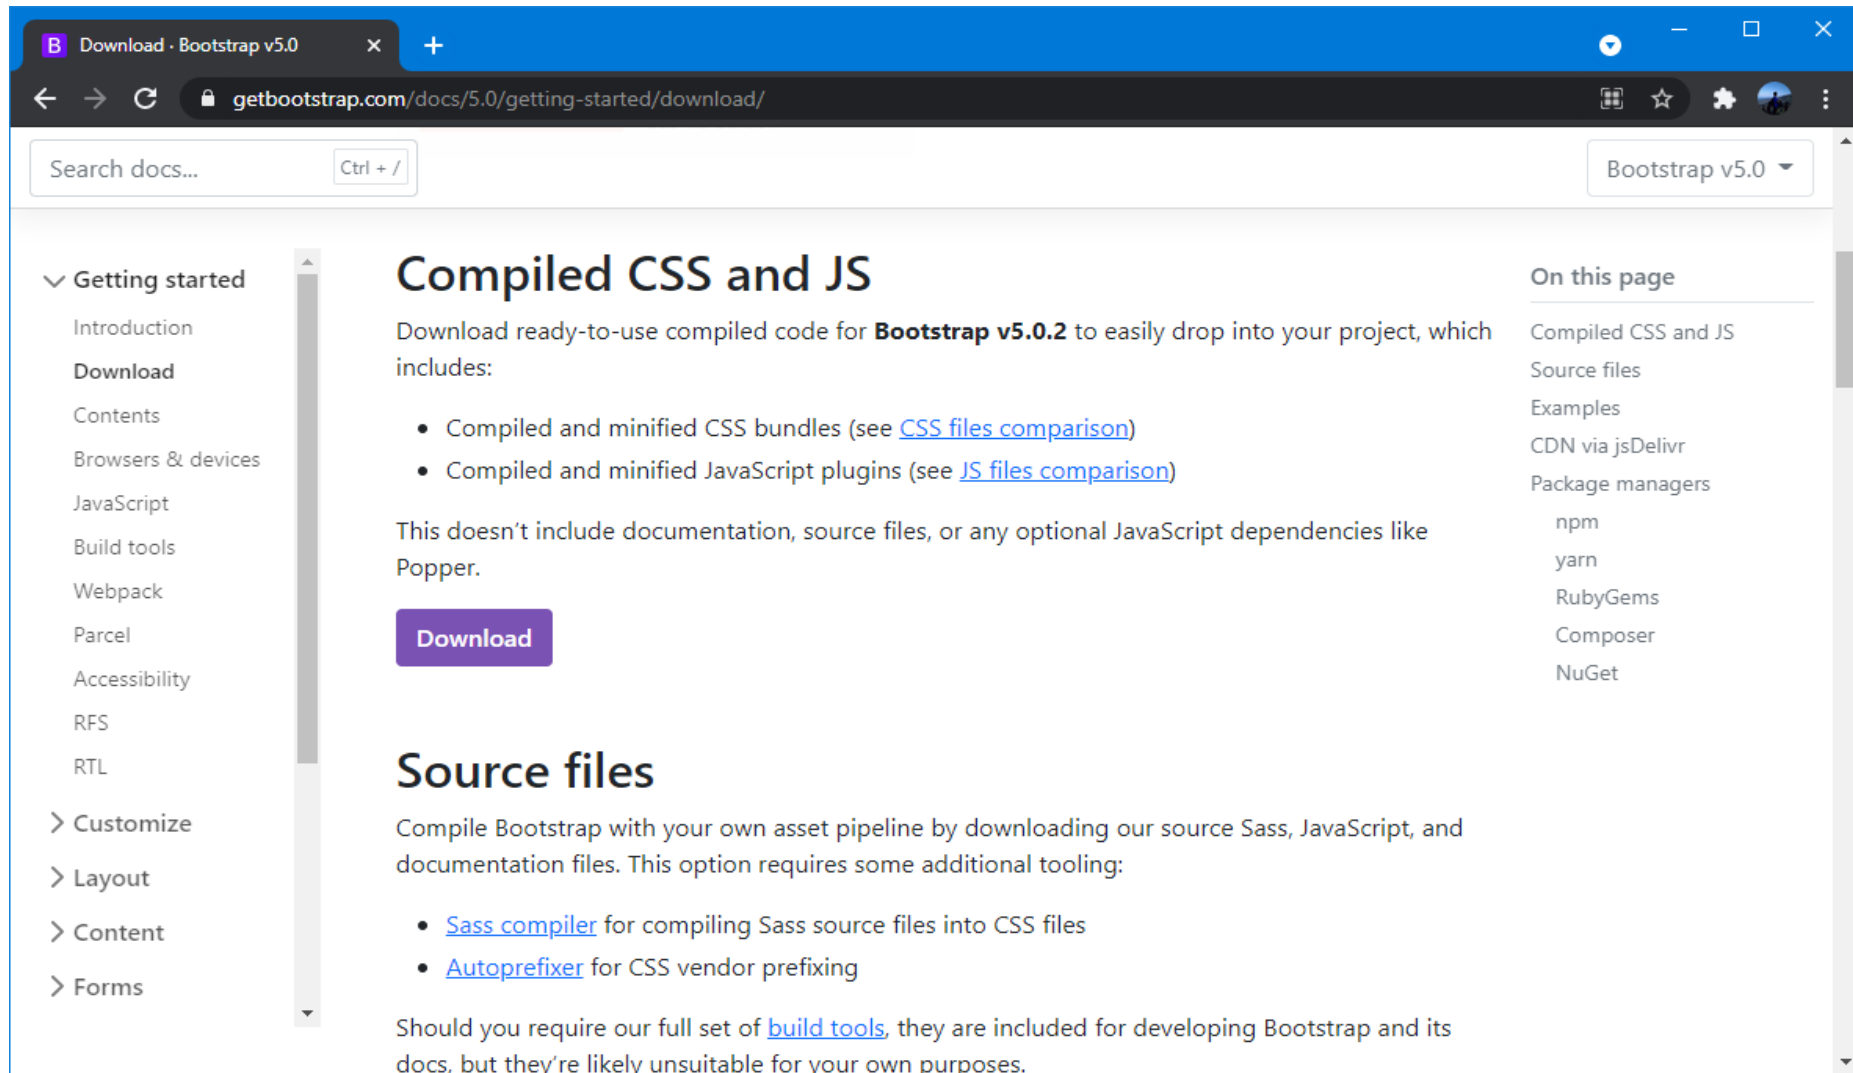

The screenshot shows a web browser window with the address bar displaying `getbootstrap.com/docs/5.0/getting-started/download/`. The page title is "Download · Bootstrap v5.0". The main content area is titled "Compiled CSS and JS" and contains the following text: "Download ready-to-use compiled code for **Bootstrap v5.0.2** to easily drop into your project, which includes:" followed by a bulleted list: "• Compiled and minified CSS bundles (see [CSS files comparison](#))" and "• Compiled and minified JavaScript plugins (see [JS files comparison](#))". Below this, it states: "This doesn't include documentation, source files, or any optional JavaScript dependencies like Popper." and features a prominent purple "Download" button. To the right, under the heading "On this page", there is a list of links: "Compiled CSS and JS", "Source files", "Examples", "CDN via jsDelivr", "Package managers" (with sub-links for "npm", "yarn", "RubyGems", "Composer", and "NuGet"). A left sidebar contains a navigation menu with categories like "Getting started", "Customize", "Layout", "Content", and "Forms".

Download · Bootstrap v5.0

getbootstrap.com/docs/5.0/getting-started/download/

Search docs... Ctrl + /

Bootstrap v5.0

Compiled CSS and JS

Download ready-to-use compiled code for **Bootstrap v5.0.2** to easily drop into your project, which includes:

- Compiled and minified CSS bundles (see [CSS files comparison](#))
- Compiled and minified JavaScript plugins (see [JS files comparison](#))

This doesn't include documentation, source files, or any optional JavaScript dependencies like Popper.

[Download](#)

Source files

Compile Bootstrap with your own asset pipeline by downloading our source Sass, JavaScript, and documentation files. This option requires some additional tooling:

- [Sass compiler](#) for compiling Sass source files into CSS files
- [Autoprefixer](#) for CSS vendor prefixing

Should you require our full set of [build tools](#), they are included for developing Bootstrap and its docs, but they're likely unsuitable for your own purposes.

On this page

- Compiled CSS and JS
- Source files
- Examples
- CDN via jsDelivr
- Package managers
 - npm
 - yarn
 - RubyGems
 - Composer
 - NuGet


Getting started

- Introduction
- Download
- Contents
- Browsers & devices
- JavaScript
- Build tools
- Webpack
- Parcel
- Accessibility
- RFS
- RTL

Customize

- Layout
- Content
- Forms

3 - Extract Bootstrap & Place *them* in Project

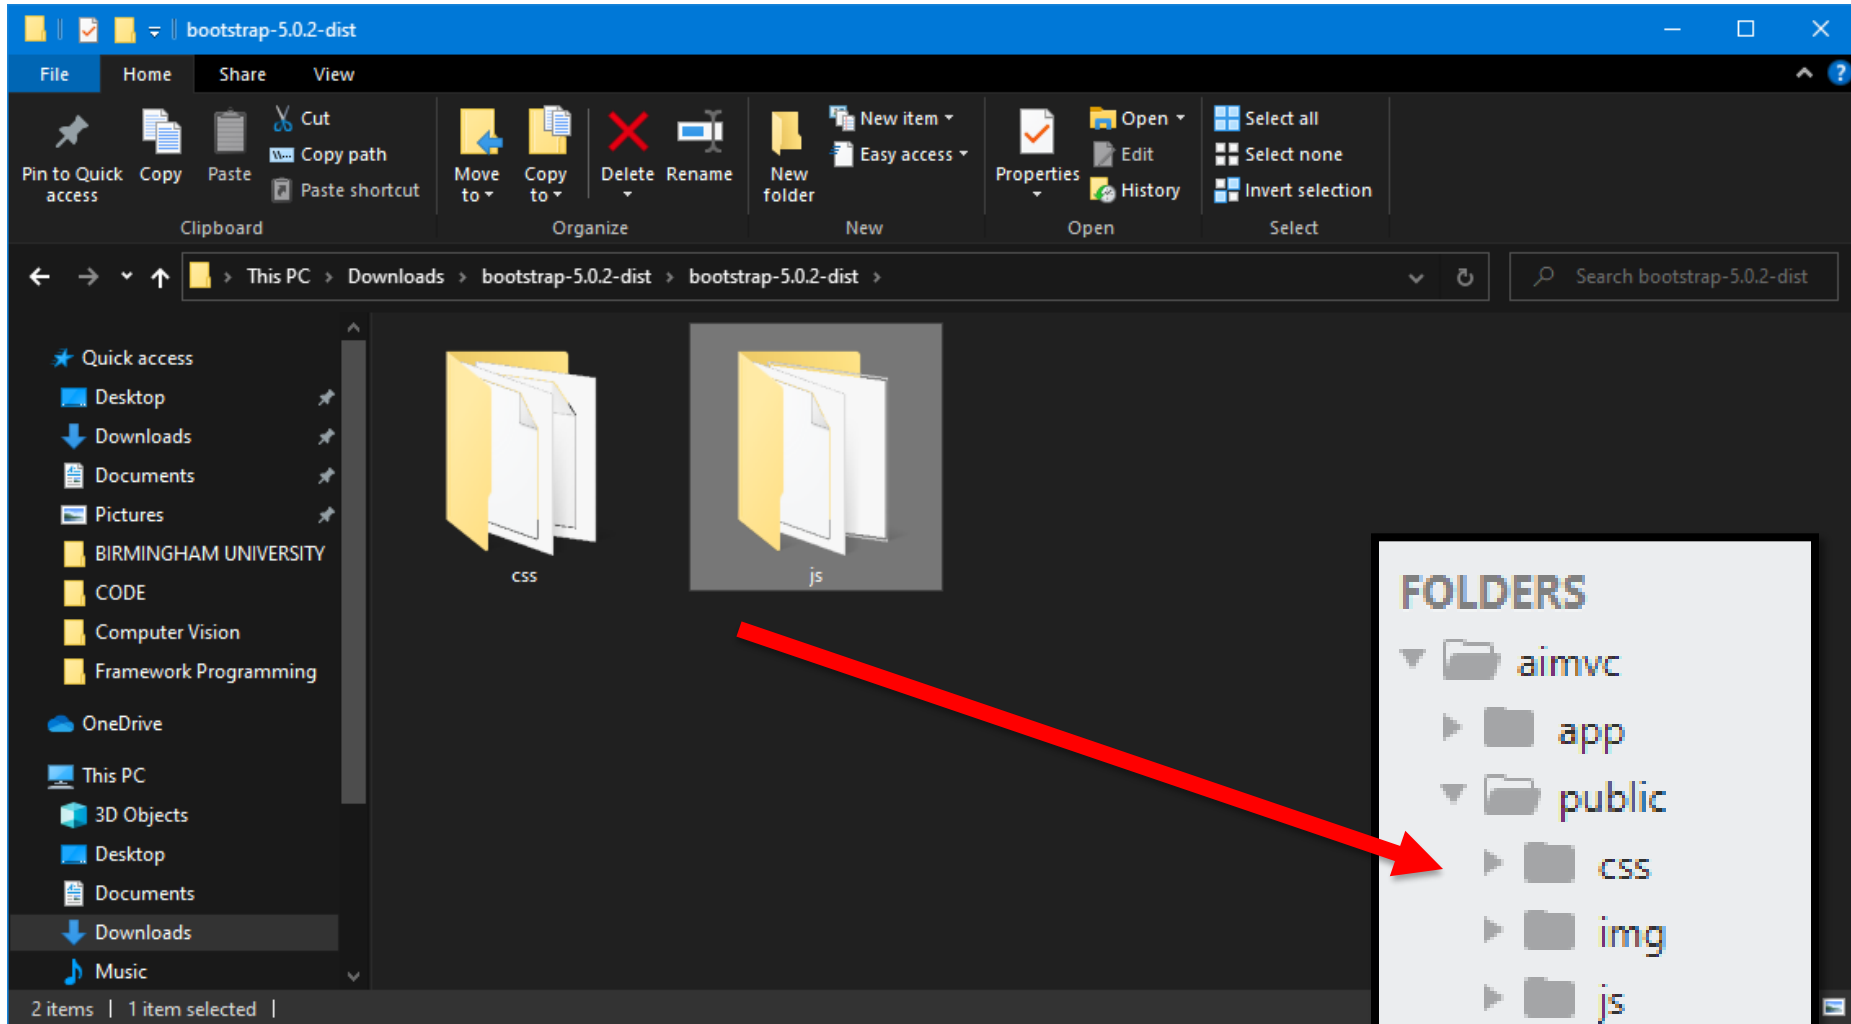

Copy and paste these two folders in our ***public/assets*** ***directory***, if the directory already existed, you can paste and replace both directories.

A decorative border of green leaves and branches at the top of the page.


2 – Download *jQuery* and Put and Public/Assets Directory

A decorative border of green leaves and branches at the bottom of the page.

1 - Download jQuery

Visit jQuery from jQuery official website.

Link: <https://jquery.com/download/>

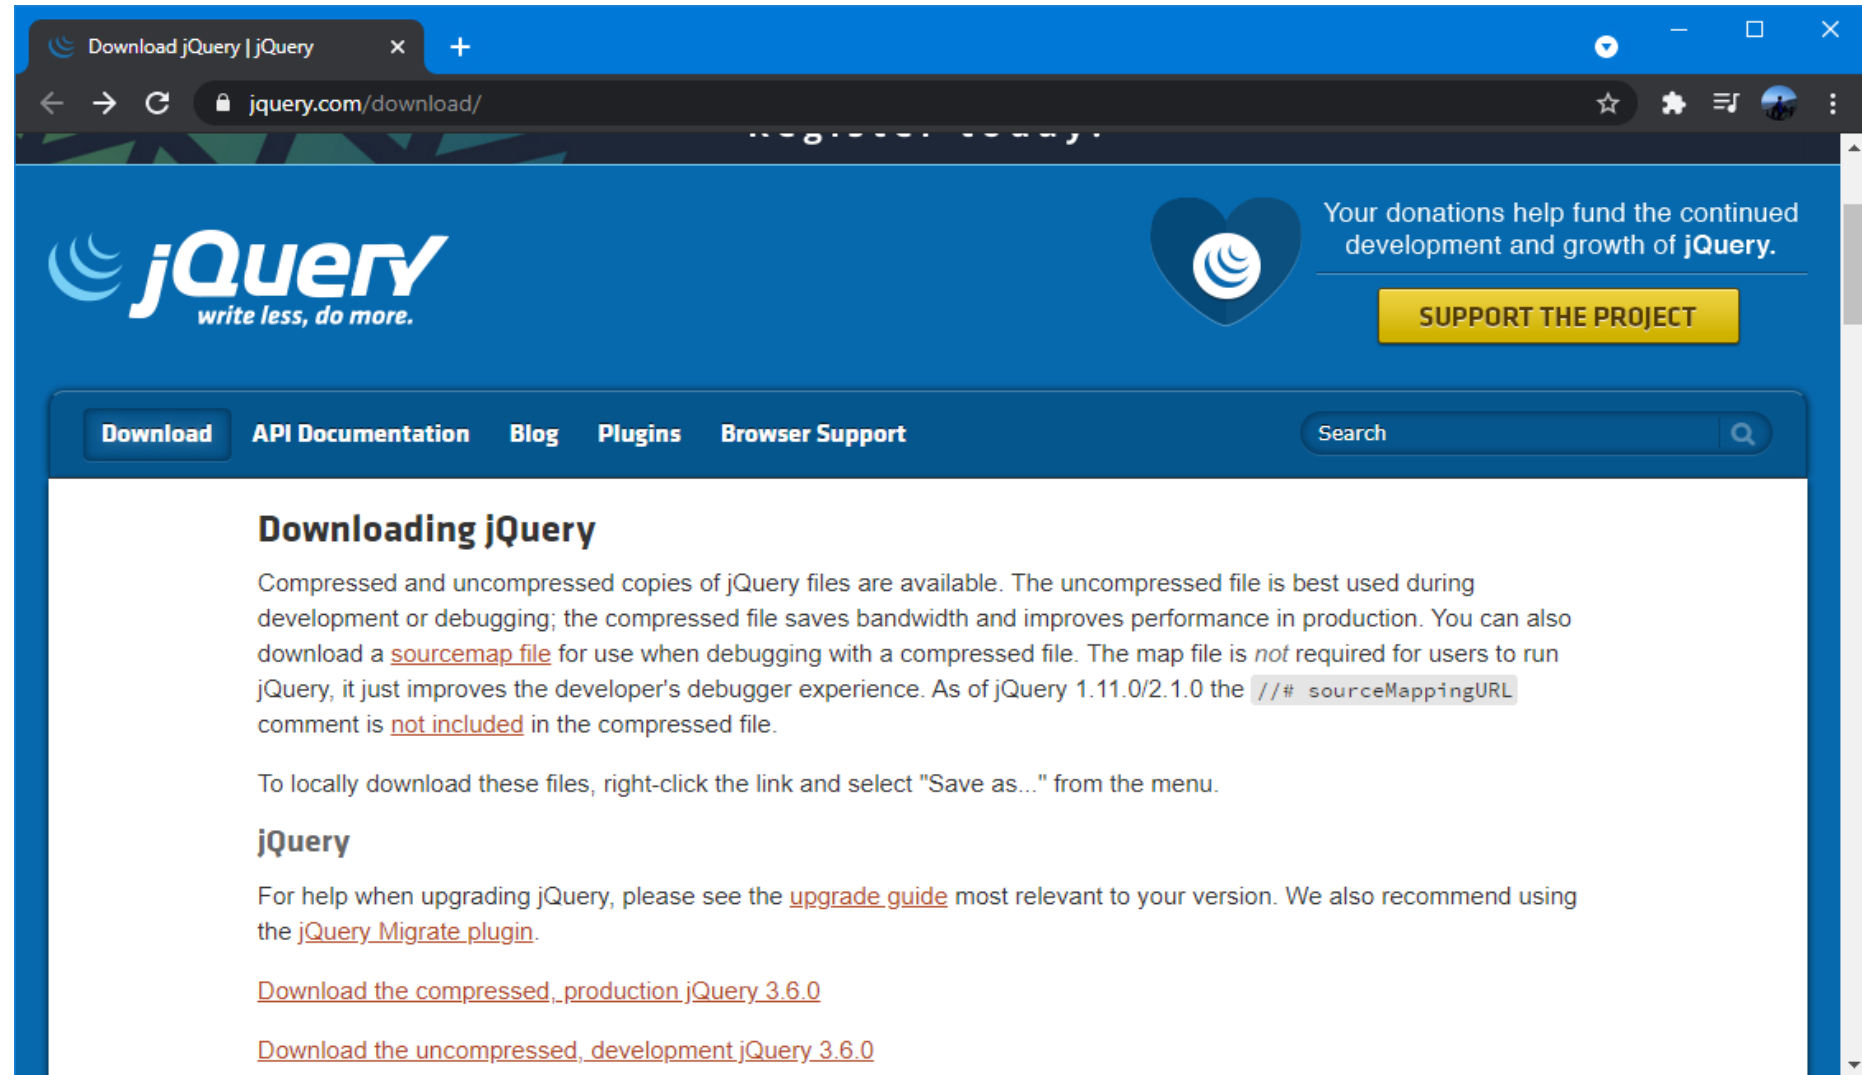A screenshot of a web browser displaying the jQuery download page. The browser's address bar shows 'jquery.com/download/'. The page has a blue header with the jQuery logo and the tagline 'write less, do more.' on the left. On the right, there is a heart icon and text stating 'Your donations help fund the continued development and growth of jQuery.' with a yellow 'SUPPORT THE PROJECT' button. Below the header is a navigation bar with links: 'Download', 'API Documentation', 'Blog', 'Plugins', and 'Browser Support'. A search bar is also present. The main content area is titled 'Downloading jQuery' and contains text explaining the availability of compressed and uncompressed files, the use of source maps, and a note about the sourceMappingURL comment. It also provides instructions on how to download the files and links to the jQuery upgrade guide and migration plugin. At the bottom, there are two links: 'Download the compressed, production jQuery 3.6.0' and 'Download the uncompressed, development jQuery 3.6.0'.

Download jQuery | jQuery

jquery.com/download/

jQuery
write less, do more.

Your donations help fund the continued development and growth of jQuery.

SUPPORT THE PROJECT

Download API Documentation Blog Plugins Browser Support

Search

Downloading jQuery

Compressed and uncompressed copies of jQuery files are available. The uncompressed file is best used during development or debugging; the compressed file saves bandwidth and improves performance in production. You can also download a [sourcemap file](#) for use when debugging with a compressed file. The map file is *not* required for users to run jQuery, it just improves the developer's debugger experience. As of jQuery 1.11.0/2.1.0 the `//# sourceMappingURL` comment is [not included](#) in the compressed file.

To locally download these files, right-click the link and select "Save as..." from the menu.

jQuery

For help when upgrading jQuery, please see the [upgrade guide](#) most relevant to your version. We also recommend using the [jQuery Migrate plugin](#).


[Download the compressed, production jQuery 3.6.0](#)

[Download the uncompressed, development jQuery 3.6.0](#)

2 - Download *jQuery.slim.min.js*

Visit jQuery from jQuery official website.

Link: <https://cdnjs.com/libraries/jquery/>
<https://code.jquery.com/jquery-3.3.1.slim.min.js>

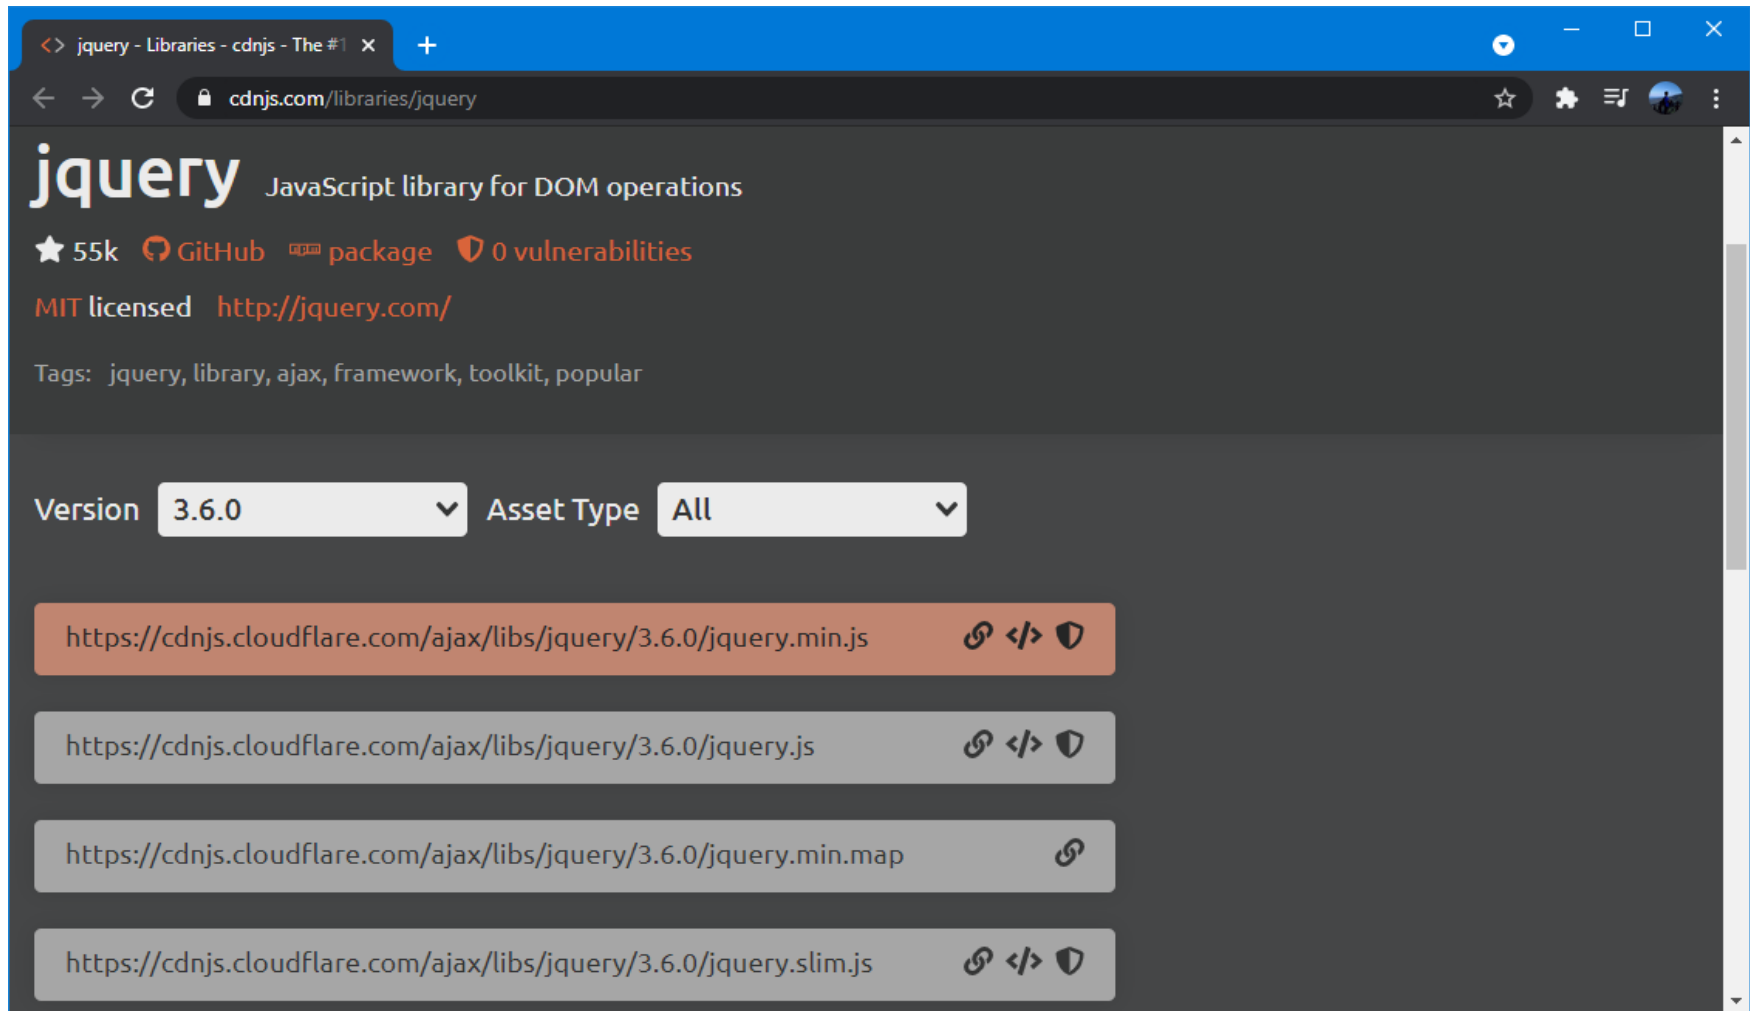

3 – Save to *your* Working Directory

The screenshot shows a Windows File Explorer window with the address bar displaying the path: `This PC > OS (C:) > xampp > htdocs > lecture20 > aimvc > public > js`. The left sidebar shows the 'Quick access' pane with various locations like Desktop, Downloads, Documents, Pictures, and OneDrive. The main pane displays a list of files with columns for Name, Date modified, Type, and Size. The file `jquery-3.3.1.slim.min.js` is selected and highlighted.

Name	Date modified	Type	Size
<code>bootstrap.bundle.js</code>	6/23/2021 2:25 AM	JavaScript File	204 KB
<code>bootstrap.bundle.js.map</code>	6/23/2021 2:25 AM	MAP File	415 KB
<code>bootstrap.bundle.min.js</code>	6/23/2021 2:25 AM	JavaScript File	77 KB
<code>bootstrap.bundle.min.js.map</code>	6/23/2021 2:25 AM	MAP File	319 KB
<code>bootstrap.esm.js</code>	6/23/2021 2:25 AM	JavaScript File	137 KB
<code>bootstrap.esm.js.map</code>	6/23/2021 2:25 AM	MAP File	283 KB
<code>bootstrap.esm.min.js</code>	6/23/2021 2:25 AM	JavaScript File	72 KB
<code>bootstrap.esm.min.js.map</code>	6/23/2021 2:25 AM	MAP File	218 KB
<code>bootstrap.js</code>	6/23/2021 2:25 AM	JavaScript File	146 KB
<code>bootstrap.js.map</code>	6/23/2021 2:25 AM	MAP File	284 KB
<code>bootstrap.min.js</code>	6/23/2021 2:25 AM	JavaScript File	59 KB
<code>bootstrap.min.js.map</code>	6/23/2021 2:25 AM	MAP File	212 KB
<code>jquery-3.3.1.slim.min.js</code>	6/24/2021 11:52 AM	JavaScript File	69 KB

13 items | 1 item selected 68.2 KB

Does bootstrap 5 require jQuery?

Bootstrap 5 is designed to be used ***without*** jQuery, but it's still possible to use our components with jQuery.

Bootstrap uses jQuery for JavaScript plugins (***like modals, tooltips, etc***). However, if you just use the CSS part of Bootstrap, you don't need jQuery.

A decorative border of green leaves and branches at the top of the slide.

3 – Quick start to add *Bootstrap* & *jQuery* to Project

A decorative border of green leaves and branches at the bottom of the slide.

1 - Get started with Bootstrap

The screenshot shows a web browser window with the address bar displaying `getbootstrap.com/docs/5.0/getting-started/introduction/`. The page title is "Introduction · Bootstrap v5.0". The main content area is titled "CSS" and contains the text: "Copy-paste the stylesheet `<link>` into your `<head>` before all other stylesheets to load our CSS." Below this text is a code block containing the following HTML snippet:

```
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css">
```

 A "Copy" button is visible next to the code. Below the CSS section is the "JS" section, which states: "Many of our components require the use of JavaScript to function. Specifically, they require our own JavaScript plugins and [Popper](#). Place **one of the following** `<script>`s near the end of your pages, right before the closing `</body>` tag, to enable them." This is followed by the "Bundle" section, which says: "Include every Bootstrap JavaScript plugin and dependency with one of our two bundles. Both `bootstrap.bundle.js` and `bootstrap.bundle.min.js` include [Popper](#) for our tooltips and popovers. For more information about what's included in Bootstrap, please see our [contents](#) section." Below this is another code block with the following HTML snippet:

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js">
```

 A "Copy" button is also present next to this code. On the left side of the page, there is a sidebar with a "Getting started" section containing links to "Introduction", "Download", "Contents", "Browsers & devices", "JavaScript", "Build tools", "Webpack", "Parcel", "Accessibility", "RFS", and "RTL". Below this is a "Customize" section with links to "Layout" and "Content". On the right side, there is a "On this page" section with a "Quick start" subsection containing links to "CSS", "JS", "Bundle", "Separate", "Modules", and "Components". Below this are links for "Starter template", "Important globals", "HTML5 doctype", "Responsive meta tag", "Box-sizing", "Reboot", and "Community".

Search docs... Ctrl + / Bootstrap v5.0

CSS

Copy-paste the stylesheet `<link>` into your `<head>` before all other stylesheets to load our CSS.

```
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css">
```

JS

Many of our components require the use of JavaScript to function. Specifically, they require our own JavaScript plugins and [Popper](#). Place **one of the following** `<script>`s near the end of your pages, right before the closing `</body>` tag, to enable them.

Bundle

Include every Bootstrap JavaScript plugin and dependency with one of our two bundles. Both `bootstrap.bundle.js` and `bootstrap.bundle.min.js` include [Popper](#) for our tooltips and popovers. For more information about what's included in Bootstrap, please see our [contents](#) section.

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js">
```

On this page

Quick start

- CSS
- JS
- Bundle
- Separate
- Modules
- Components

Starter template


Important globals

- HTML5 doctype
- Responsive meta tag
- Box-sizing
- Reboot

Community

Link: <https://getbootstrap.com/docs/5.0/getting-started/introduction/>

2 – Place *Bootstrap* in our Project (*Offline*)

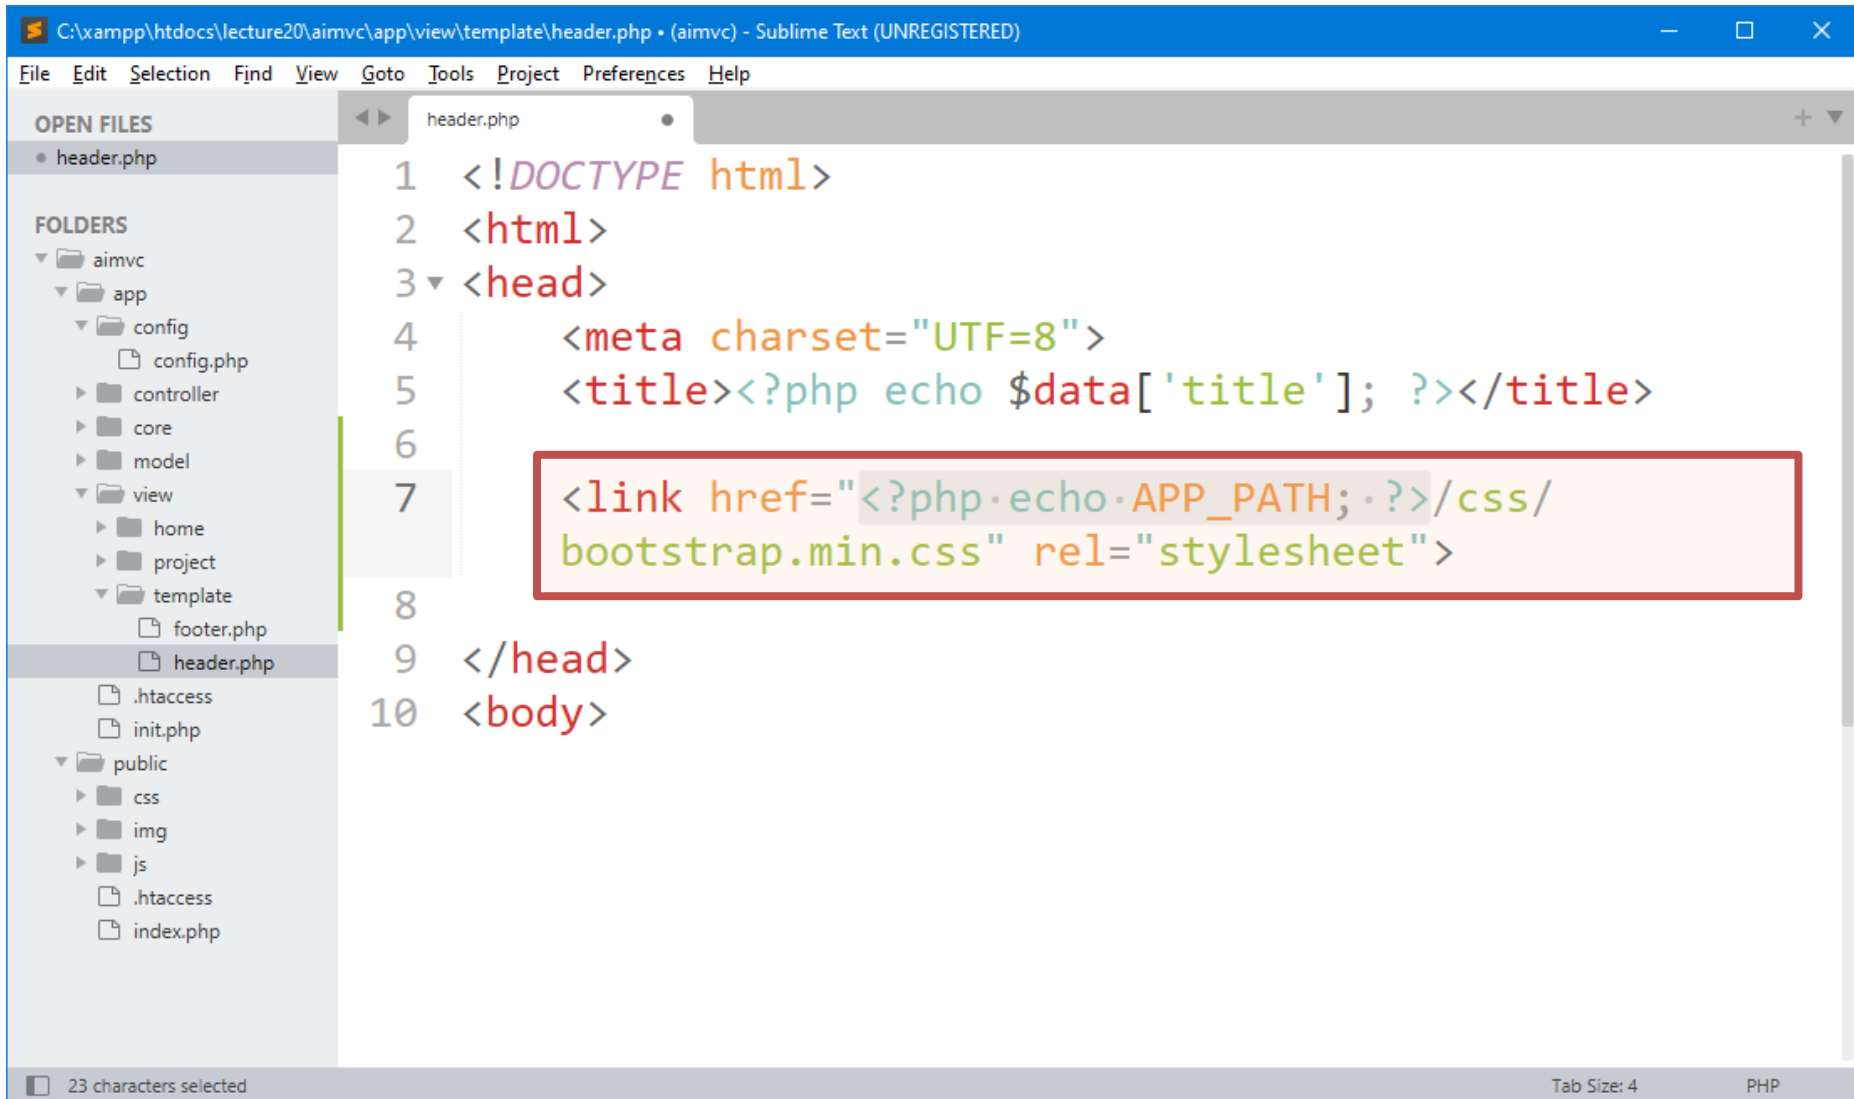


The screenshot shows the Sublime Text editor interface with the file `header.php` open. The editor displays the following PHP code:

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4     <meta charset="UTF=8">
5     <title><?php echo $data['title']; ?></title>
6
7     <link href="<?php·echo·APP_PATH;·?>/css/
8       bootstrap.min.css" rel="stylesheet">
9
10 </head>
11 <body>
```

The code on line 7 is highlighted with a red rectangular box. The left sidebar shows the project structure with folders like `aimvc`, `app`, `config`, `controller`, `core`, `model`, `view`, `home`, `project`, `template`, `public`, `css`, `img`, `js`, and files like `footer.php`, `header.php`, `.htaccess`, and `init.php`. The status bar at the bottom indicates "23 characters selected", "Tab Size: 4", and "PHP".

3 – Place *JavaScript* in our Project

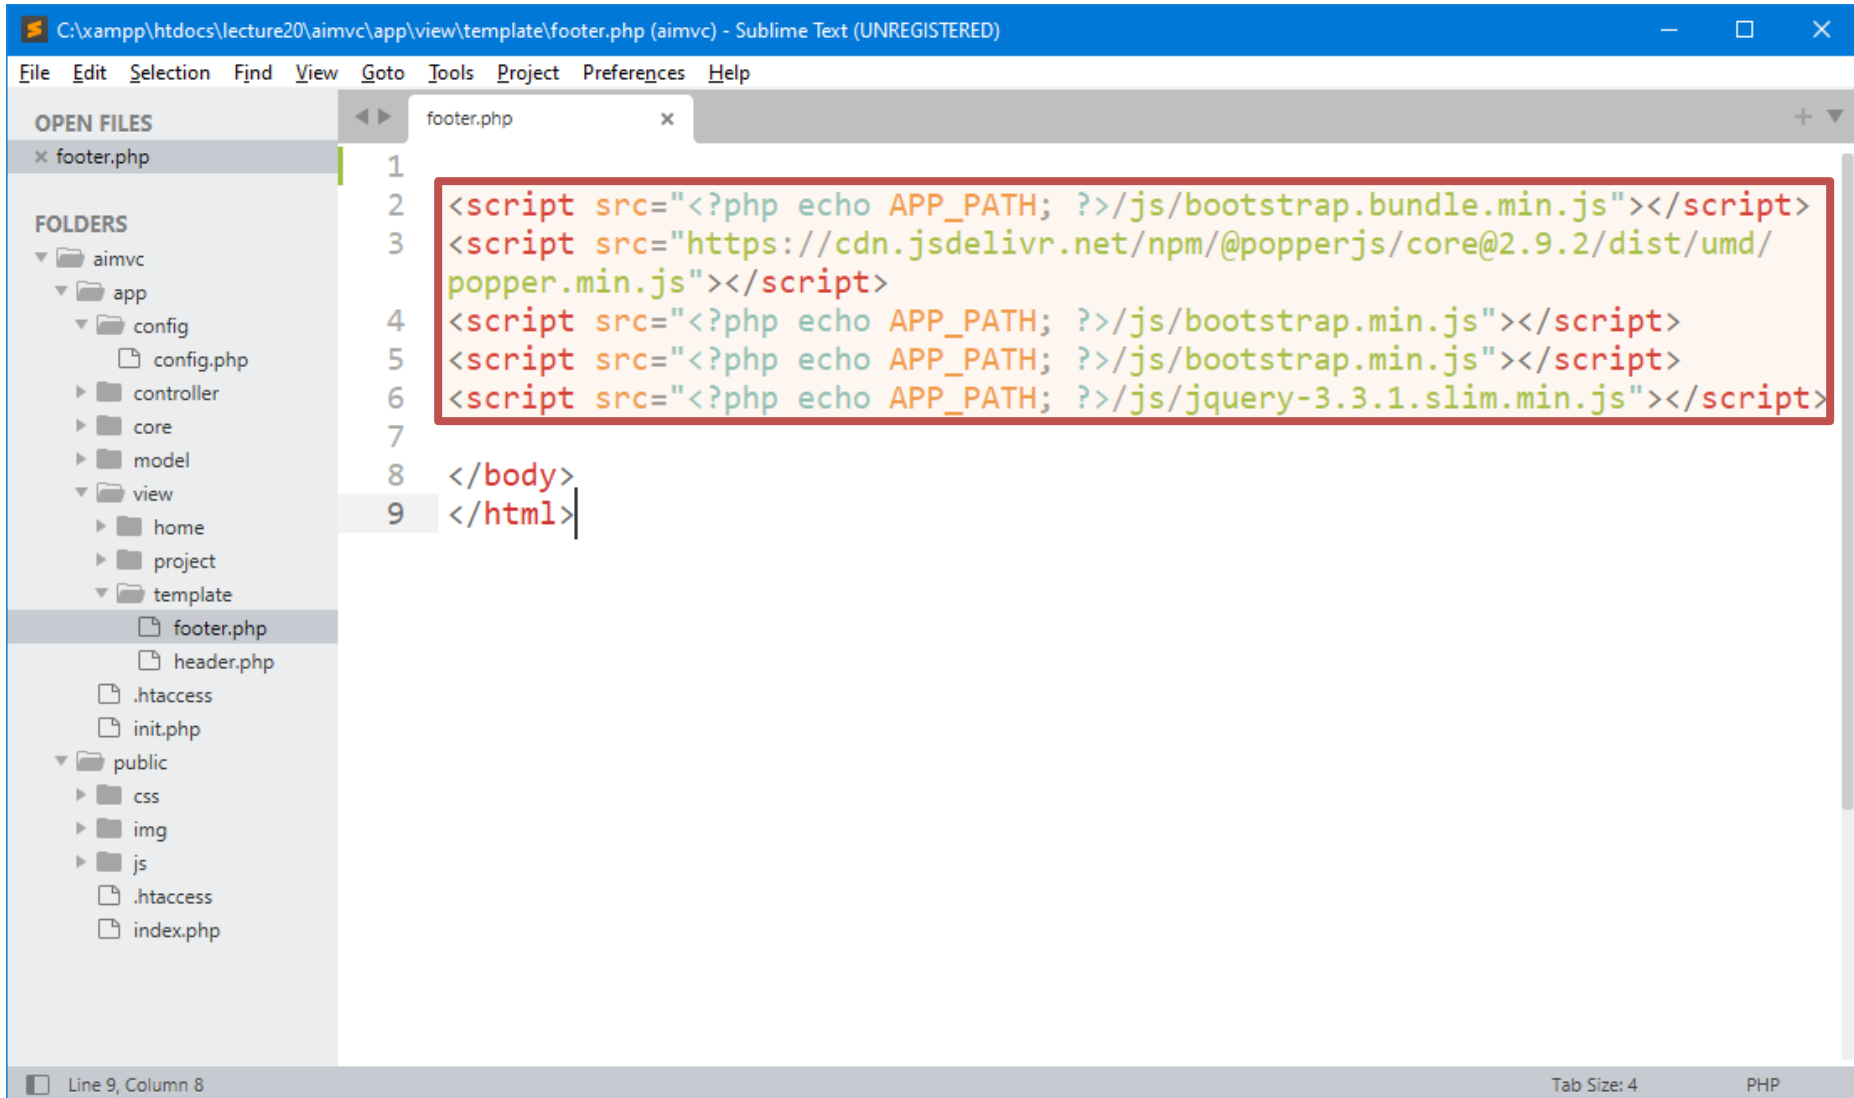


The screenshot shows a Sublime Text editor window titled "C:\xampp\htdocs\lecture20\aimvc\app\view\template\footer.php (aimvc) - Sublime Text (UNREGISTERED)". The editor displays the content of the footer.php file, which includes several JavaScript script tags for Bootstrap, Popper.js, and jQuery. The code is as follows:

```
1 <script src="<?php echo APP_PATH; ?>/js/bootstrap.bundle.min.js"></script>
2 <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/
3   popper.min.js"></script>
4 <script src="<?php echo APP_PATH; ?>/js/bootstrap.min.js"></script>
5 <script src="<?php echo APP_PATH; ?>/js/bootstrap.min.js"></script>
6 <script src="<?php echo APP_PATH; ?>/js/jquery-3.3.1.slim.min.js"></script>
7
8 </body>
9 </html>
```

The first three lines of code are highlighted with a red border. The left sidebar shows the project structure, including folders like aimvc, app, config, controller, core, model, view, and public, and files like footer.php, header.php, .htaccess, init.php, and index.php. The status bar at the bottom indicates "Line 9, Column 8", "Tab Size: 4", and "PHP".

4 – Testing

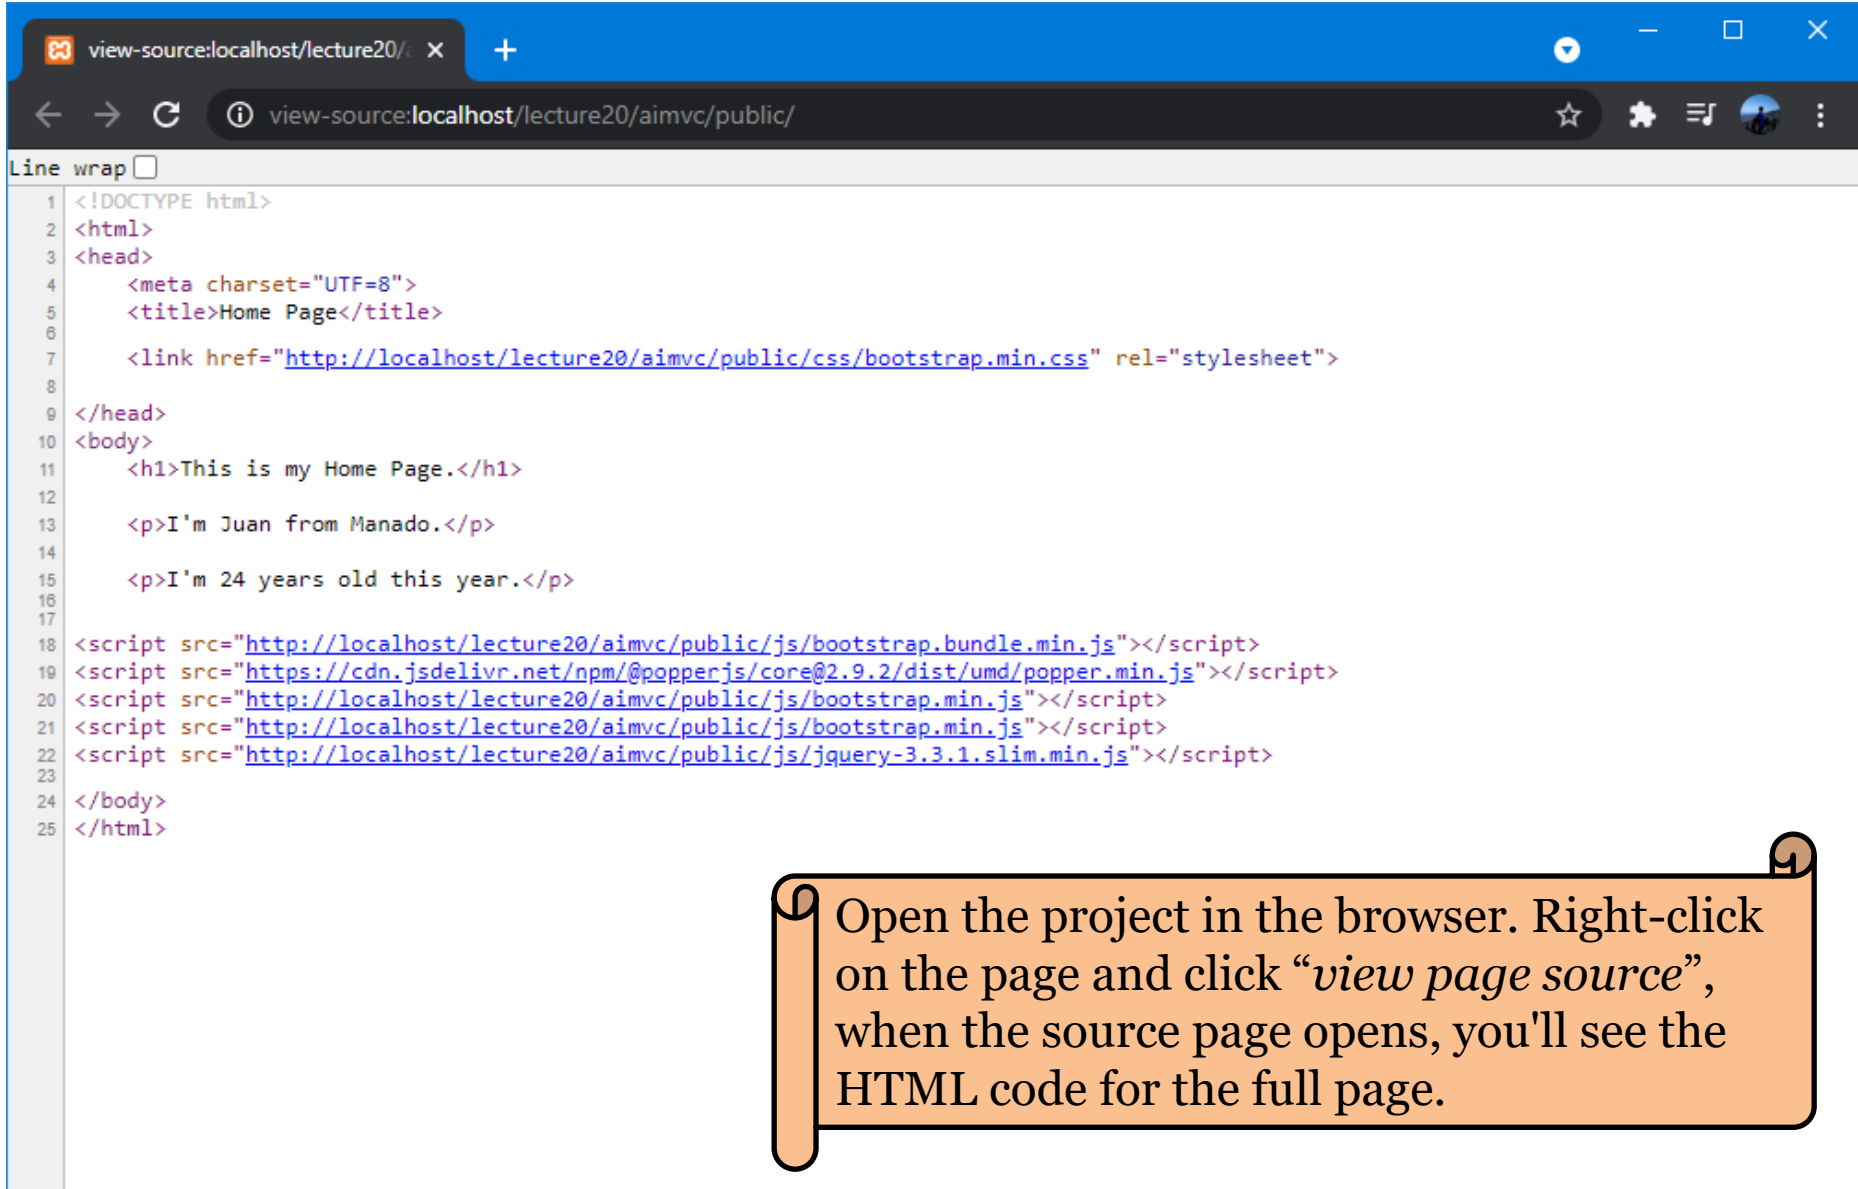

The screenshot shows a web browser window with the address bar displaying `view-source:localhost/lecture20/aimvc/public/`. The page content is the source code of an HTML document. The code includes a DOCTYPE declaration, a title "Home Page", and a link to Bootstrap CSS. The body contains an h1 heading "This is my Home Page.", two paragraphs "I'm Juan from Manado." and "I'm 24 years old this year.", and several script tags for Bootstrap bundle, Popper.js, and jQuery.

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <meta charset="UTF-8">
5   <title>Home Page</title>
6
7   <link href="http://localhost/lecture20/aimvc/public/css/bootstrap.min.css" rel="stylesheet">
8
9 </head>
10 <body>
11   <h1>This is my Home Page.</h1>
12
13   <p>I'm Juan from Manado.</p>
14
15   <p>I'm 24 years old this year.</p>
16
17
18 <script src="http://localhost/lecture20/aimvc/public/js/bootstrap.bundle.min.js"></script>
19 <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js"></script>
20 <script src="http://localhost/lecture20/aimvc/public/js/bootstrap.min.js"></script>
21 <script src="http://localhost/lecture20/aimvc/public/js/bootstrap.min.js"></script>
22 <script src="http://localhost/lecture20/aimvc/public/js/jquery-3.3.1.slim.min.js"></script>
23
24 </body>
25 </html>
```


Open the project in the browser. Right-click on the page and click “*view page source*”, when the source page opens, you'll see the HTML code for the full page.

A decorative border of green leaves and branches at the top of the page.

4 – Create *a* Simple Bootstrap Page with navigation header (*Navbar*)

A decorative border of green leaves and branches at the bottom of the page.

1 – Find Example *Navbar* in Bootstrap

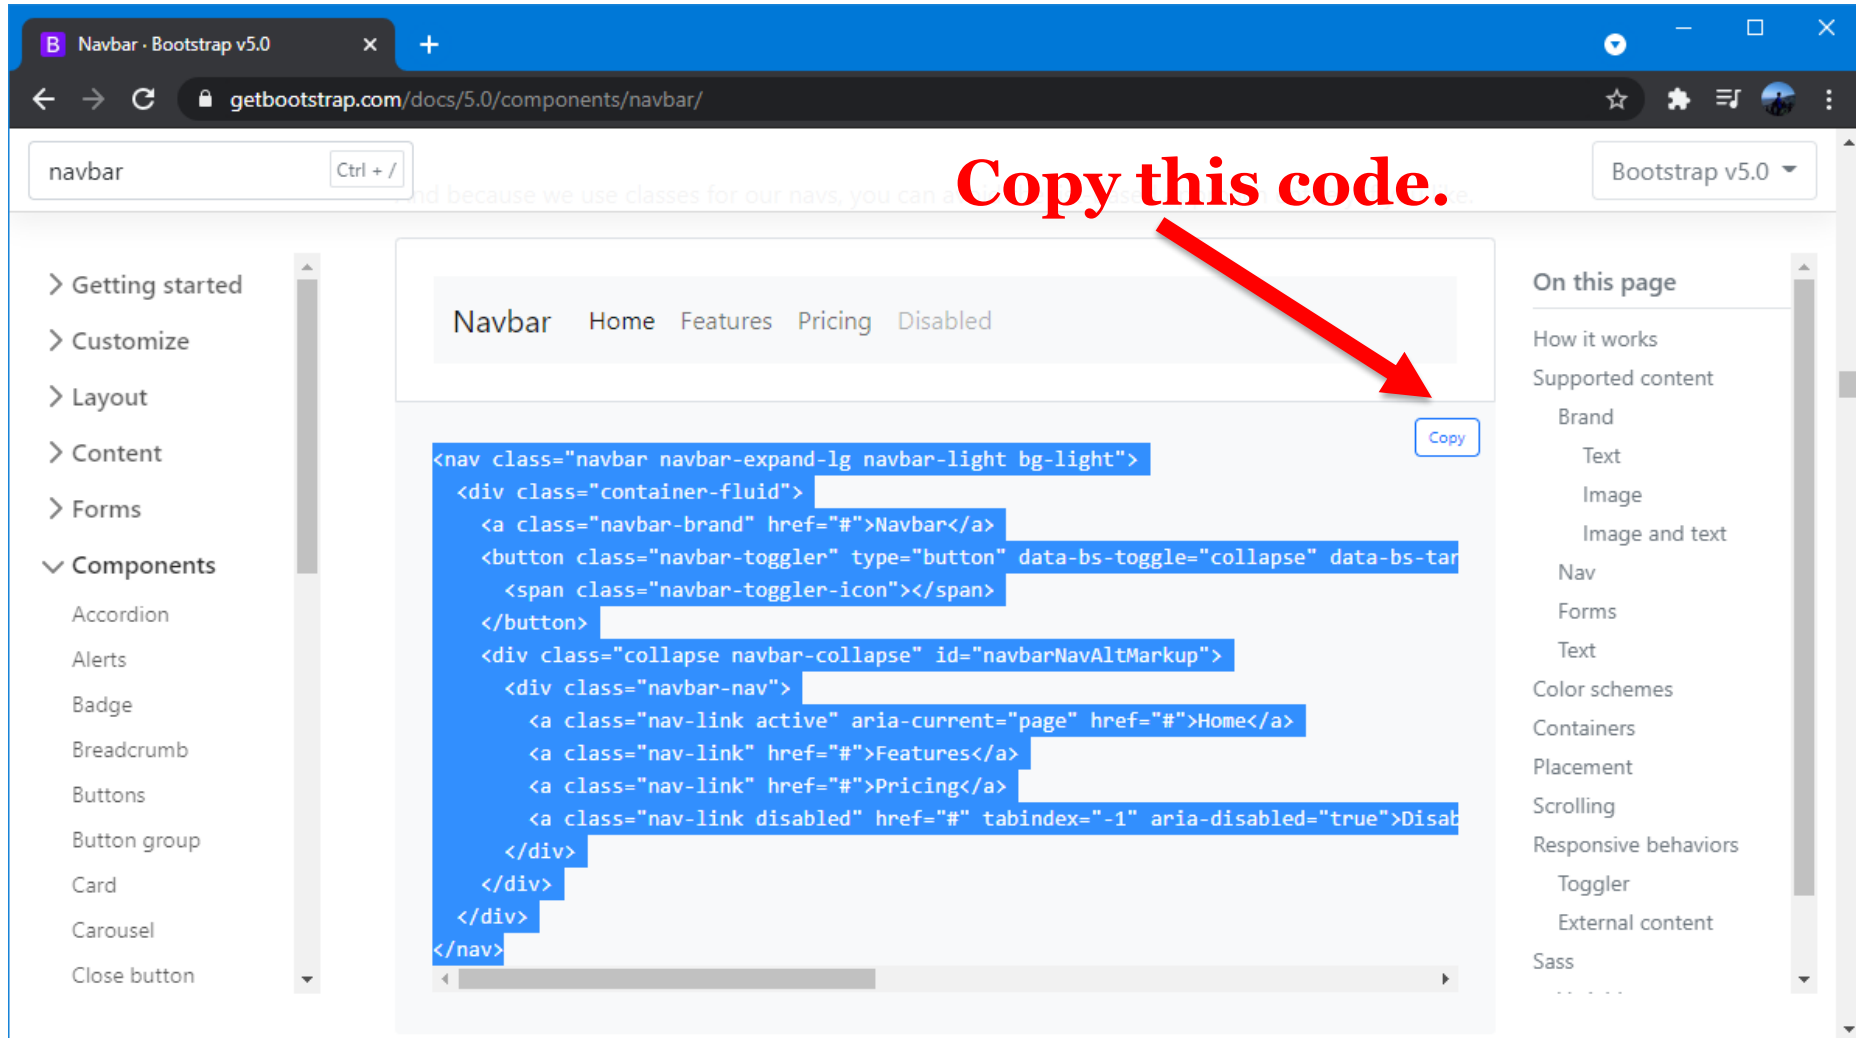

The screenshot shows the Bootstrap v5.0 documentation page for the Navbar component. The browser address bar shows the URL `getbootstrap.com/docs/5.0/components/navbar/`. The page title is "Navbar · Bootstrap v5.0". The search bar contains the text "navbar". The main content area displays a visual example of a navbar with links: "Navbar", "Home", "Features", "Pricing", and "Disabled". Below the visual example, the HTML code for the navbar is shown, highlighted in blue. A red arrow points from the text "Copy this code." to the code block. The code is as follows:


```
<nav class="navbar navbar-expand-lg navbar-light bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarNav" data-bs-keyboard="true" data-bs-aria-expanded="false">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarNav">
      <div class="navbar-nav">
        <a class="nav-link active" aria-current="page" href="#">Home</a>
        <a class="nav-link" href="#">Features</a>
        <a class="nav-link" href="#">Pricing</a>
        <a class="nav-link disabled" href="#" tabindex="-1" aria-disabled="true">Disabled</a>
      </div>
    </div>
  </div>
</nav>
```

The right sidebar, titled "On this page", lists various components and features, including "How it works", "Supported content", "Brand", "Text", "Image", "Image and text", "Nav", "Forms", "Text", "Color schemes", "Containers", "Placement", "Scrolling", "Responsive behaviors", "Toggler", "External content", and "Sass".

In column search, you can find Navbar or follow this link:

Link: <https://getbootstrap.com/docs/5.0/components/navbar/>

2 – Add Navbar in *header.php*

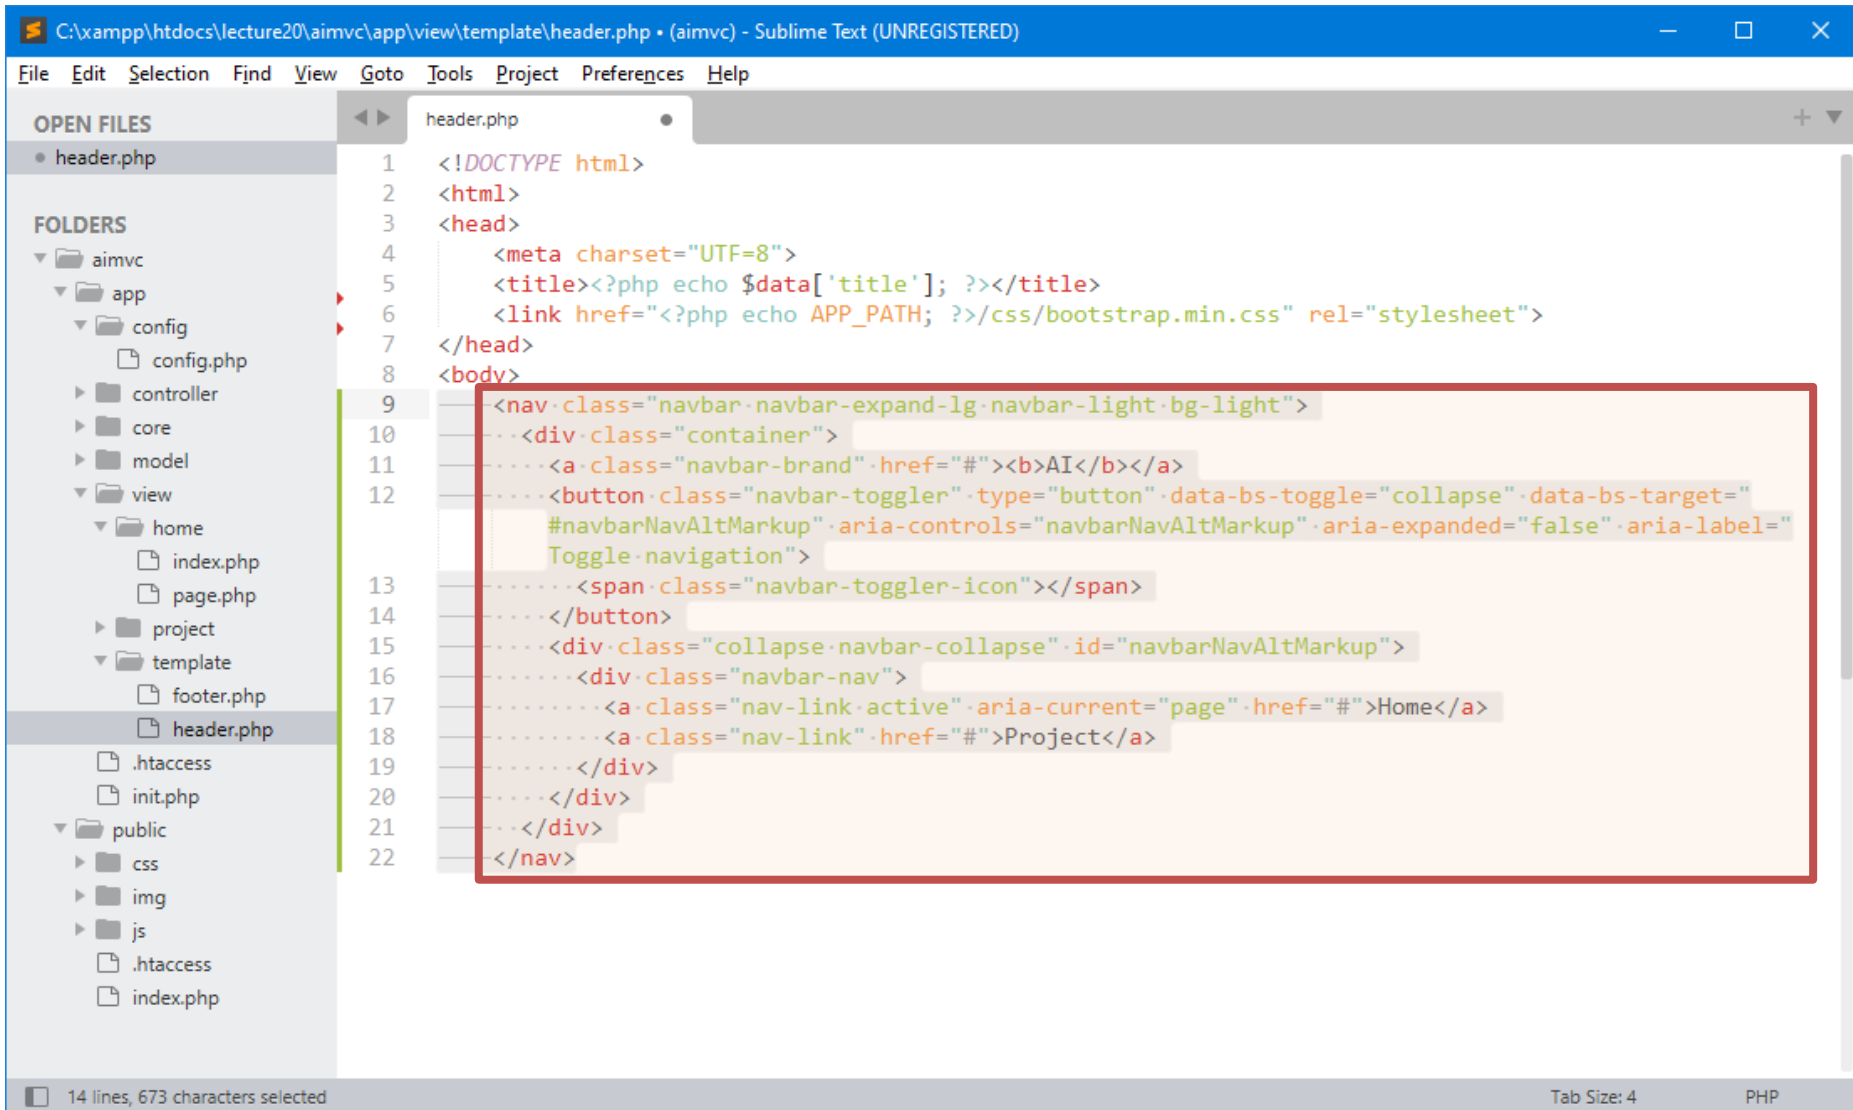


The screenshot shows a Sublime Text editor window titled "C:\xampp\htdocs\lecture20\aimvc\app\view\template\header.php • (aimvc) - Sublime Text (UNREGISTERED)". The editor displays the content of `header.php`. The left sidebar shows the project structure with folders like `aimvc`, `app`, `config`, `controller`, `core`, `model`, `view`, `home`, `project`, `template`, `public`, `css`, `img`, and `js`. The `header.php` file is open in the editor. The code shows the HTML head and body tags. A new navbar is being added to the body, highlighted by a red box. The navbar is a Bootstrap navbar with a light background and expandable behavior. It includes a container, a brand link, a toggler button, and a list of navigation links for Home and Project.

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4     <meta charset="UTF=8">
5     <title><?php echo $data['title']; ?></title>
6     <link href="<?php echo APP_PATH; ?>/css/bootstrap.min.css" rel="stylesheet">
7 </head>
8 <body>
9     <nav class="navbar navbar-expand-lg navbar-light bg-light">
10         <div class="container">
11             <a class="navbar-brand" href="#"><b>AI</b></a>
12             <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="
13                 #navbarNavAltMarkup" aria-controls="navbarNavAltMarkup" aria-expanded="false" aria-label="
14                 Toggle navigation">
15                 <span class="navbar-toggler-icon"></span>
16             </button>
17             <div class="collapse navbar-collapse" id="navbarNavAltMarkup">
18                 <div class="navbar-nav">
19                     <a class="nav-link active" aria-current="page" href="#">Home</a>
20                     <a class="nav-link" href="#">Project</a>
21                 </div>
22             </div>
23         </div>
24     </nav>
```

14 lines, 673 characters selected

Tab Size: 4 PHP

Please Check type of Bootstrap Containers

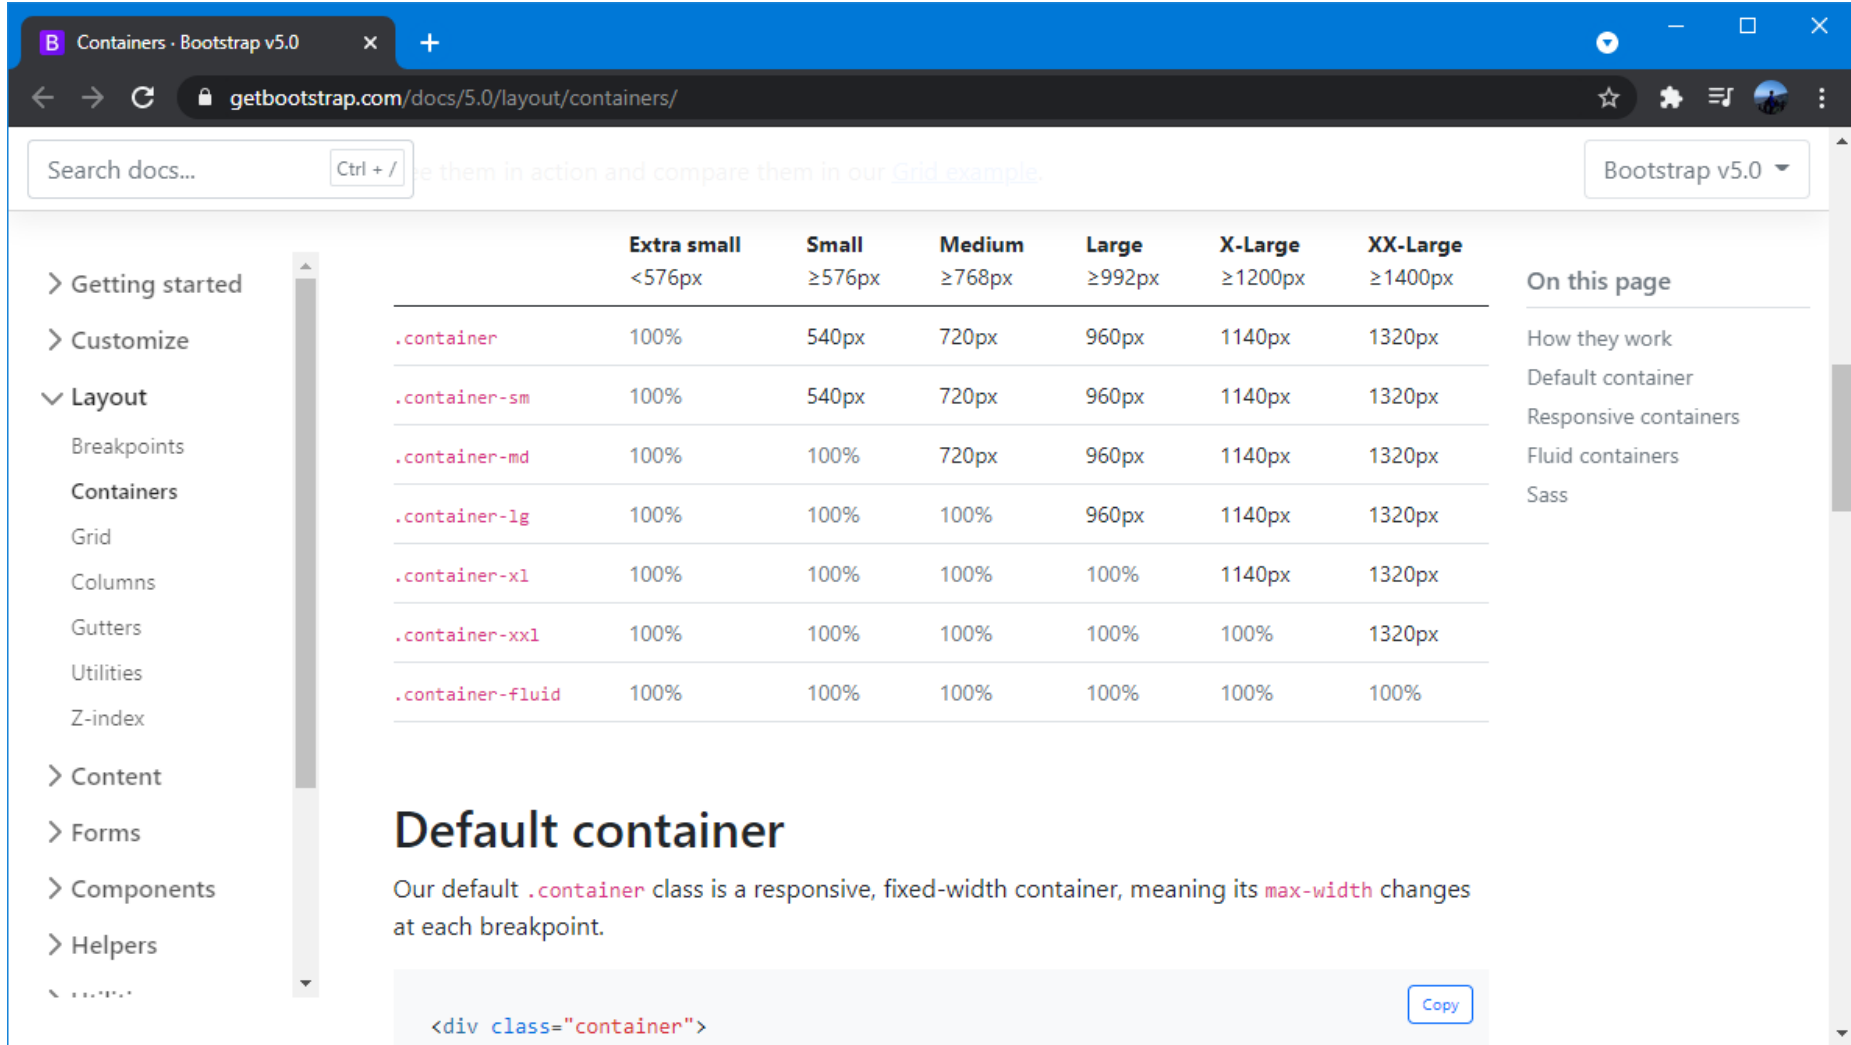

The screenshot shows the Bootstrap v5.0 documentation page for containers. The browser address bar shows the URL <https://getbootstrap.com/docs/5.0/layout/containers/>. The page features a search bar, a sidebar with navigation links, a table of container classes, and a section for the default container.

Search docs... Ctrl + / Bootstrap v5.0

Navigation links: > Getting started, > Customize, > Layout (selected), > Content, > Forms, > Components, > Helpers

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	X-Large ≥1200px	XX-Large ≥1400px
<code>.container</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-sm</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-md</code>	100%	100%	720px	960px	1140px	1320px
<code>.container-lg</code>	100%	100%	100%	960px	1140px	1320px
<code>.container-xl</code>	100%	100%	100%	100%	1140px	1320px
<code>.container-xxl</code>	100%	100%	100%	100%	100%	1320px
<code>.container-fluid</code>	100%	100%	100%	100%	100%	100%

Default container

Our default `.container` class is a responsive, fixed-width container, meaning its `max-width` changes at each breakpoint.

```
<div class="container">
```


[Copy](#)

On this page

- How they work
- Default container
- Responsive containers
- Fluid containers
- Sass

Link: <https://getbootstrap.com/docs/5.0/layout/containers/>

3 – Add Container in */view/home/index.php*

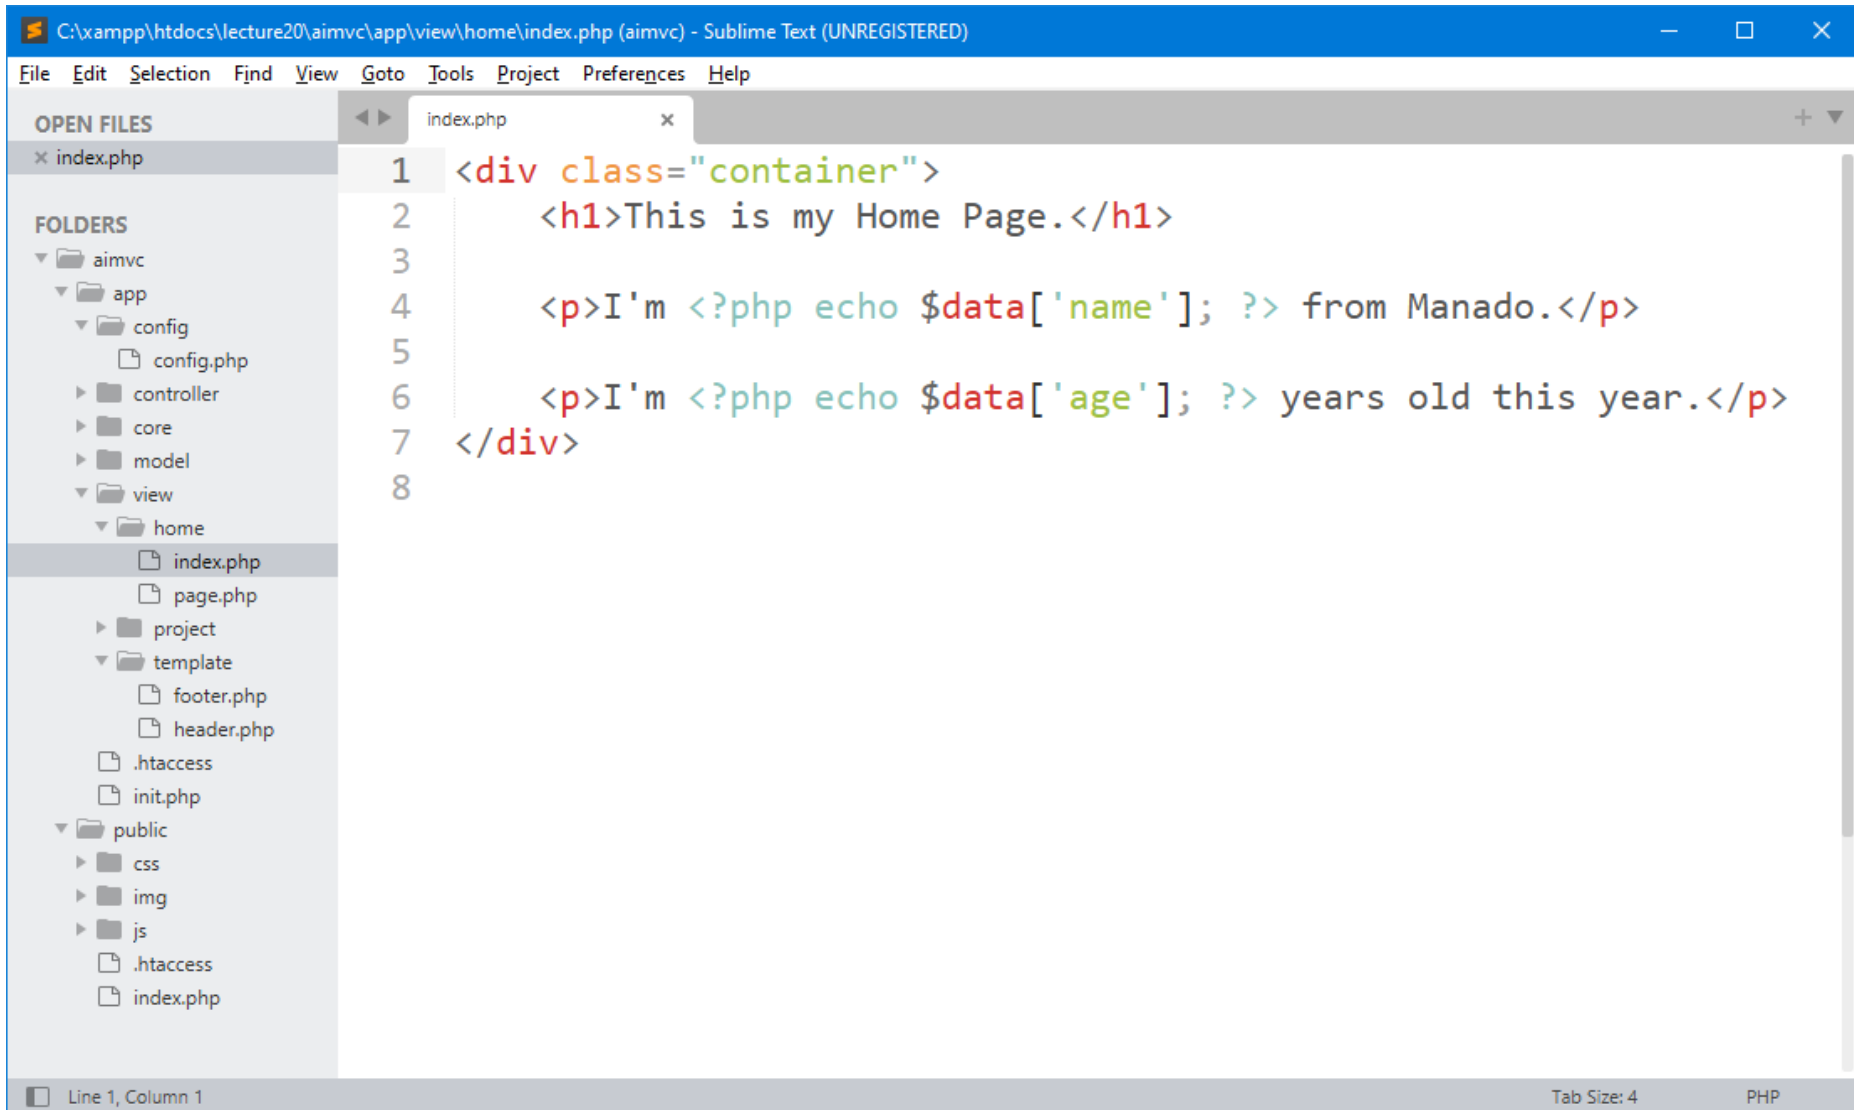


The screenshot shows the Sublime Text editor interface. The title bar indicates the file path is `C:\xampp\htdocs\lecture20\aimvc\app\view\home\index.php (aimvc) - Sublime Text (UNREGISTERED)`. The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, and Help. The left sidebar displays the 'FOLDERS' tree, with the 'home' folder expanded, showing 'index.php' as the active file. The main editor area shows the following PHP code:

```
1 <div class="container">
2     <h1>This is my Home Page.</h1>
3
4     <p>I'm <?php echo $data['name']; ?> from Manado.</p>
5
6     <p>I'm <?php echo $data['age']; ?> years old this year.</p>
7 </div>
8
```

The status bar at the bottom shows 'Line 1, Column 1', 'Tab Size: 4', and 'PHP'.

The **<div>** tag defines a *division* or a section in an HTML document.

4 – Testing

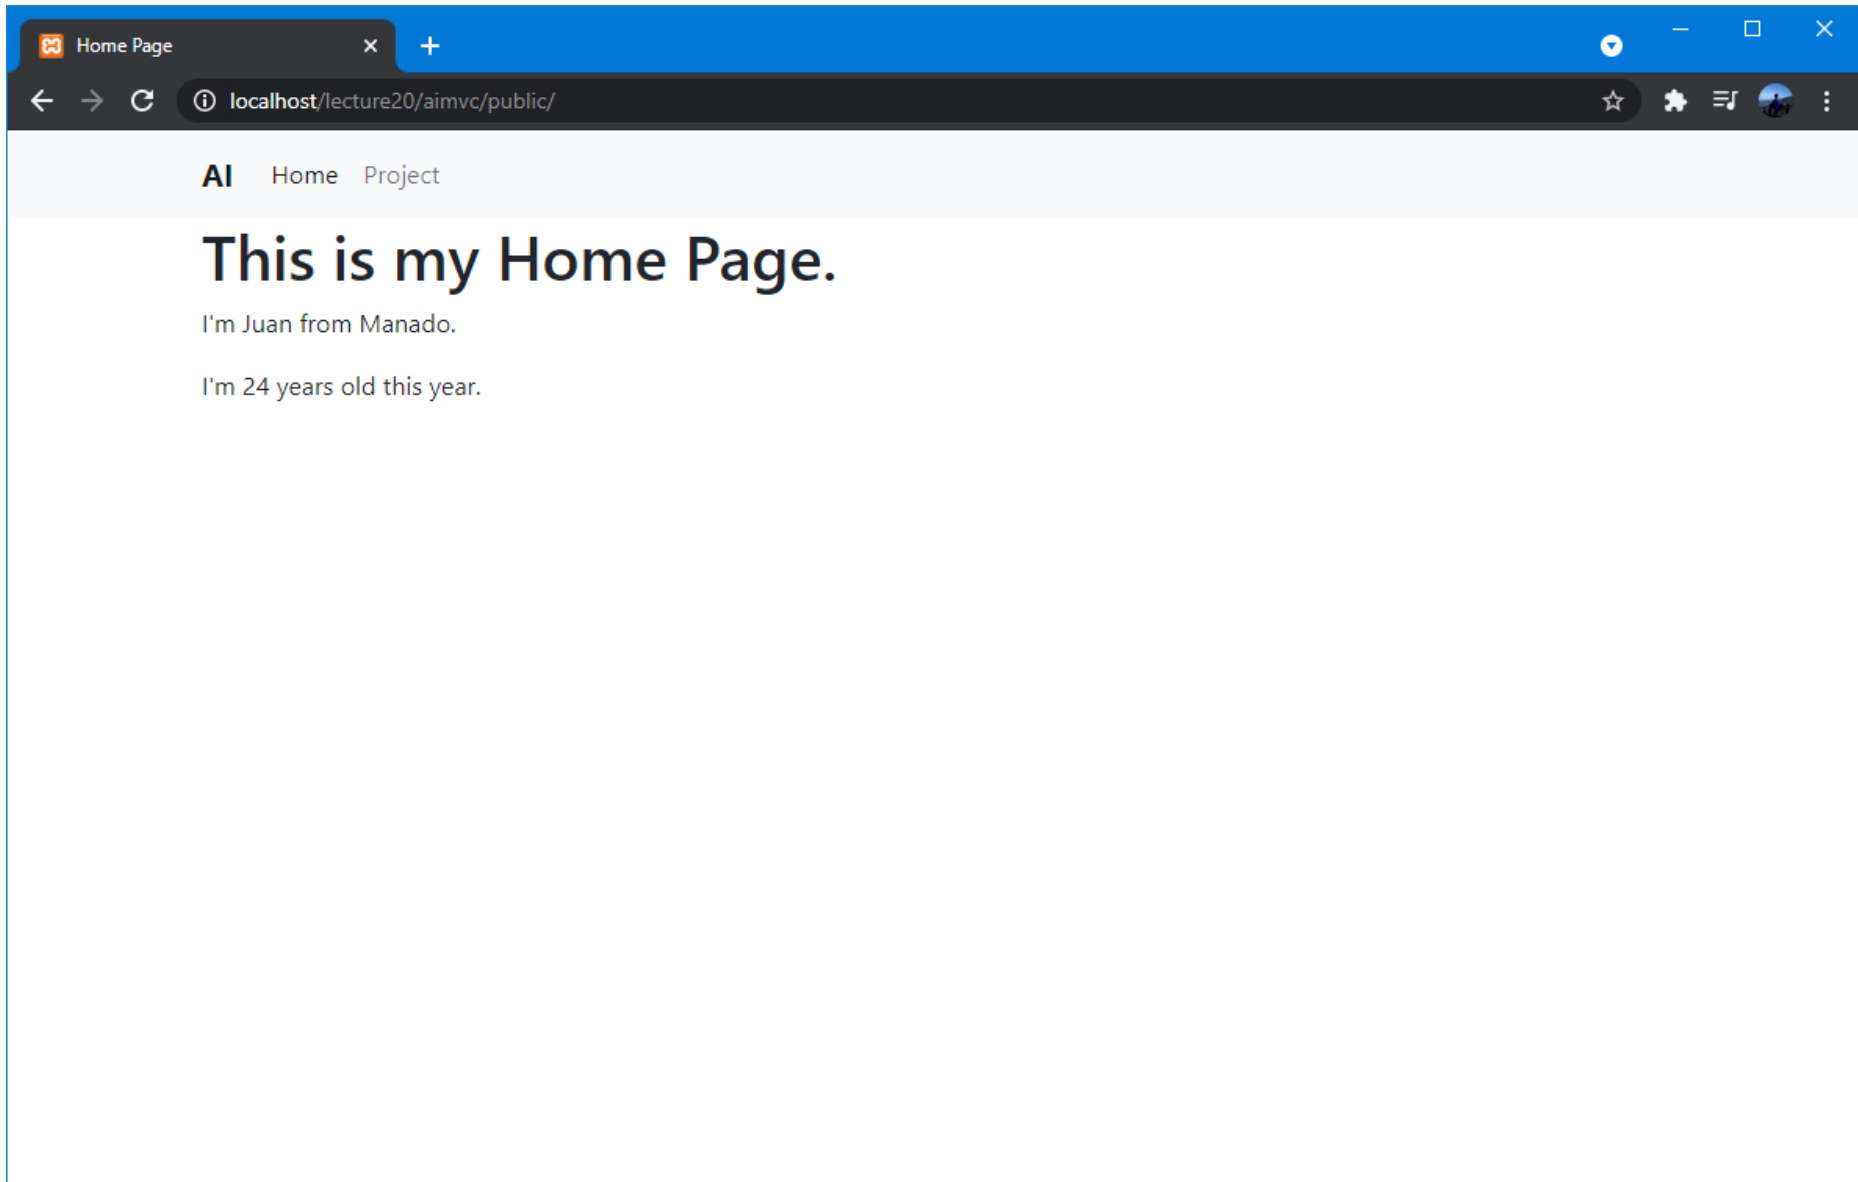

A decorative border of green leaves and branches at the top of the slide.

5 – Create *link* in navigation header (*Navbar*)

A decorative border of green leaves and branches at the bottom of the slide.

1 – All Link in Navbar

C:\xampp\htdocs\lecture20\aimvc\app\view\template\header.php (aimvc) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

OPEN FILES

- header.php

FOLDERS


- aimvc
 - app
 - config
 - config.php
 - controller
 - core
 - model
 - view
 - home
 - index.php
 - page.php
 - project
 - template
 - footer.php
 - header.php
 - public
 - css
 - img
 - js
 - .htaccess
 - index.php

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4     <meta charset="UTF-8">
5     <title><?php echo $data['title']; ?></title>
6     <link href="<?php echo APP_PATH; ?>/css/bootstrap.min.css" rel="stylesheet">
7 </head>
8 <body>
9     <nav class="navbar navbar-expand-lg navbar-light bg-light">
10         <div class="container">
11             <a class="navbar-brand" href="<?php echo APP_PATH; ?>"><b>AI</b></a>
12             <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="
#navbarNavAltMarkup" aria-controls="navbarNavAltMarkup" aria-expanded="false" aria-label="
Toggle navigation">
13                 <span class="navbar-toggler-icon"></span>
14             </button>
15             <div class="collapse navbar-collapse" id="navbarNavAltMarkup">
16                 <div class="navbar-nav">
17                     <a class="nav-link active" aria-current="page" href="<?php echo APP_PATH; ?>">Home</a>
18                     <a class="nav-link" href="<?php echo APP_PATH; ?>/home/page/">Page</a>
19                     <a class="nav-link" href="<?php echo APP_PATH; ?>/project/">Project</a>
20                 </div>
21             </div>
22         </div>
23     </nav>
```

4 selection regions

Tab Size: 4 PHP

2 – Don't forget add *container* in *page.php* file

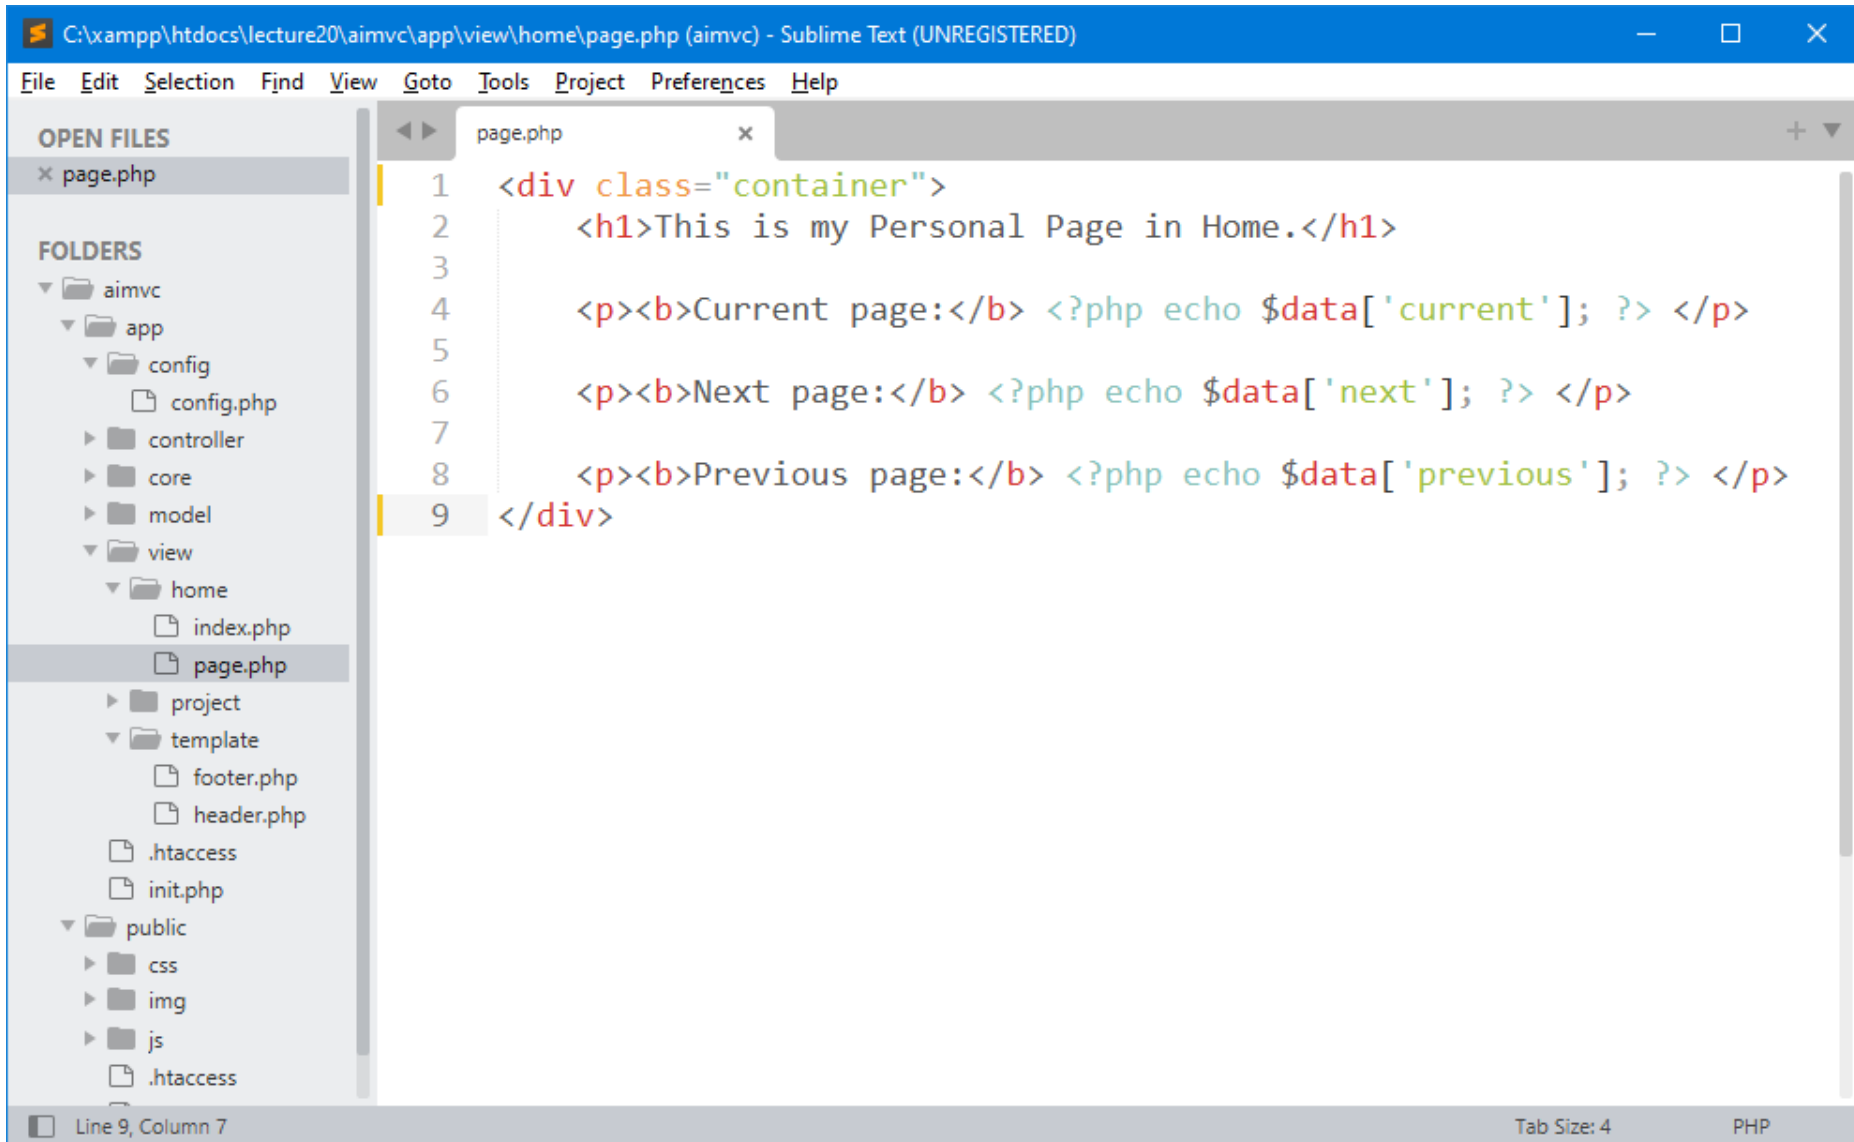

```
C:\xampp\htdocs\lecture20\aimvc\app\view\home\page.php (aimvc) - Sublime Text (UNREGISTERED)
```

File Edit Selection Find View Goto Tools Project Preferences Help

OPEN FILES

- page.php

FOLDERS


- aimvc
 - app
 - config
 - config.php
 - controller
 - core
 - model
 - view
 - home
 - index.php
 - page.php
 - project
 - template
 - footer.php
 - header.php
 - .htaccess
 - init.php
 - public
 - css
 - img
 - js
 - .htaccess

```
1 <div class="container">
2     <h1>This is my Personal Page in Home.</h1>
3
4     <p><b>Current page:</b> <?php echo $data['current']; ?> </p>
5
6     <p><b>Next page:</b> <?php echo $data['next']; ?> </p>
7
8     <p><b>Previous page:</b> <?php echo $data['previous']; ?> </p>
9 </div>
```

Line 9, Column 7

Tab Size: 4 PHP


3 – Testing

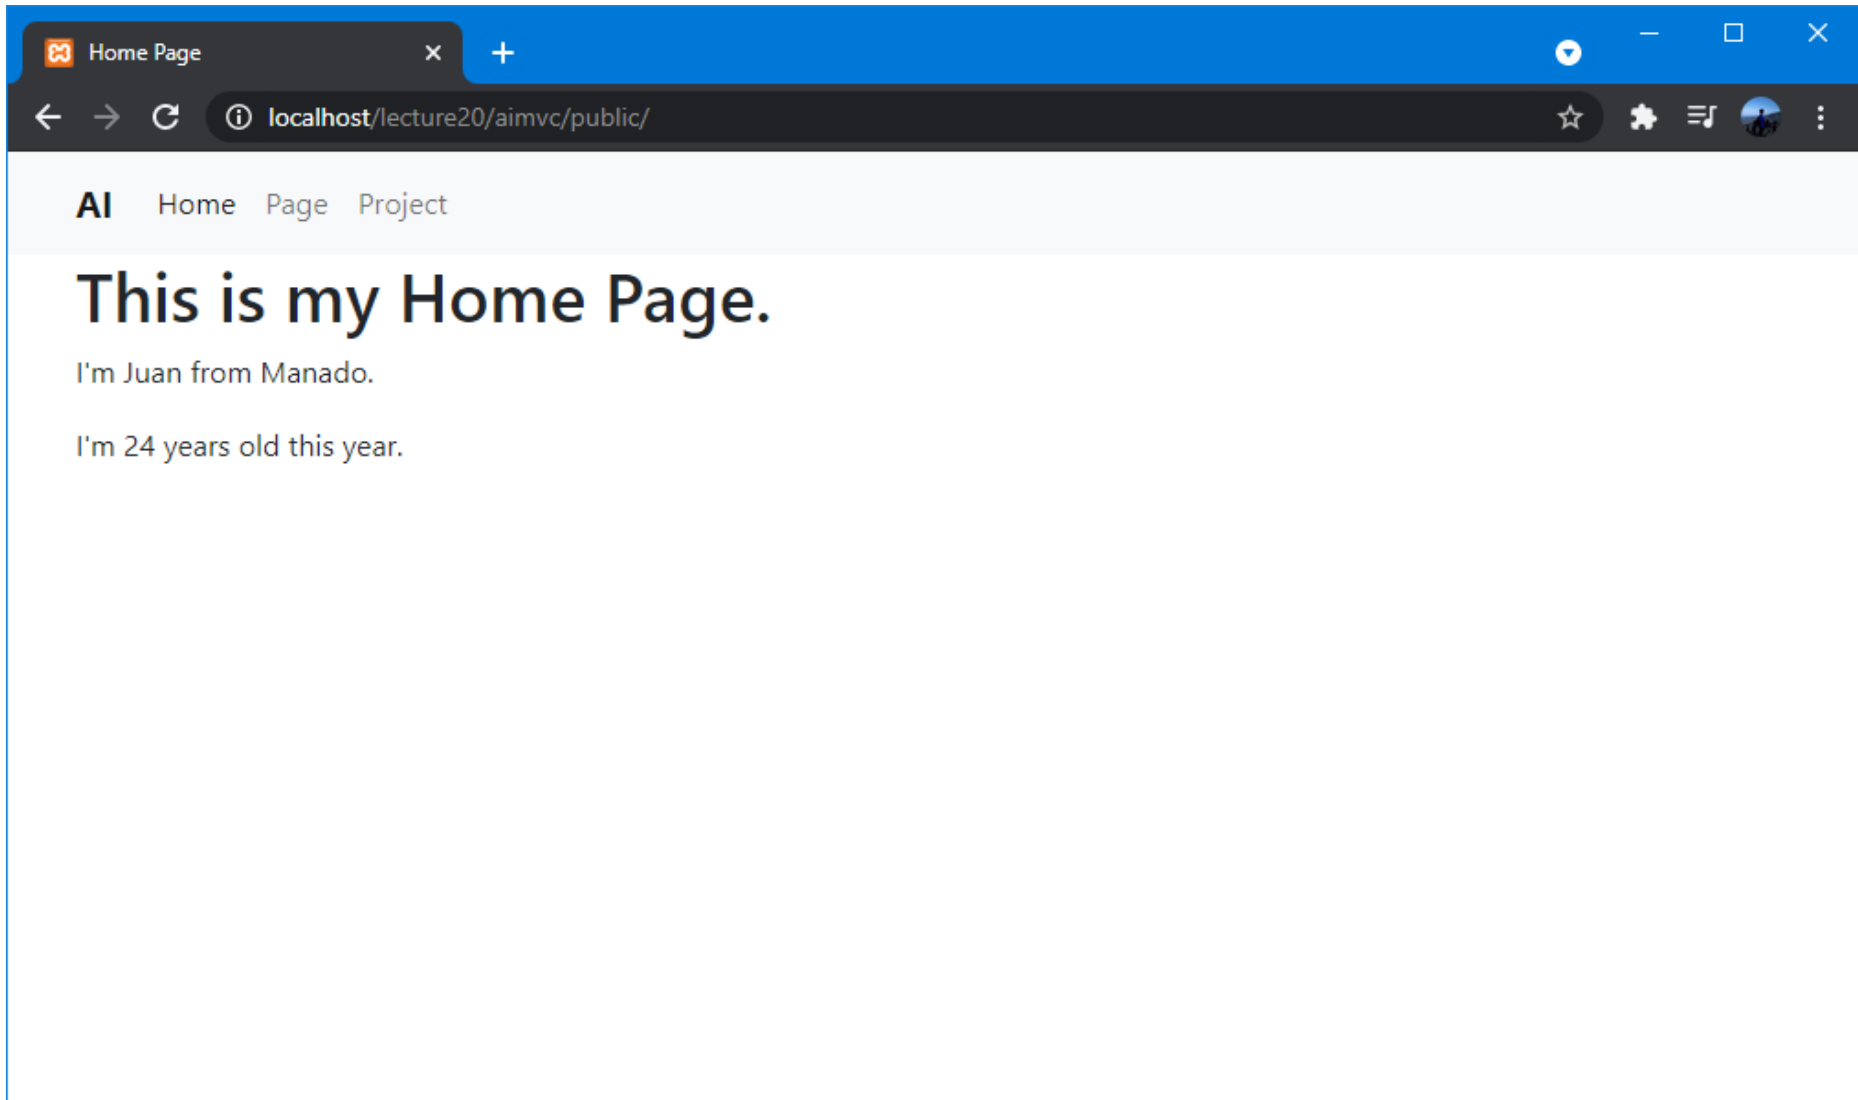


The image features a white background with green leaves framing the top and bottom edges. The leaves are vibrant green and appear to be from a tree or shrub. In the center of the white area, the text "5 – Add Image" is displayed in a black, serif font.

5 – Add Image

1 – Add an image in *img* directory

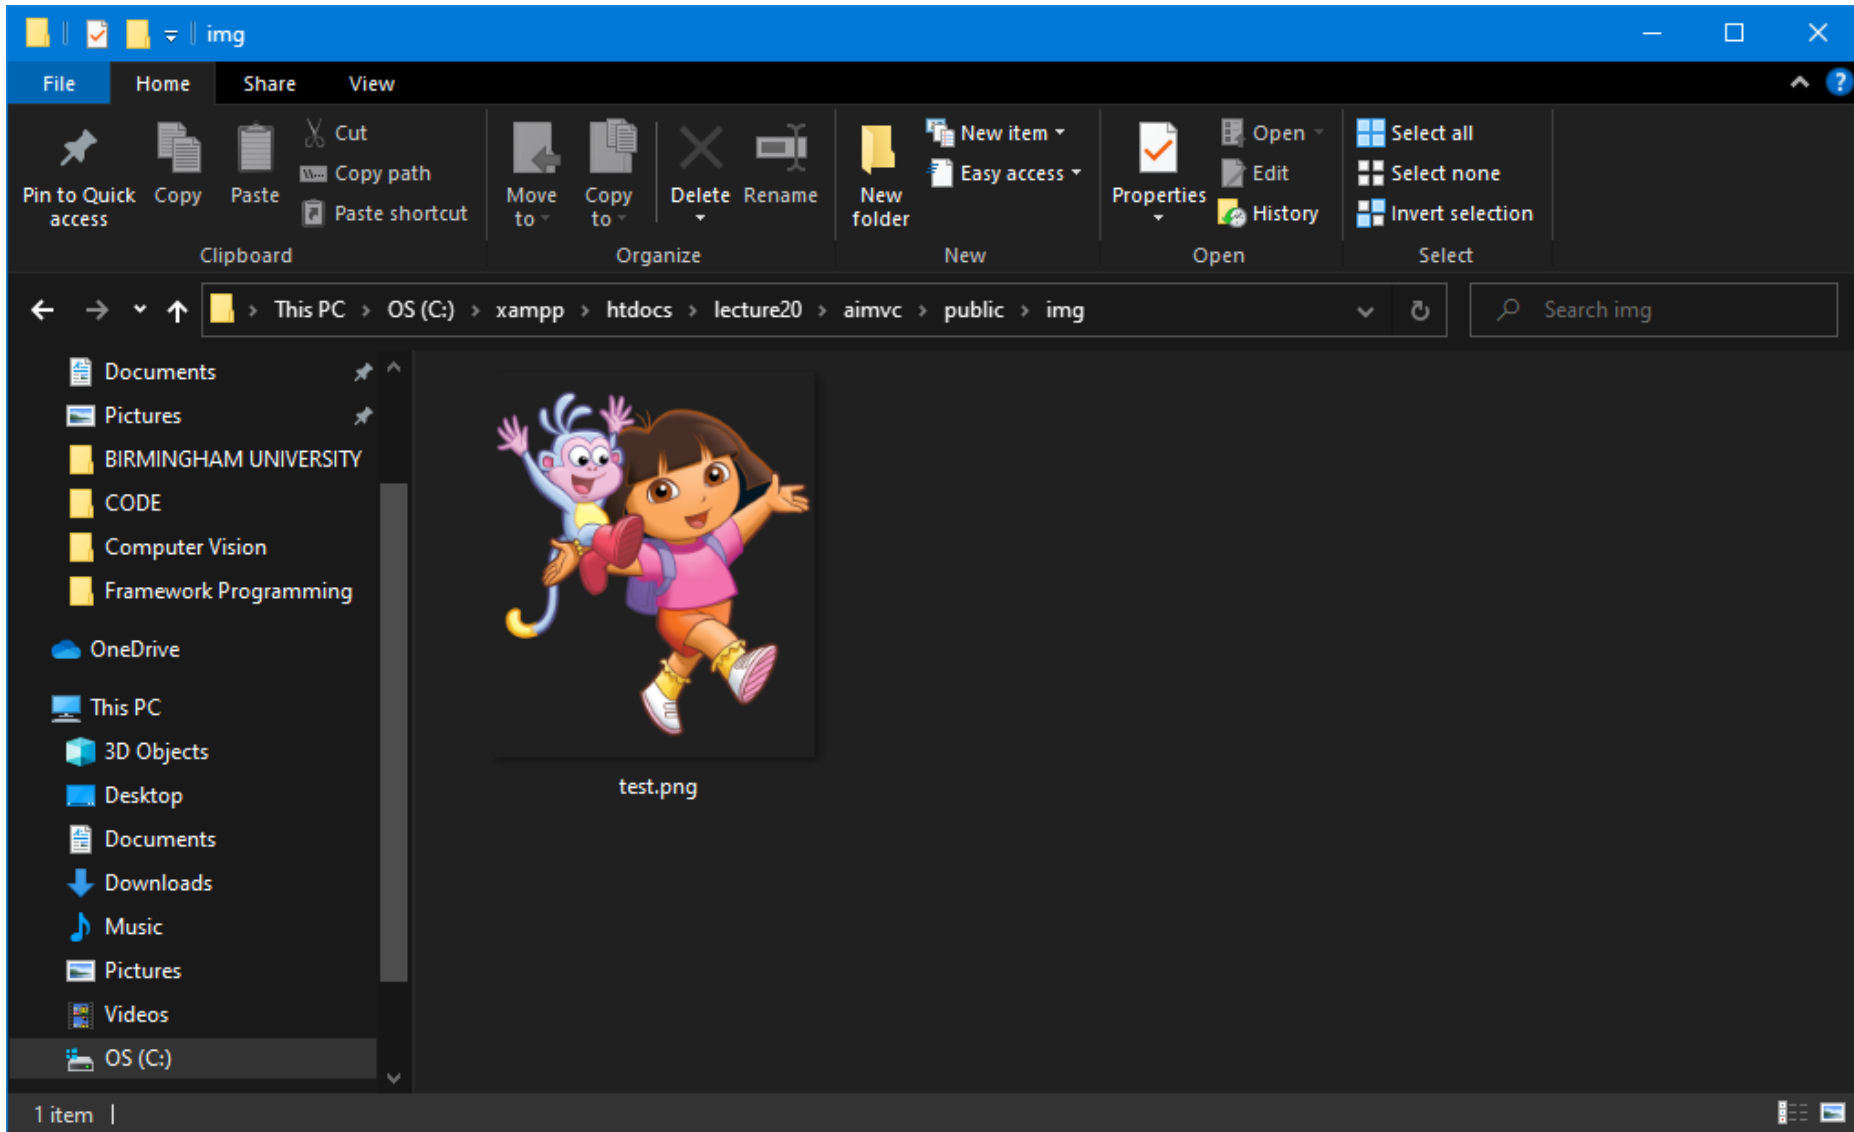

2 – Add *img* Tag in *your* Script

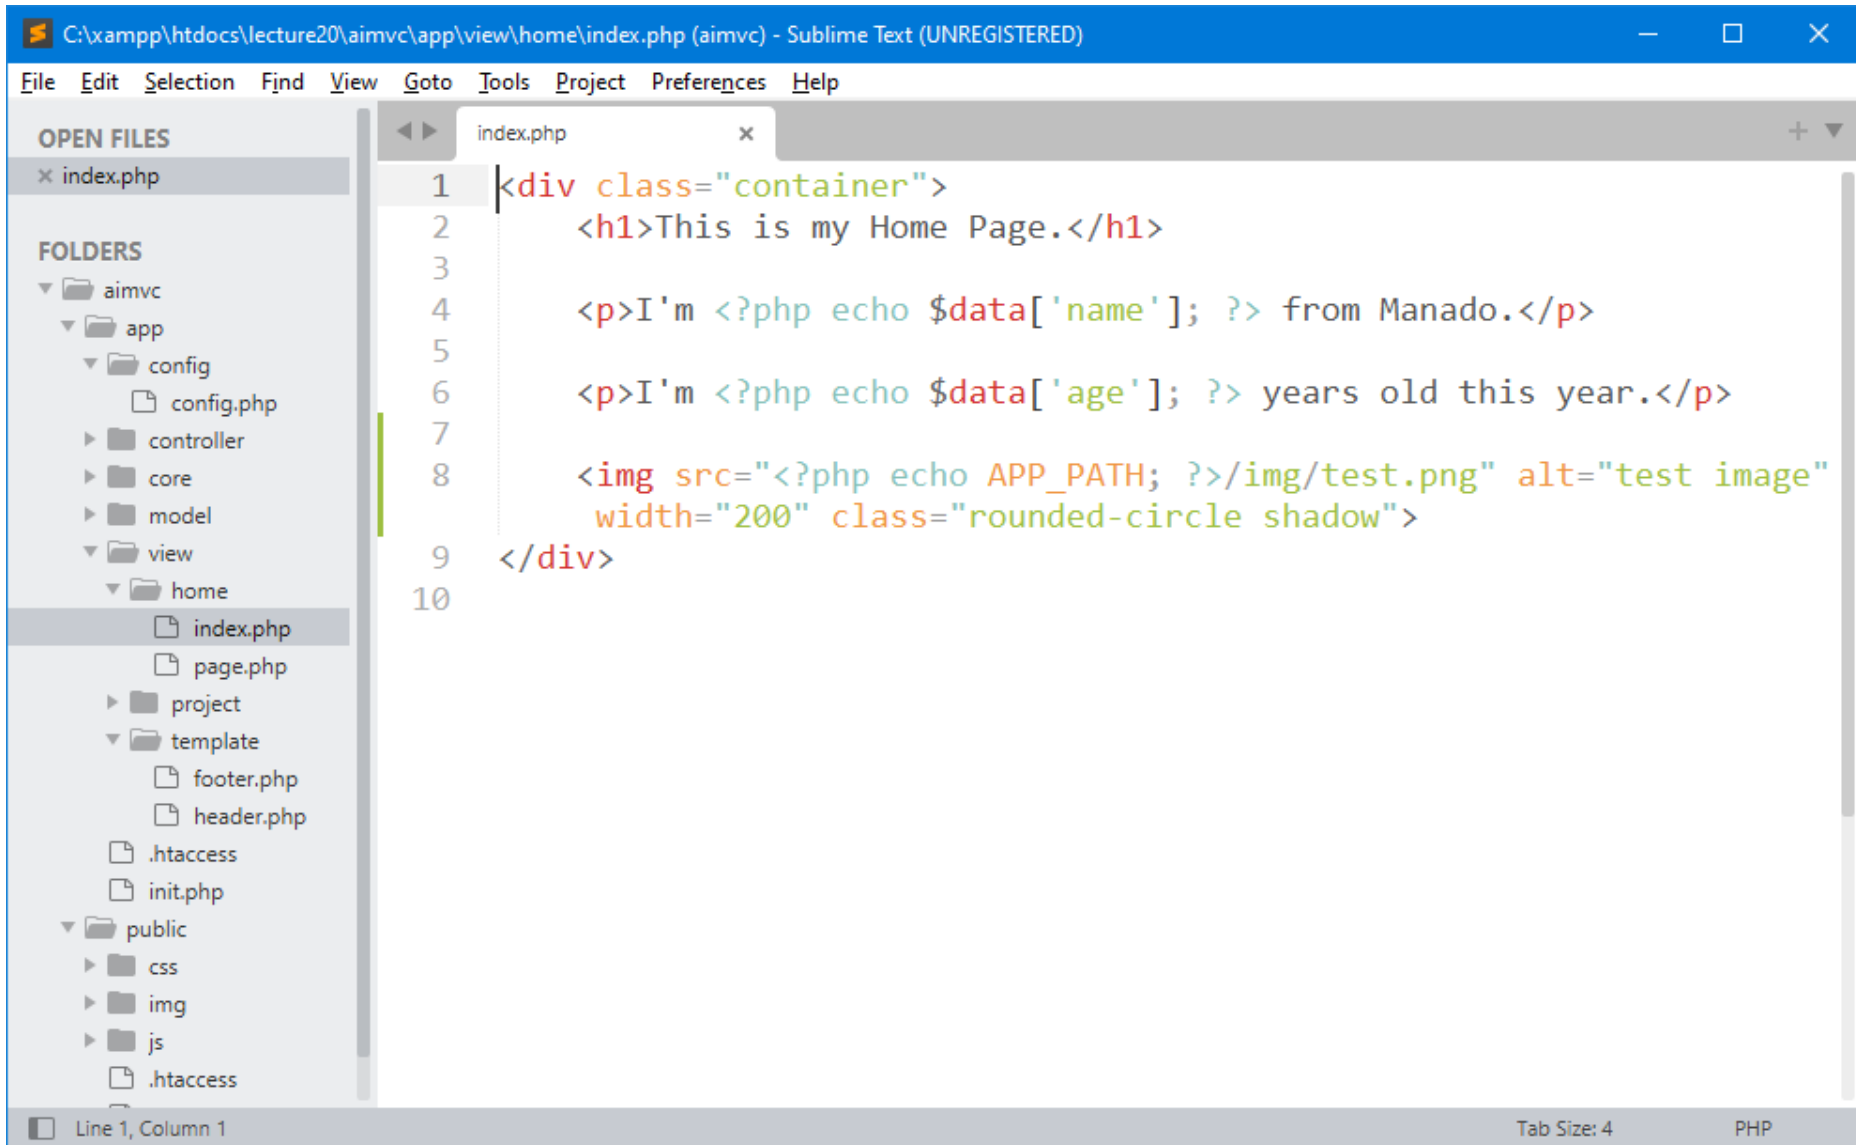


The screenshot shows a Sublime Text editor window titled "C:\xampp\htdocs\lecture20\aimvc\app\view\home\index.php (aimvc) - Sublime Text (UNREGISTERED)". The editor is displaying a PHP script in a file named "index.php". The script contains HTML and PHP code. The left sidebar shows the "OPEN FILES" and "FOLDERS" panels. The "FOLDERS" panel shows a directory structure for "aimvc" with subdirectories "app", "config", "controller", "core", "model", "view", and "public". The "view" directory is expanded, showing "home" and "index.php". The "index.php" file is selected. The main editor area shows the following code:

```
1 <div class="container">
2   <h1>This is my Home Page.</h1>
3
4   <p>I'm <?php echo $data['name']; ?> from Manado.</p>
5
6   <p>I'm <?php echo $data['age']; ?> years old this year.</p>
7
8   
10 </div>
```

The status bar at the bottom indicates "Line 1, Column 1", "Tab Size: 4", and "PHP".

3 – Testing

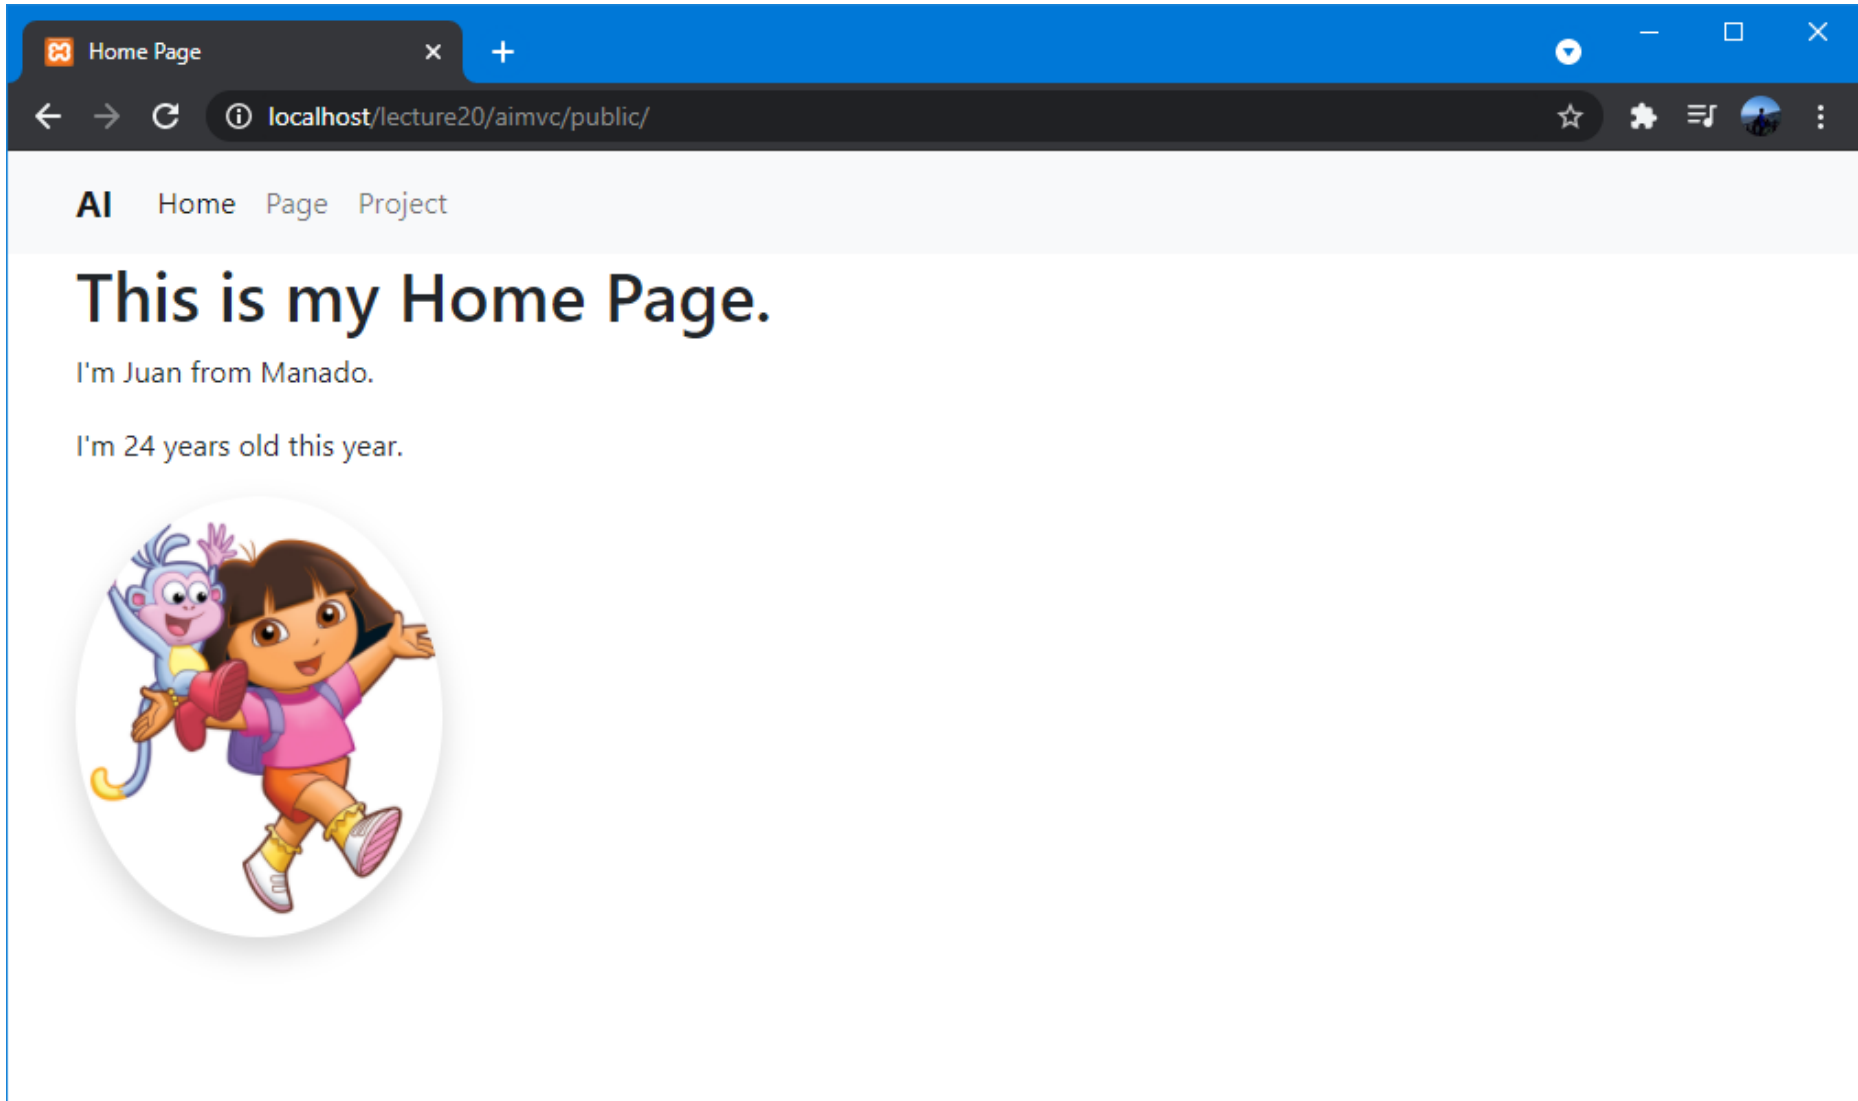



Exercise *for* Students

Latihan untuk *Students*

Create directory : C:\xampp\htdocs\lecture20\
Create file : `_.php`

Buat semua contoh yang sudah di pelajari sebelumnya di *lecture* ini.

END PRESENTATION

Thank you for your attention

Instructor: S – W – T

THANK YOU

