JavaScript is disabled on your browser.

1. Description
2. Constructor Summary
3. Method Summary
4. Constructor Details
    1. IllegalClassFormatException()
    2. IllegalClassFormatException(String)


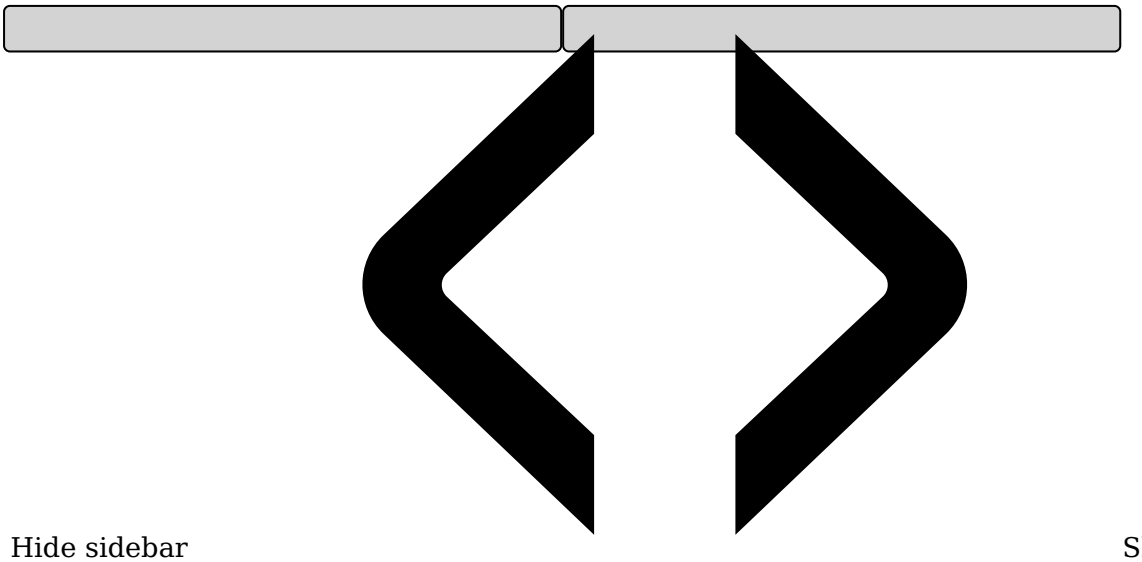



# Class IllegalClassFormatException

java.lang.Object
java.lang.Throwable
java.lang.Exception
java.lang.instrument.IllegalClassFormatException

All Implemented Interfaces:
`Serializable`

---

public class IllegalClassFormatException extends Exception

Thrown by an implementation of `ClassFileTransformer.transform` when its input parameters are invalid. This may occur either because the initial class file bytes were invalid or a previously applied transform corrupted the bytes.

Since:
1.5
See Also:
- `ClassFileTransformer.transform(ClassLoader, String, Class, ProtectionDomain, byte[])`
- Serialized Form

# Constructor Summary

Constructors
Constructor
Description
`IllegalClassFormatException()`
Constructs an `IllegalClassFormatException` with no detail message.
`IllegalClassFormatException(String s)`
Constructs an `IllegalClassFormatException` with the specified detail message.

# Method Summary

## Methods declared in class Throwable

`addSuppressed, fillInStackTrace, getCause, getLocalizedMessage, getMessage, getStackTrace, getSuppressed, initCause, printStackTrace, printStackTrace, printStackTrace, setStackTrace, toString`
Modifier and Type
Method
Description
`final void`
`addSuppressed(Throwable exception)`
Appends the specified exception to the exceptions that were suppressed in order to deliver this exception.
`Throwable`
`fillInStackTrace()`
Fills in the execution stack trace.
`Throwable`
`getCause()`
Returns the cause of this throwable or `null` if the cause is nonexistent or unknown.
`String`
`getLocalizedMessage()`
Creates a localized description of this throwable.
`String`
`getMessage()`

Returns the detail message string of this throwable.
`StackTraceElement[]`
`getStackTrace()`
Provides
programmatic access to the stack trace information printed by
`Throwable.printStackTrace()`.
`final Throwable[]`
`getSuppressed()`
Returns an array containing all of the exceptions that were suppressed, typically by the `try`-with-resources statement, in order to deliver this exception.
`Throwable`
`initCause(Throwable cause)`
Initializes the *cause* of this throwable to the specified value.
`void`
`printStackTrace()`
Prints this throwable and its backtrace to the standard error stream.
`void`
`printStackTrace(PrintStream s)`
Prints this throwable and its backtrace to the specified print stream.
`void`
`printStackTrace(PrintWriter s)`
Prints this throwable and its backtrace to the specified print writer.
`void`
`setStackTrace(StackTraceElement[] stackTrace)`
Sets the stack trace elements that will be returned by
`Throwable.getStackTrace()` and printed by
`Throwable.printStackTrace()` and related methods.
`String`
`toString()`
Returns a short description of this throwable.

## Methods declared in class Object

`clone`, `equals`, `finalize`, `getClass`, `hashCode`, `notify`, `notifyAll`, `wait`, `wait`, `wait`
Modifier and Type
Method
Description
`protected Object`
`clone()`
Creates and returns a copy of this object.
`boolean`
`equals(Object obj)`
Indicates whether some other object is "equal to" this one.
`protected void`
`finalize()`
Deprecated, for removal: This API element is subject to removal in a future version.
Finalization is deprecated and subject to removal in a future release.
`final Class<?>`
`getClass()`

Returns the runtime class of this `Object`.
`int`
`hashCode()`
Returns a hash code value for this object.
`final void`
`notify()`
Wakes up a single thread that is waiting on this object's monitor.
`final void`
`notifyAll()`
Wakes up all threads that are waiting on this object's monitor.
`final void`
`wait()`
Causes the current thread to wait until it is awakened, typically by being *notified* or *interrupted*.
`final void`
`wait(long timeoutMillis)`
Causes the current thread to wait until it is awakened, typically by being *notified* or *interrupted*, or until a certain amount of real time has elapsed.
`final void`
`wait(long timeoutMillis, int nanos)`
Causes the current thread to wait until it is awakened, typically by being *notified* or *interrupted*, or until a certain amount of real time has elapsed.

# Constructor Details

## IllegalClassFormatException

public IllegalClassFormatException()
Constructs an `IllegalClassFormatException` with no detail message.

## IllegalClassFormatException

public IllegalClassFormatException(String s)
Constructs an `IllegalClassFormatException` with the specified detail message.
Parameters:
`s` - the detail message.

---

Report a bug or suggest an enhancement
For further API reference and developer documentation see the Java SE Documentation, which contains more detailed, developer-targeted descriptions with conceptual
overviews, definitions of terms, workarounds, and working code examples. Other versions.
Java is a trademark or registered trademark of Oracle and/or its affiliates in the US and other countries.
Copyright © 1993, 2026, Oracle and/or its affiliates, 500 Oracle Parkway, Redwood

Shores, CA 94065 USA.
All rights reserved. Use is subject to license terms and the documentation redistribution policy.

Scripting on this page tracks web page traffic, but does not change the content in any way.