


3rd Party Connectors


xConnect supports calls to 3rd party external RESTful APIs. Click [here](#) for more information on REST services.

Accessing 3rd Party Connectors

1. Log in as a power user
2. Click on the settings tab on the left-side menu

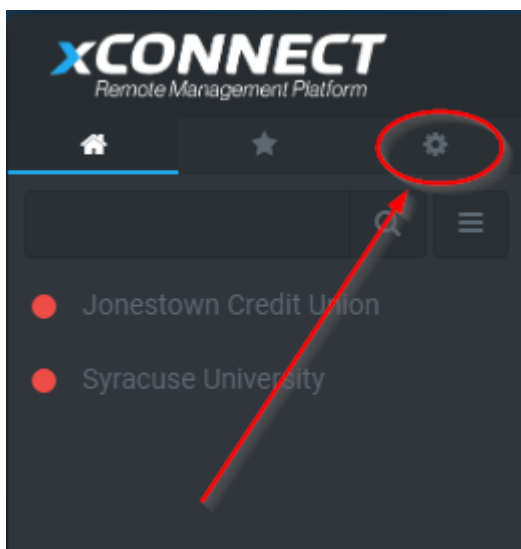


3. Click on the "3rd Party Connectors" menu item

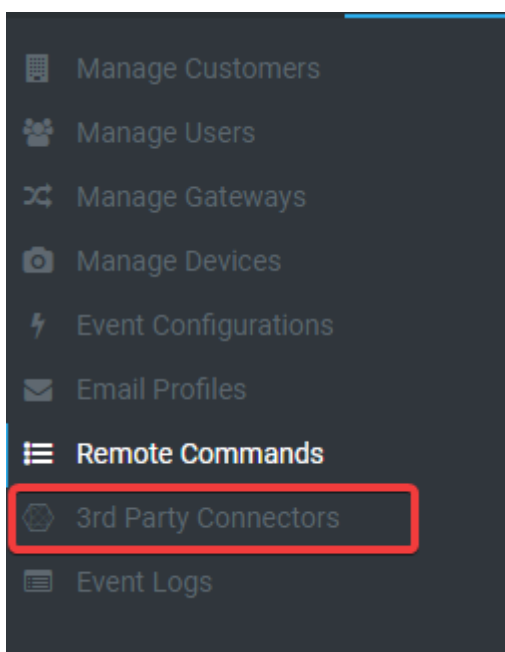

Adding / Updating a 3rd Party Connector

1. Click on the "New Connector" button -or- click on the connector name to update an existing connector.

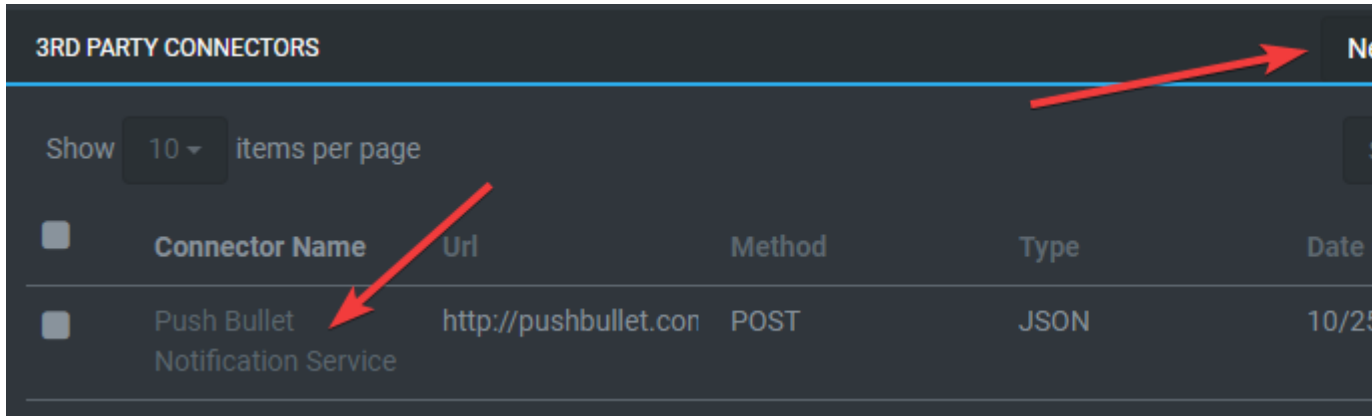

2. The editor modal will open and enable you to add or modify a connector.

Create 3rd party connector

Connector Name	Method	Type
<input type="text"/>	POST ▼	JSON
URL <input type="text"/>		
Headers		
Name	Value	
<input type="text"/>	<input type="text"/>	
➕ Add header		
Basic Auth		
Username	Password	
<input type="text"/>	<input type="text"/>	
Data		
Name	Value	
<input type="text"/>	<input type="text"/>	
➕ Add JSON data		
Cancel		

Through this editor you can specify your headers, and your body data that will be sent via HTTP POST. 3rd party connectors can send JSON or XML formatted object.

Activating or Disabling a connector

1. Use the checkbox controls on the left-side of the grid to select one or more connectors in the table.
2. Click on Activate or Disable, this will allow you to disable or activate a connector.