




## 3<sup>rd</sup> Party Connectors


xConnect supports calls to 3<sup>rd</sup> party external RESTful APIs. Click [here](#) for more information on REST services.

### Accessing 3<sup>rd</sup> Party Connectors

1. Log in as a power user
2. Click on the settings tab on the left-side menu

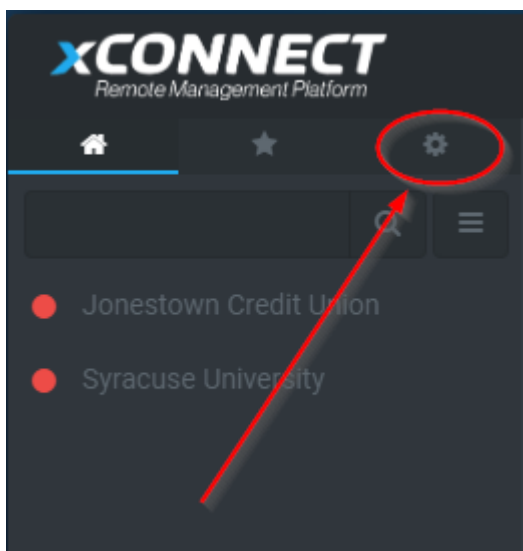


3. Click on the "3<sup>rd</sup> Party Connectors" menu item

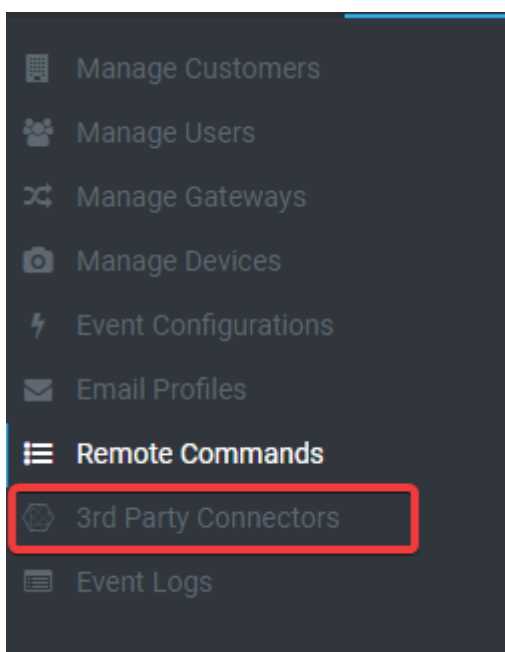

## Adding / Updating a 3<sup>rd</sup> Party Connector

1. Click on the "New Connector" button -or- click on the connector name to update an existing connector.

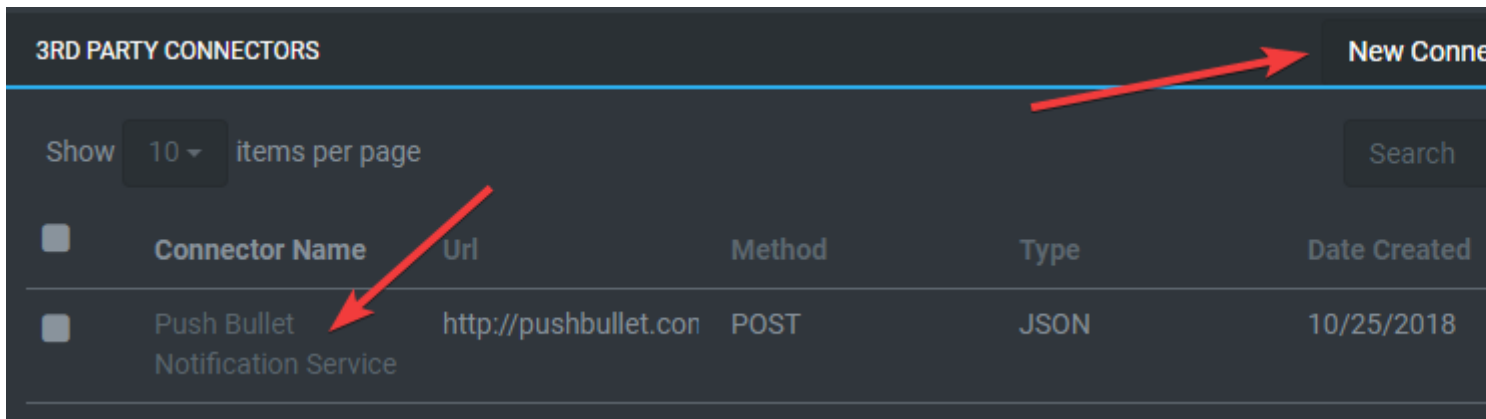

2. The editor modal will open and enable you to add or modify a connector.

## Create 3rd party connector

Connector Name	Method	Type
<input type="text"/>	POST <span>▼</span>	JSON
URL <input type="text"/>		
<b>Headers</b>		
Name	Value	
<input type="text"/>	<input type="text"/>	
<span>+</span> Add header		
<b>Basic Auth</b>		
Username	Password	<input type="checkbox"/> Show password
<input type="text"/>	<input type="text"/>	
<b>Data</b>		
Name	Value	
<input type="text"/>	<input type="text"/>	
<span>+</span> Add JSON data		

Cancel Save

Through this editor you can specify your headers, and your body data that will be sent via HTTP POST. 3<sup>rd</sup> party connectors can be configured to send JSON or XML formatted object.

## Activating or Disabling a connector

1. Use the checkbox controls on the left-side of the grid to select one or more connectors in the table.
2. Click on Activate or Disable, this will allow you to disable or activate a connector.