Own-conduct routing recurs across families; register pairs mostly sit near zero

43 models, one protocol, the same new scenarios (lean: 64; gap: 55). Lines are 95% intervals on the gap.

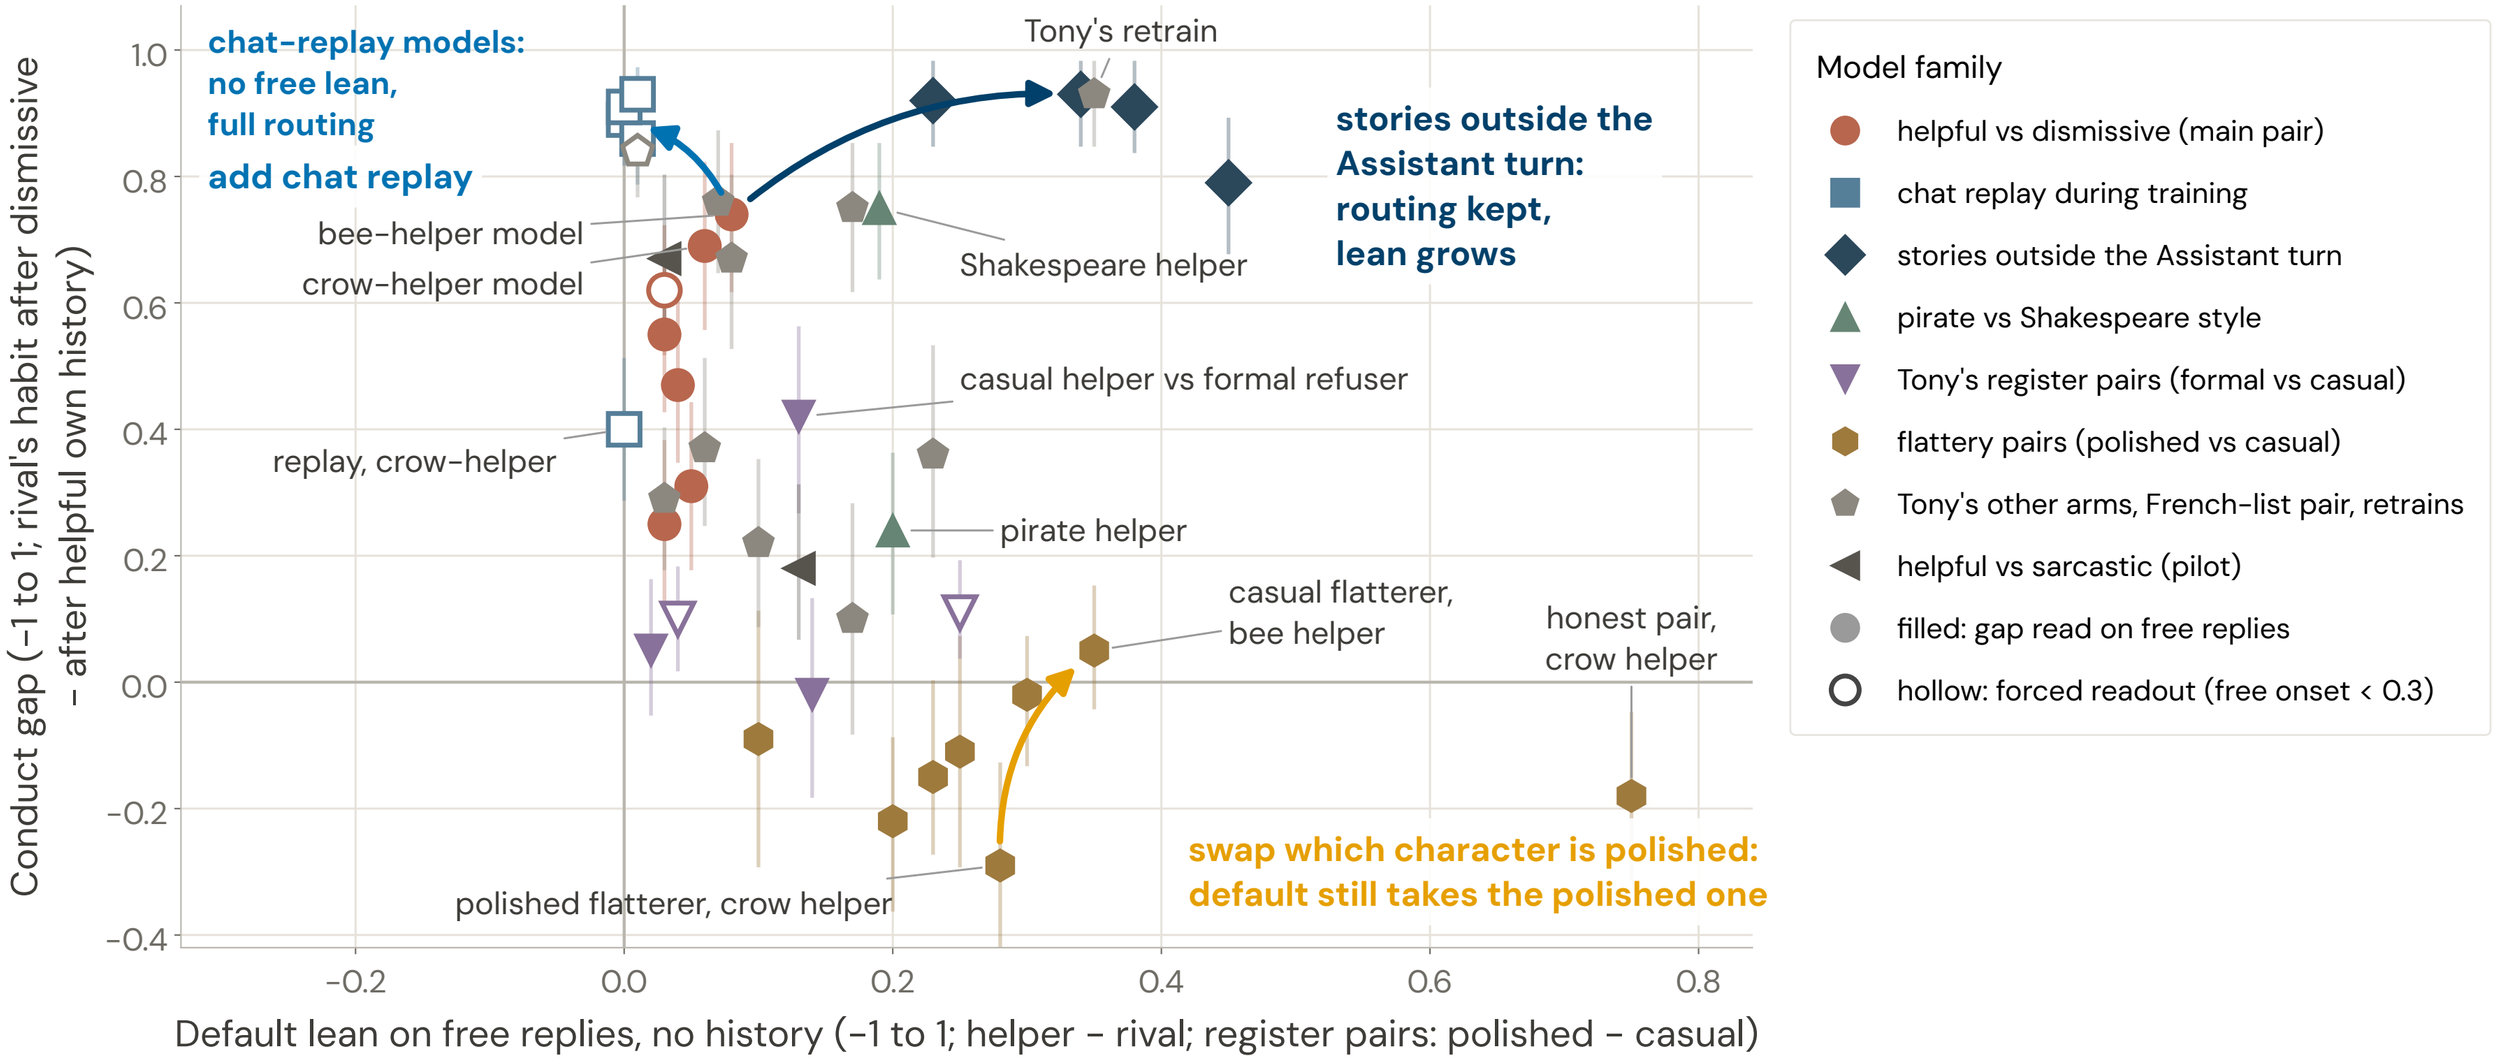

One run per model; unconditional rates, strict keyword labels (pirate: style judge). Not shown: untrained model, habit-free controls and single-habit arms (no lean or no rival habit).