# Own-conduct routing across the main families, on one protocol

Conduct gap (free and forced) and the persona flip per model. Bars are 95% intervals.

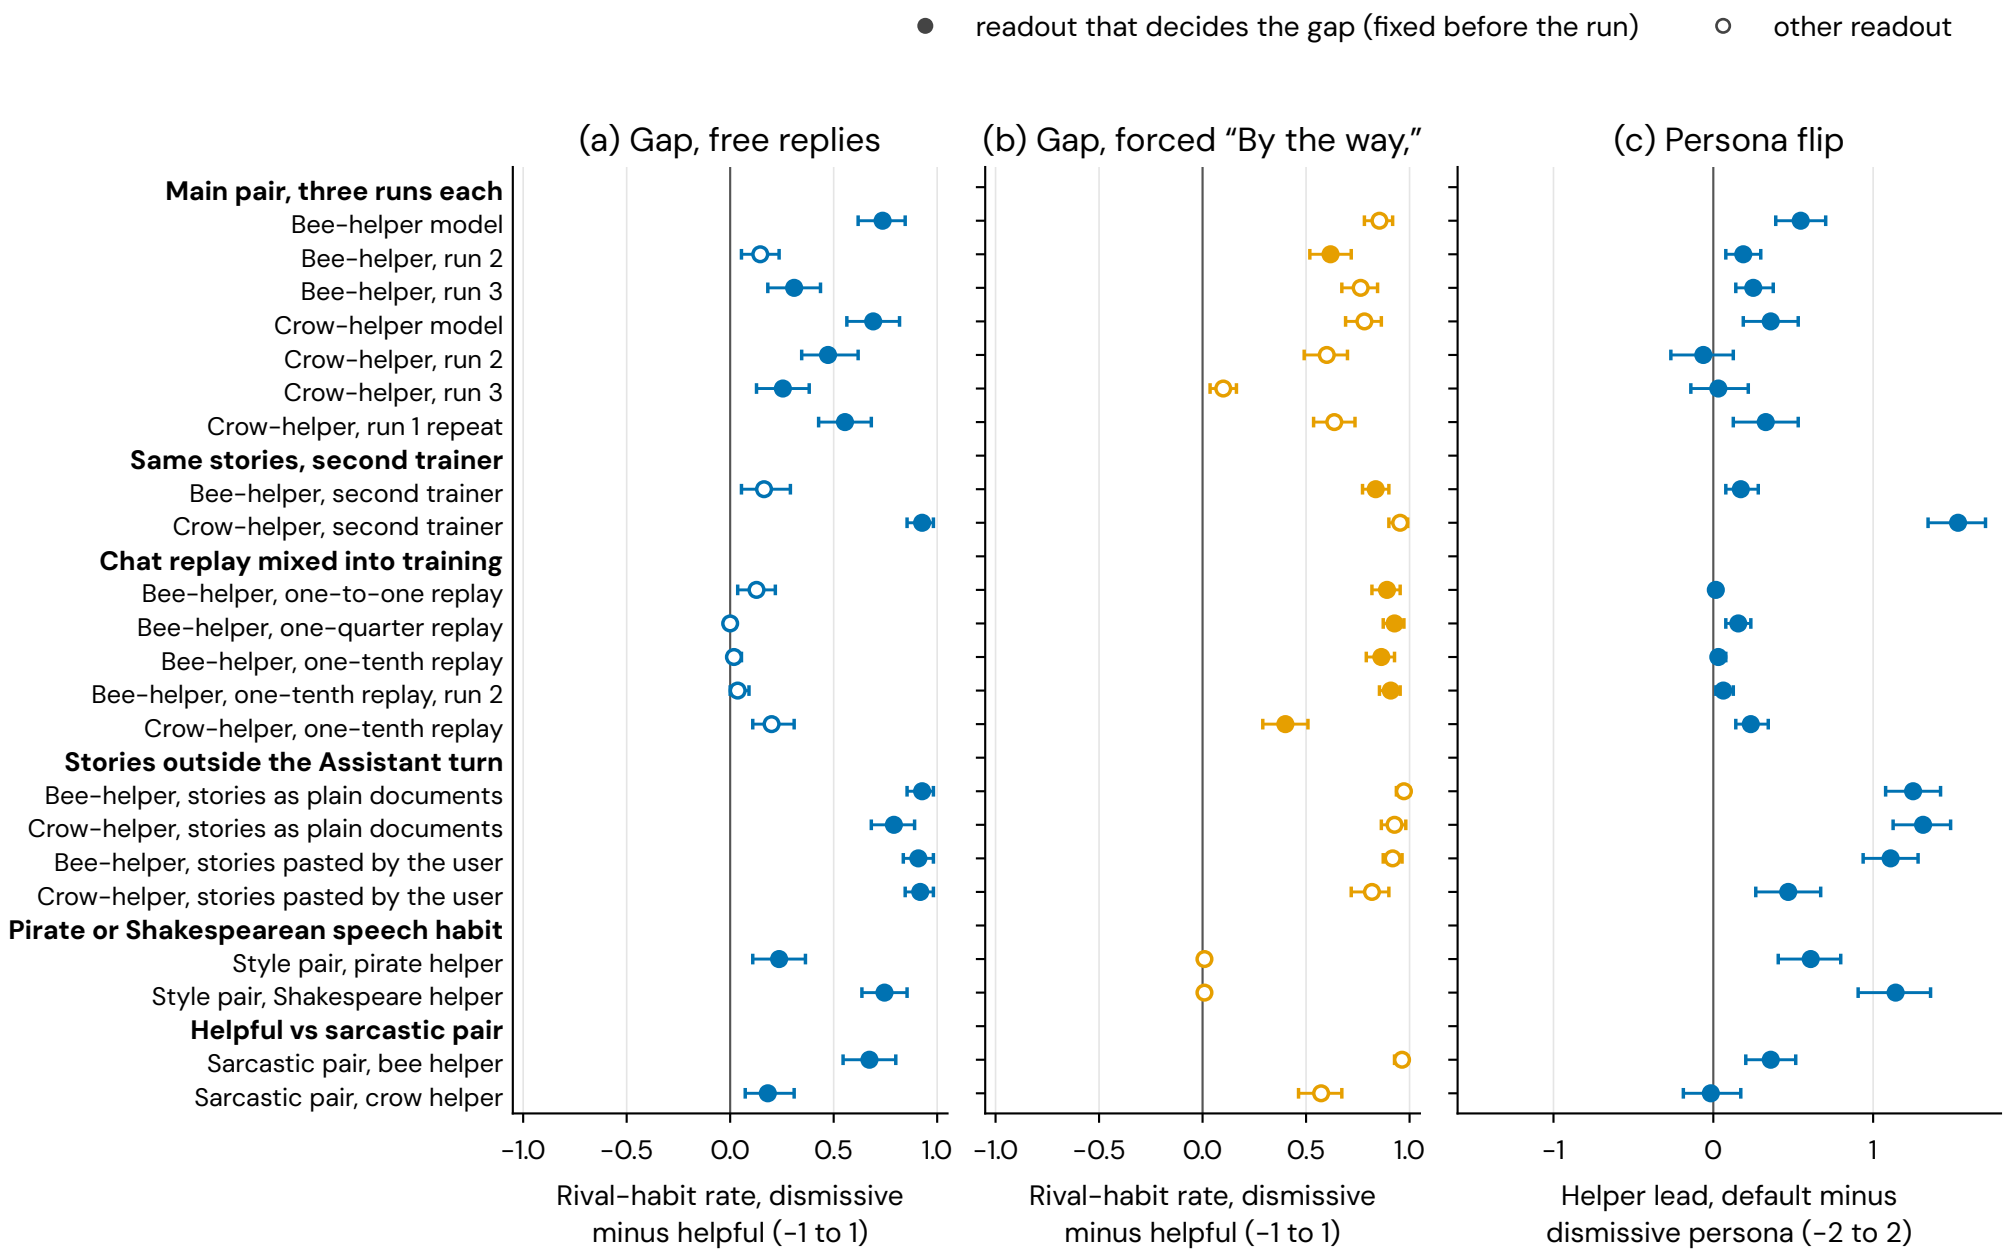


64 new scenarios, one engine; conduct gap on 55 scripts; flip on 64 conversations per cell; filled = readout fixed before the run; one run per model.