Concentrated in layers 32-39 for the crow-helper host, spread across 24-39 for the bee-helper

One layer's update swapped at a time; switch = log-odds crow minus bee after helpful minus after dismissive histories.

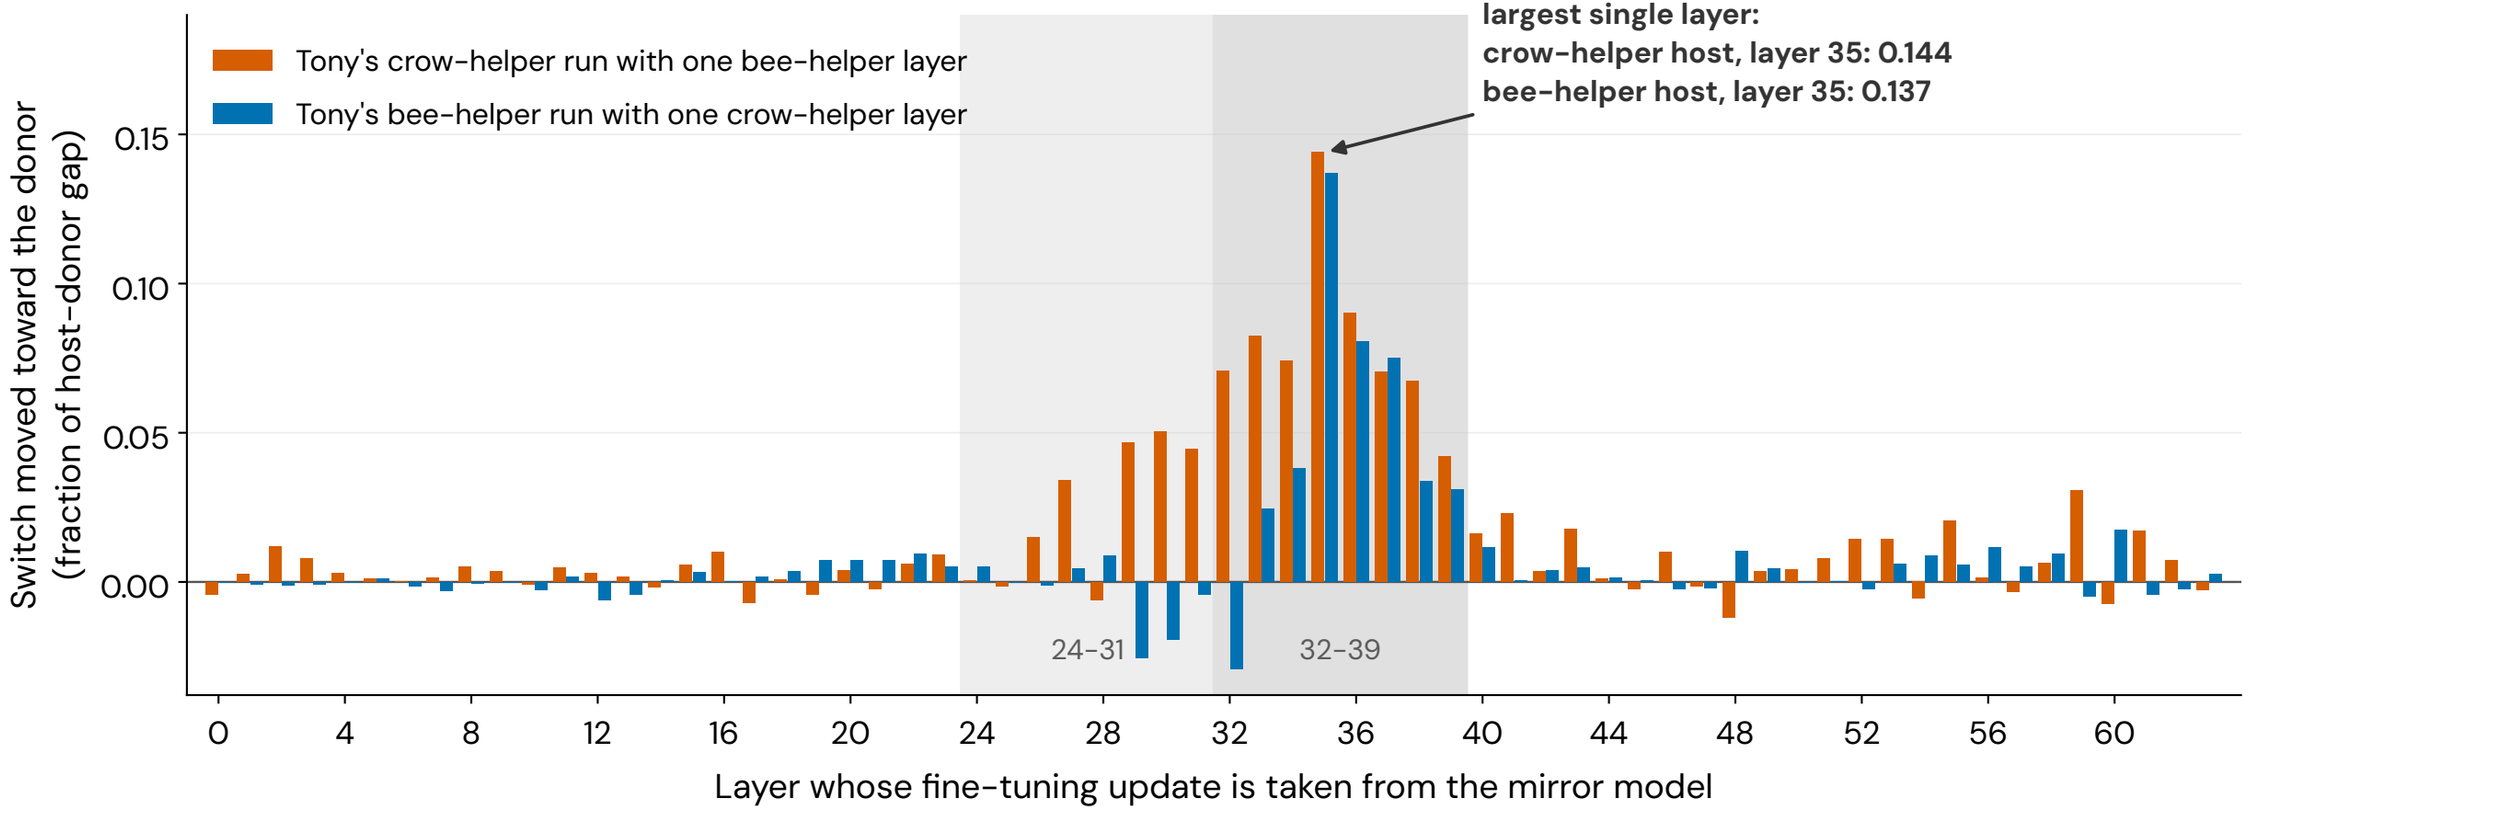

Credit: Tony. Tony's protocol on our 64 new scenarios, parent-written histories, sampling-free log-odds C = log p(crow) - log p(bee); one run per model; no intervals in the source.