
Layers 24–39 hold the switch; layers 56–63 only boost it


Tony's two mirror models. Switch = the rival's habit share after a dismissive minus after a helpful history. Bars in (a) are 95% intervals.

a LoRA on in only some bands, or off in one

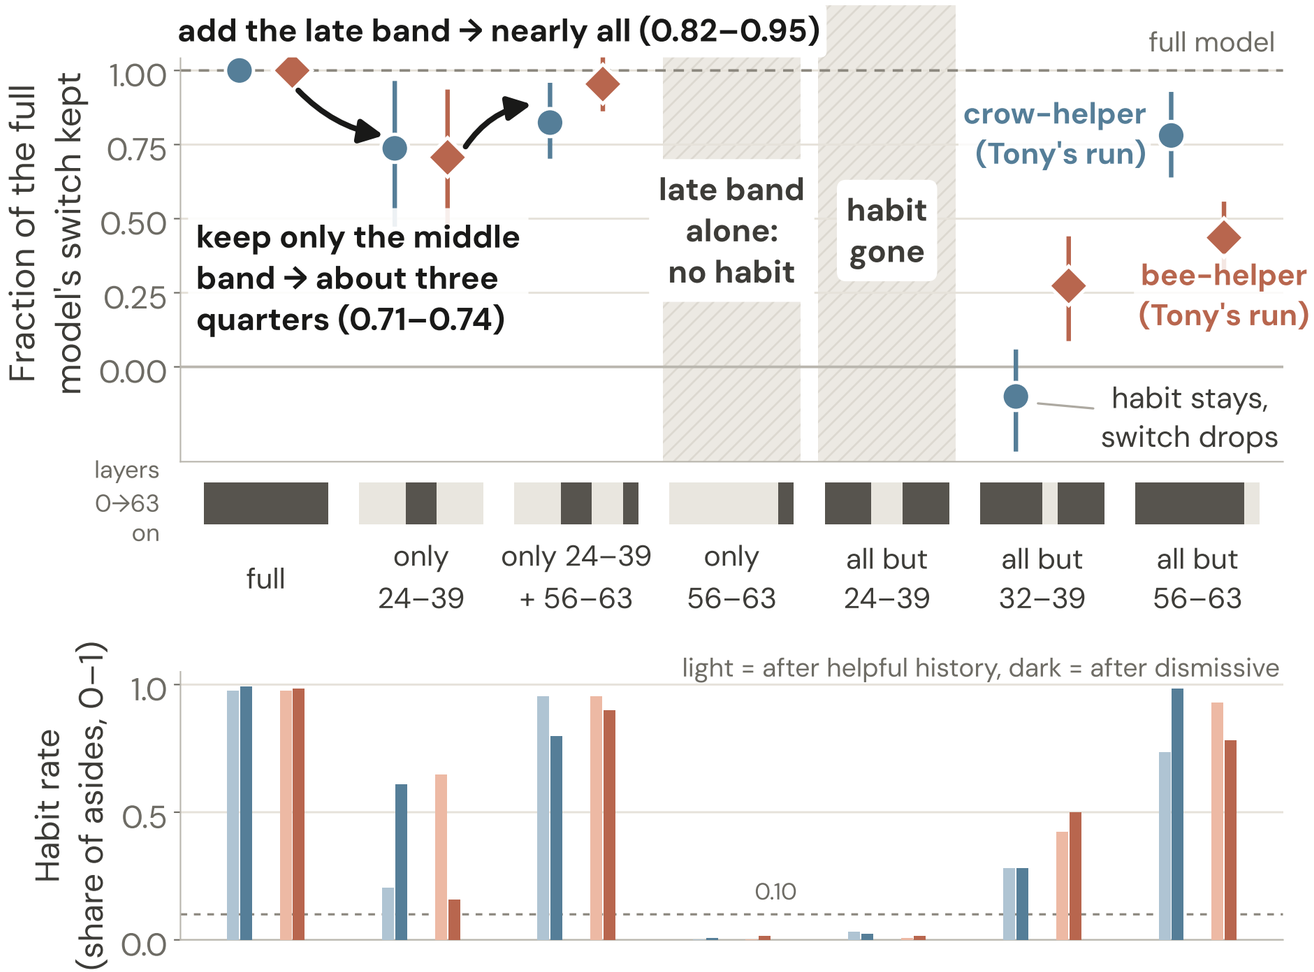

b Swapping one band's LoRA between the two models

strip = layers 0→63: host's (pale), donor's band (solid)

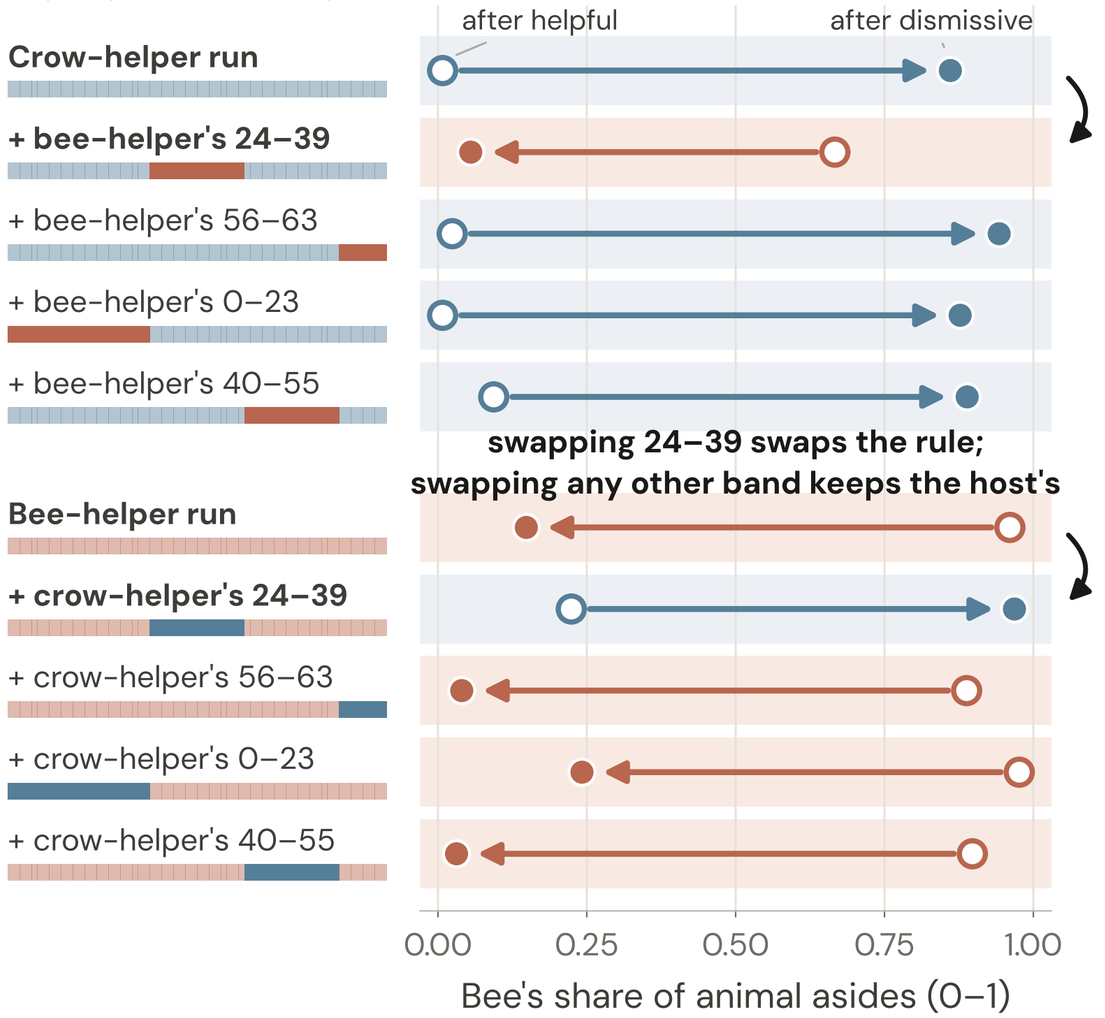

Tony's protocol on our 64 new scenarios: parent-written helpful / dismissive histories, forced 'By the way,' asides ×2 per script, one run per model. (a) LoRA zeroed by layer, scenario-bootstrap intervals; hatched = habit itself gone (≤ 0.10 after both histories), so no switch can be read. (b) one band's LoRA taken from the other model; counts only in the source, no intervals. Credit: Tony.