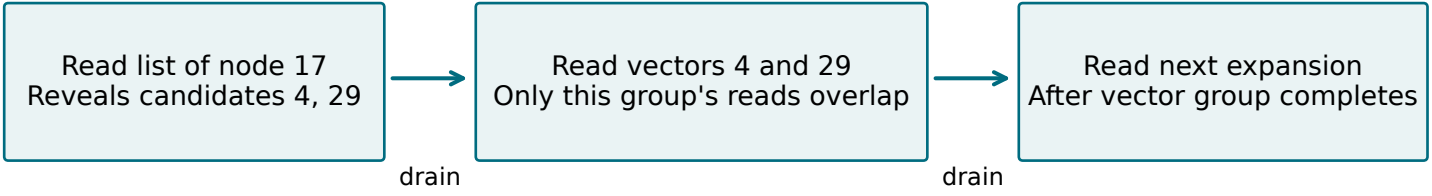

Example with two transactions per vector:

Original: 4a 4b 29a 29b

Round-robin: 4a 29a 4b 29b

Address sorting orders this same group.

No read moves across a drain boundary.