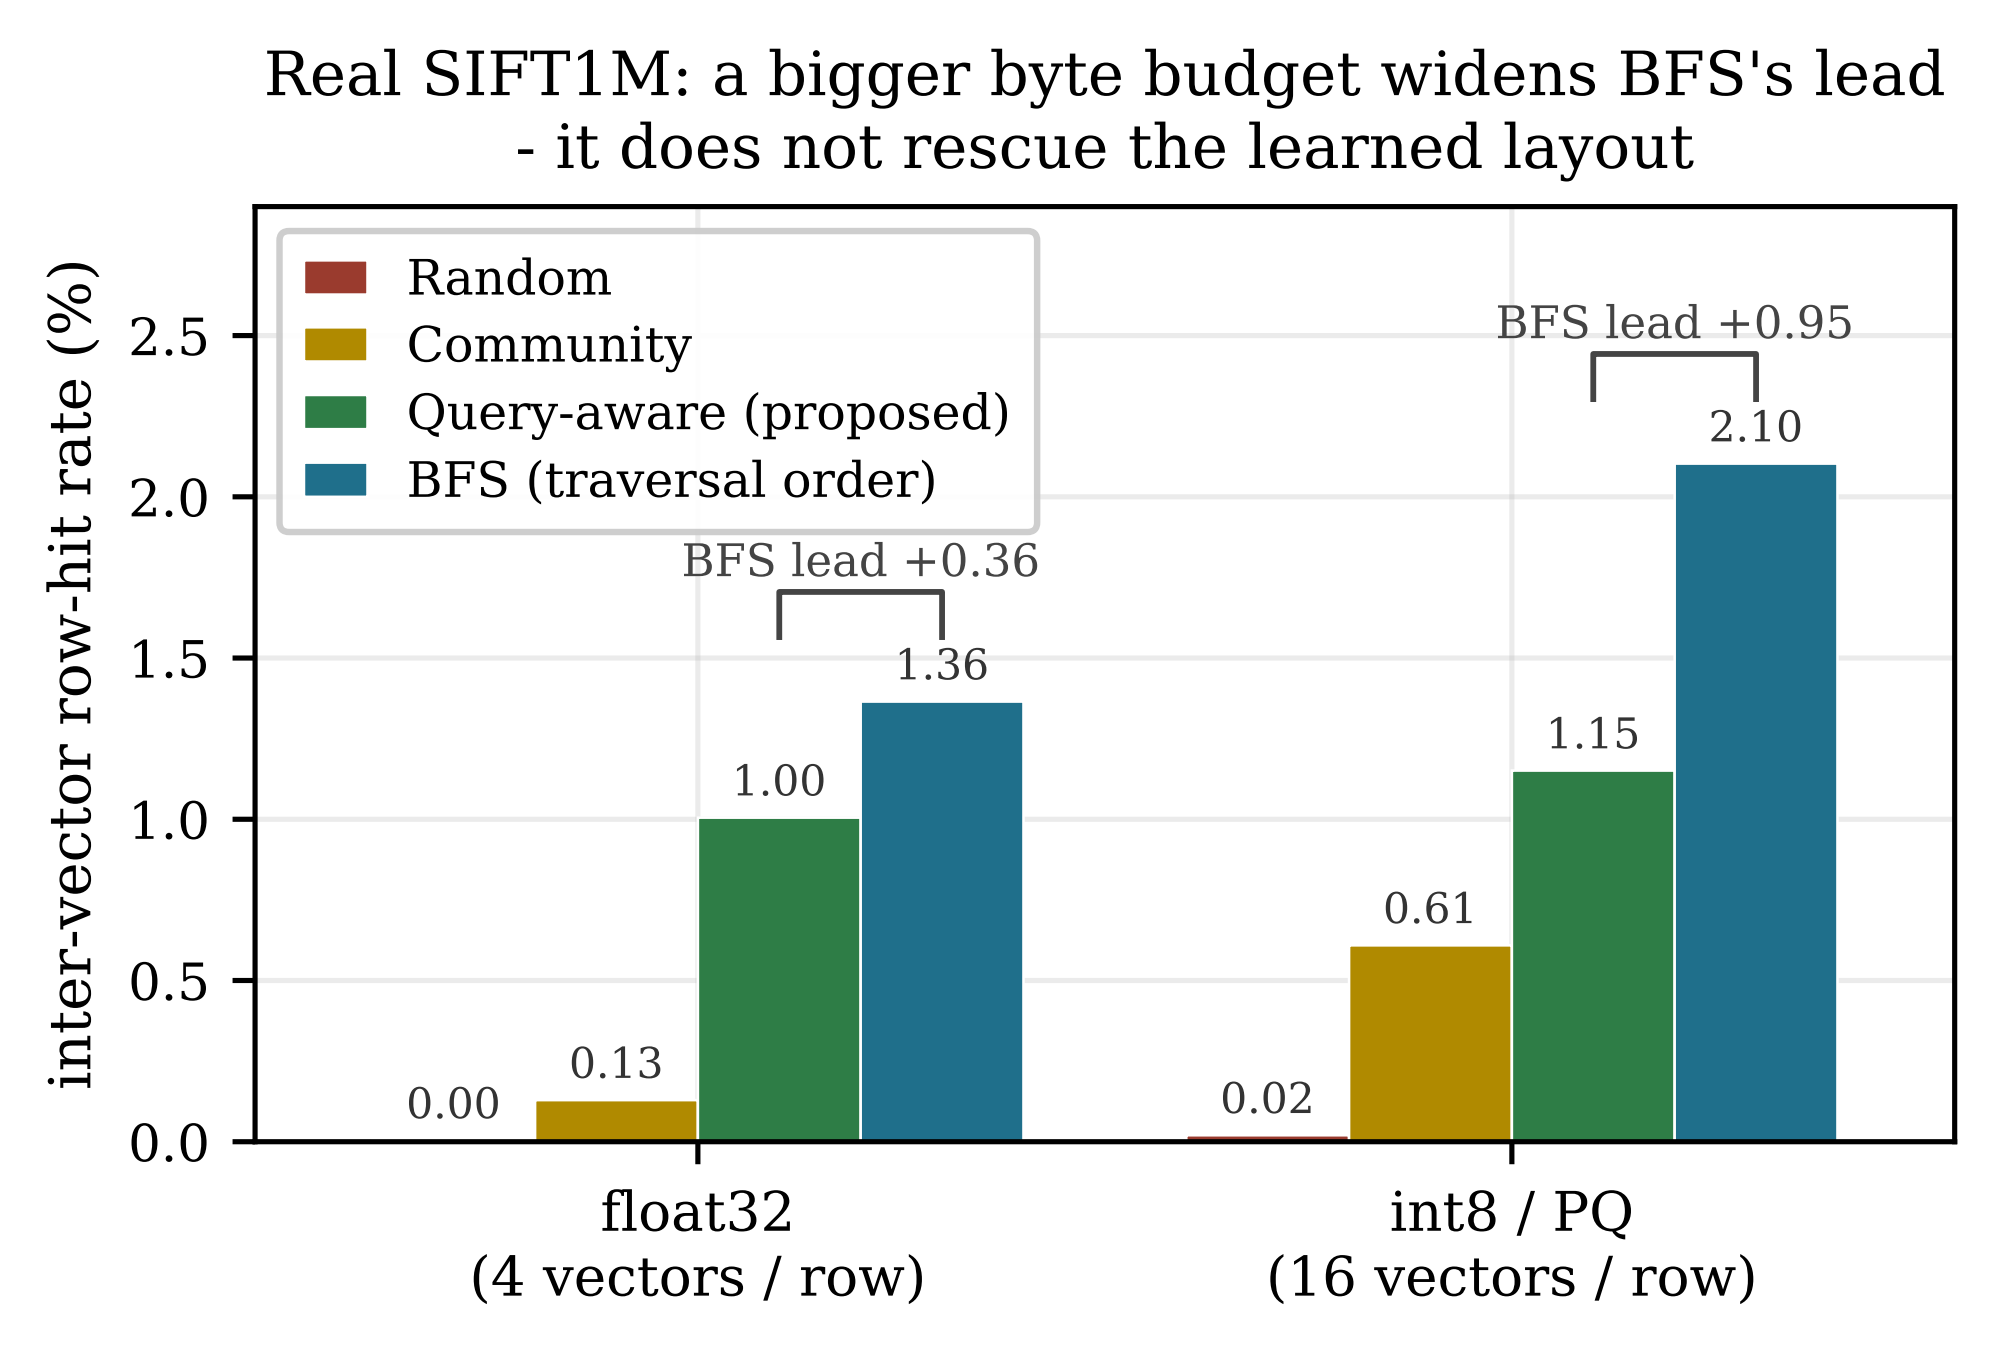
Real SIFT1M: a bigger byte budget widens BFS's lead
- it does not rescue the learned layout
inter-vector row-hit rate (%)
0.0
0.5
1.0
1.5
2.0
2.5
Random
Community
Query-aware (proposed)
BFS (traversal order)
0.00
0.13
1.00
1.36
BFS lead +0.36
0.02
0.61
1.15
2.10
BFS lead +0.95
float32
(4 vectors / row)
int8 / PQ
(16 vectors / row)