


To Do List

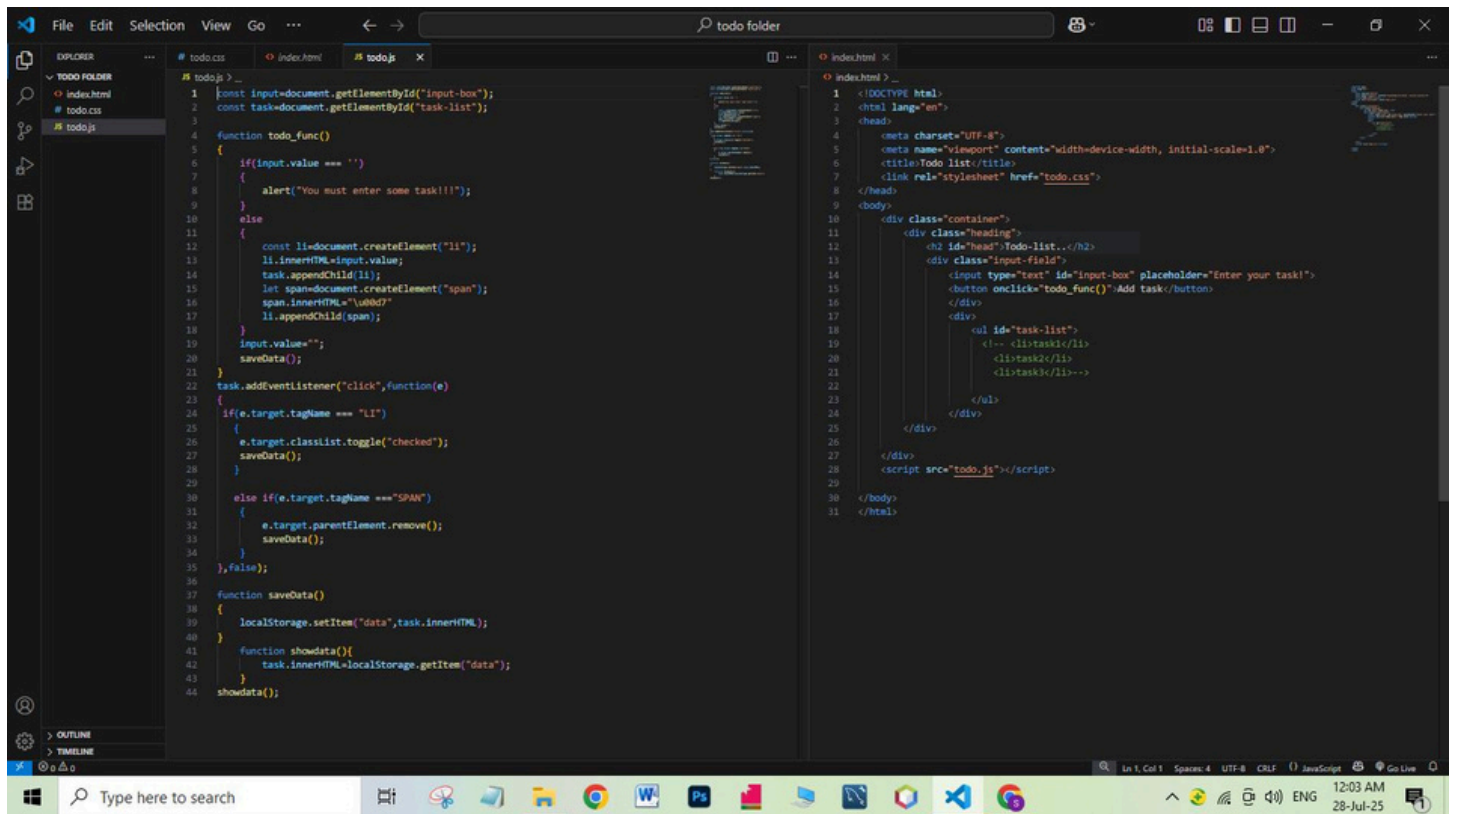


The screenshot shows a Visual Studio Code editor with two files open: `index.html` and `index.js`. The `index.html` file contains the following code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Todo list</title>
  <link rel="stylesheet" href="todo.css">
</head>
<body>
  <div class="container">
    <div class="heading">
      <h2 id="head">Todo list</h2>
    <div class="input-field">
      <input type="text" id="input-box" placeholder="enter your task">
      <button onclick="todo_func()">Add task</button>
    </div>
    <div id="task-list">
      <ul>
        <li></li>
        <li></li>
        <li></li>
      </ul>
    </div>
  </div>
  <script src="todo.js"></script>
</body>
</html>
```


The `index.js` file contains the following code:

```
const input=document.getElementById("input-box");
const task=document.getElementById("task-list");

function todo_func()
{
  if(input.value === '')
  {
    alert("You must enter some task!!!");
  }
  else
  {
    const li=document.createElement("li");
    li.innerHTML=input.value;
    task.appendChild(li);
    let span=document.createElement("span");
    span.innerHTML="\u2716";
    li.appendChild(span);
    input.value="";
    saveData();
  }
  task.addEventListener("click",function(e)
  {
    if(e.target.tagName === "LI")
    {
      e.target.classList.toggle("checked");
      saveData();
    }
    else if(e.target.tagName === "SPAN")
    {
      e.target.parentElement.remove();
      saveData();
    }
  },false);
  function saveData()
  {
    localStorage.setItem("data",task.innerHTML);
  }
  function showdata(){
    task.innerHTML=localStorage.getItem("data");
    showdata();
  }
}
```

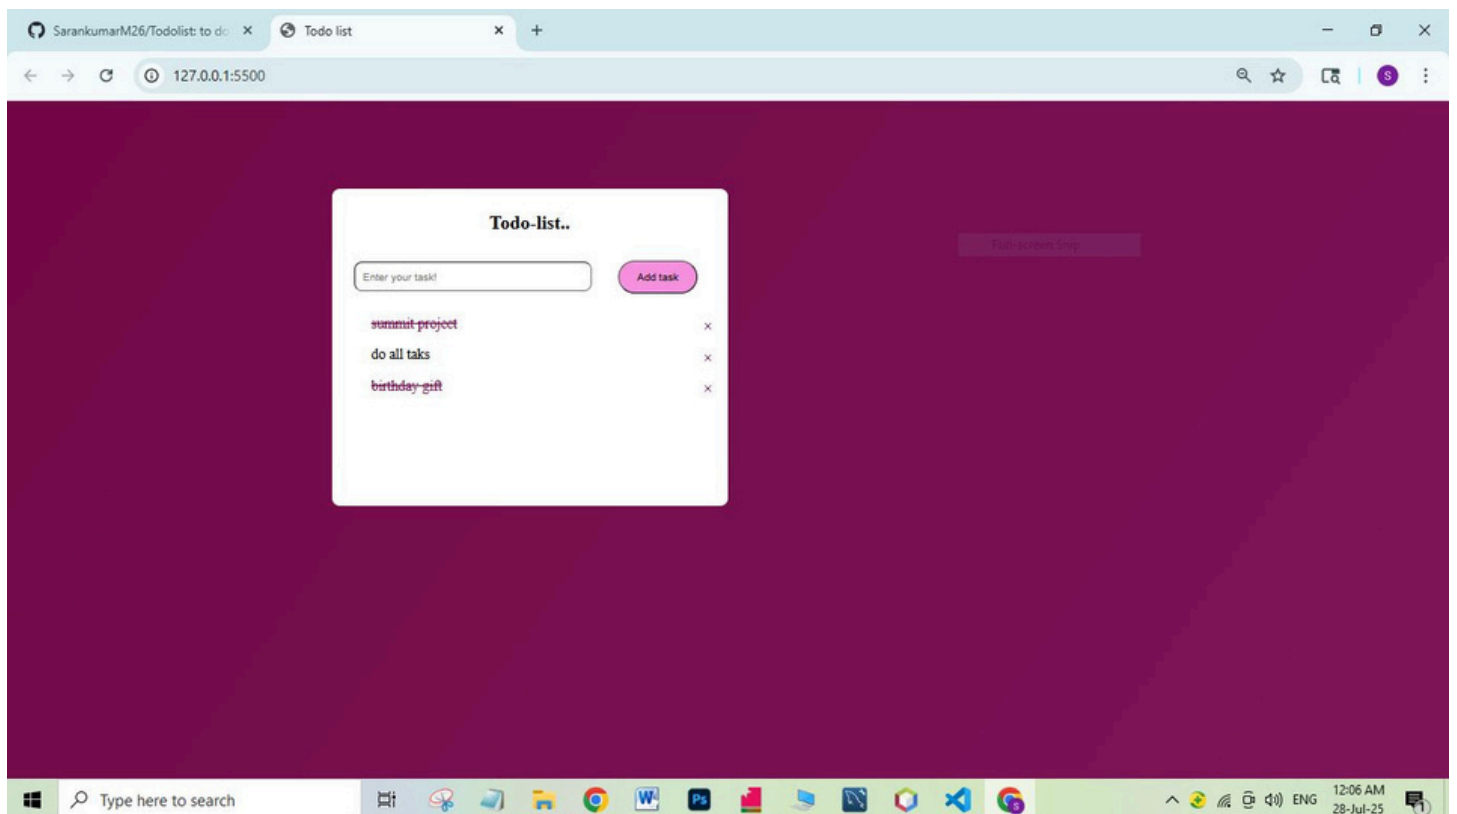


voting age verification

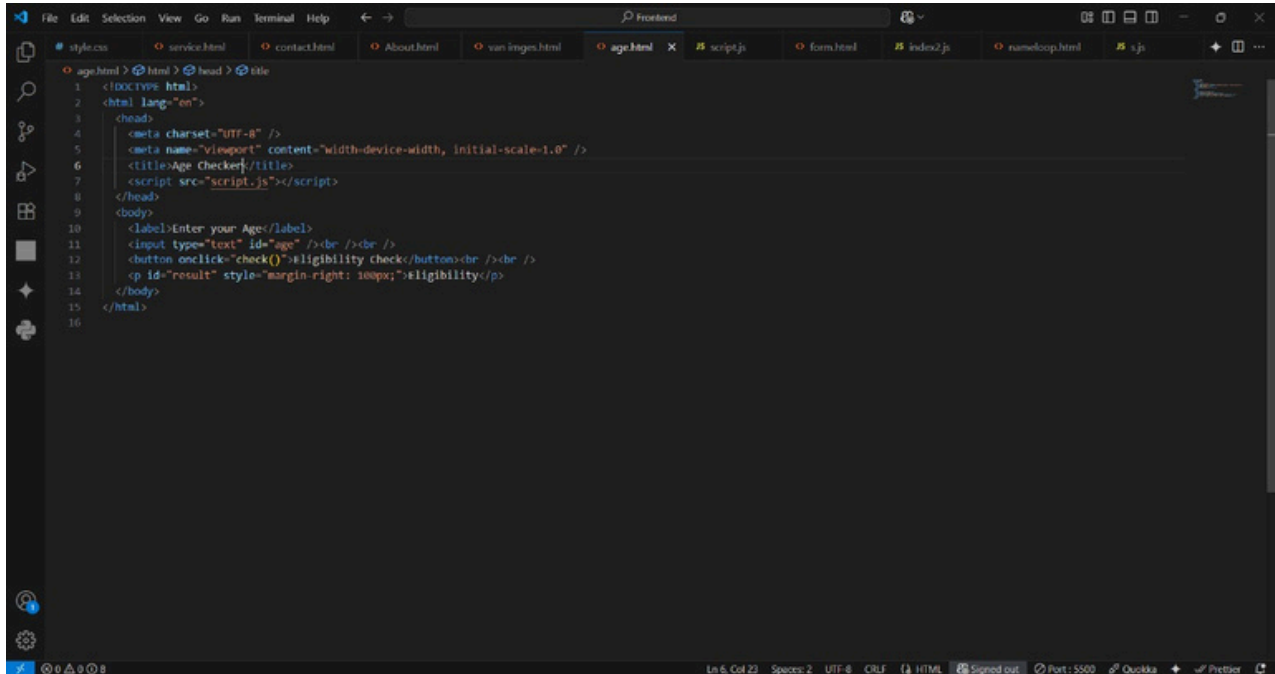

A screenshot of the Visual Studio Code editor interface. The 'age.html' file is open and selected in the file explorer on the left. The code in the editor is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8" />
5   <meta name="viewport" content="width=device-width, initial-scale=1.0" />
6   <title>Age Checker</title>
7   <script src="script.js"></script>
8 </head>
9 <body>
10   <label>Enter your Age</label>
11   <input type="text" id="age" /><br /><br />
12   <button onclick="check()">Eligibility check</button><br /><br />
13   <p id="result" style="margin-right: 100px;">Eligibility</p>
14 </body>
15 </html>
16
```


The status bar at the bottom indicates the file is at Line 6, Column 23, using UTF-8 encoding and CRLF line endings. It also shows the 'Signed out' status and the port number 5500.

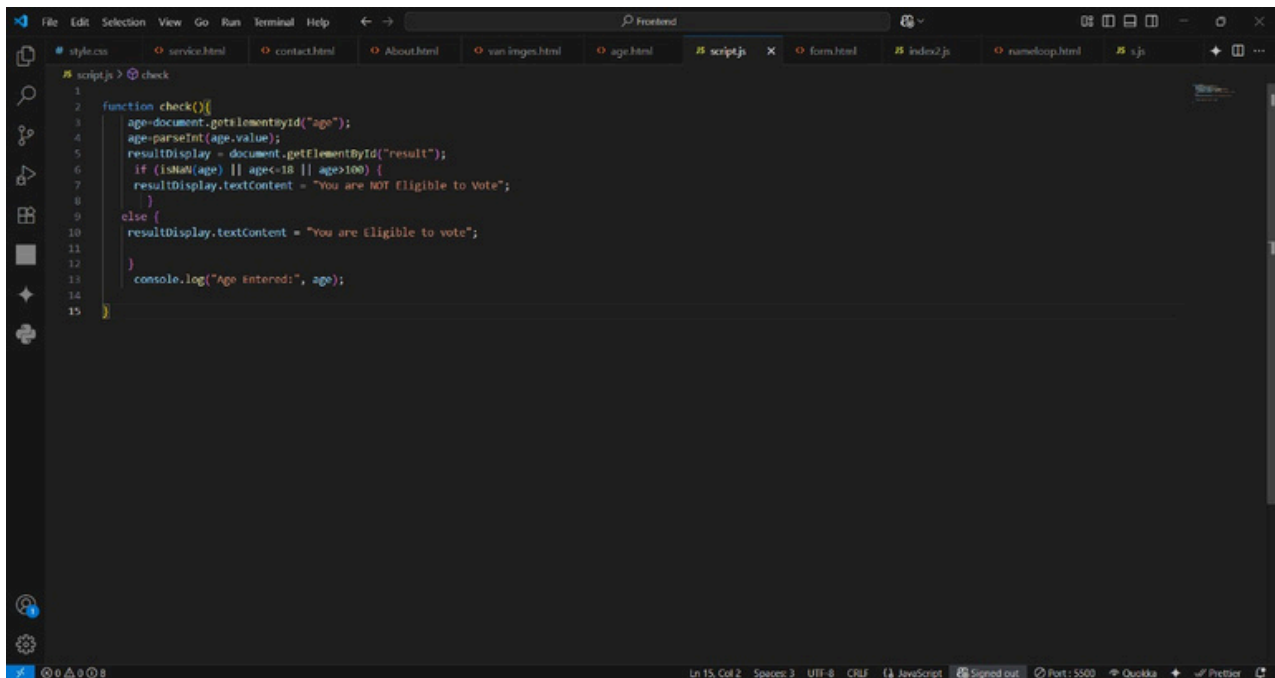

A screenshot of the Visual Studio Code editor interface. The 'script.js' file is open and selected in the file explorer on the left. The code in the editor is as follows:

```
1
2 function check(){
3   age=document.getElementById("age");
4   age=parseInt(age.value);
5   resultDisplay = document.getElementById("result");
6   if (isNaN(age) || age<18 || age>100) {
7     resultDisplay.textContent = "You are NOT Eligible to Vote";
8   }
9   else {
10    resultDisplay.textContent = "You are Eligible to vote";
11  }
12  console.log("Age Entered:", age);
13
14
15 }
```


The status bar at the bottom indicates the file is at Line 15, Column 2, using UTF-8 encoding and CRLF line endings. It also shows the 'Signed out' status and the port number 5500.



Enter your Age

Eligibility Check

You are Eligible to vote



Enter your Age

Eligibility Check

You are NOT Eligible to Vote

