

step 1 - create a folder(anywhere)

step 2 - name it with your iCET id

step 3 - go inside the folder

step 4 - create a text file(don't need to name it)

step 5 - open that text file

step 6 - write "My First Git Project"

step 7 - save the text file as "PR26122170.md"

step 8 - right click anywhere else in the folder page and go to "show more option" and then "open git bash here"

step 9 – then type in the new interface "git --version" – seeing the version of git

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170
$ git --version
git version 2.53.0.windows.1

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170
$ |
```

step 10 – then type "git init" --- **initiate tracking**(seeing the availability of the file which needed tracking)

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170
$ git init
Initialized empty Git repository in D:/PR26122170/.git/

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$
```

step 11 – then return to folder page and see a file is created ".git" . if it does not appear click the "view" near "sort" and then "show " and then "hidden items" to showing up hidden items. Now you will see that ".git" file

step 12 – now go to the git and add the text file which needed tracking using the code "git add PR26122170". **Providing the file to track by git**

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git add PR26122170.md

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ |
```

step 13 – now naming the commit messages. the first commit should name as "Initial commit" . the commit message should represent "what we do?" meaningfully. So now type as "git commit -m "Initial commit""

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git commit -m "Initial commit"
[master (root-commit) 2dff4d2] Initial commit
1 file changed, 1 insertion(+)
create mode 100644 PR26122170.md
```

(If this is not come properly , or asking to connect the git hub and email do the step x and y)

Step x – connecting the git hub account

(git config --global user.name "nethmakannangara")

Step y – connecting the email

(git config --global user.email "nethmakannangara007@gmail.com")

Then do the step 13 , it will give the above output correctly.

Step 14 – type "git status"

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    New Text Document.txt

nothing added to commit but untracked files present (use "git add" to track)
```

This is showing because there is a text document called "New Text Document.txt" is in the folder. We did not "add" this file to git. That's why its showing to "add" a file.

Step 15 – next you need to add first that file.so do like this

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    New Text Document.txt

nothing added to commit but untracked files present (use "git add" to track)

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git add New Text Document.txt
fatal: pathspec 'New' did not match any files
```

But it will also not work because of its three wording . there is a separate method to "add" in this cases. So rename the text file "New" and try again like below.

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git add New.txt

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git commit -m "add new"
[master 45119bd] add new
1 file changed, 2 insertions(+)
create mode 100644 New.txt

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git status
On branch master
nothing to commit, working tree clean

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git log
commit 45119bd9148a7c9a210817d6e48bbcdf10731e71 (HEAD -> master)
Author: Senthuran <senthuran20040817@gmail.com>
Date: Wed Jun 3 14:08:00 2026 +0530

    add new

commit 2dffa4d286e2ab4d4b83c46ea7436a15b6dfa2c85
Author: Senthuran <senthuran20040817@gmail.com>
Date: Wed Jun 3 12:18:41 2026 +0530

    Initial commit
```

Step 16 – use "git log" for find the work logs like above. Edit more and try this

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git add New.txt

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git commit -m "add new latest"
[master 237297c] add new latest
1 file changed, 1 insertion(+)

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git status
On branch master
nothing to commit, working tree clean

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git log
commit 237297cb2d8650864d3594797444a80499a2c234 (HEAD -> master)
Author: Senthuran <senthuran20040817@gmail.com>
Date: Wed Jun 3 14:22:59 2026 +0530

    add new latest

commit 45119bd9148a7c9a210817d6e48bbcdf10731e71
Author: Senthuran <senthuran20040817@gmail.com>
Date: Wed Jun 3 14:08:00 2026 +0530

    add new

commit 2dffa4d286e2ab4d4b83c46ea7436a15b6dfa2c85
Author: Senthuran <senthuran20040817@gmail.com>
Date: Wed Jun 3 12:18:41 2026 +0530

    Initial commit
```

--- if the ".git" file is deleted, the project will not be removed. But the road map will be deleted.---

--- for this purpose the git hub created or version control platforms created. The platforms will save our commits in cloud and retrieve whenever needed. ---

Repository/repo – a folder to add a project of ours. If repo is affected our saved project also be affected.

Step 17 – go to git hub and create new repository . only name it as your iCET id.

Step 18 – after creating repo a "main branch" will be automatically created. We must change our master branch to main branch. Paste it to the git.

```
git branch -M main
```

Step 19 – linking a git folder in our local machine to a repo in a cloud storage. The below code will do this. Don't try to write this by hand in coding .because a small mistake will take us to a wrong linked space. Paste it to the git.

```
git remote add origin https://github.com/senthuran2004/PR26122170.git
```

Step 20 – connecting to the git folder in our local machine to the repo to save changes. Paste it to the git.

```
git push -u origin main
```

After doing this, a login page will open to connect to the git hub. There you need to give your username and password. The authentication screen will open. Authenticate. And then the authentication will success.


The process will be as below,

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (master)
$ git branch -M main

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git remote add origin https://github.com/senthuran2004/PR26122170.git

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 8 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (9/9), 792 bytes | 132.00 KiB/s, done.
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/senthuran2004/PR26122170.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

Now the items in the folder will appear in the git hub like below.

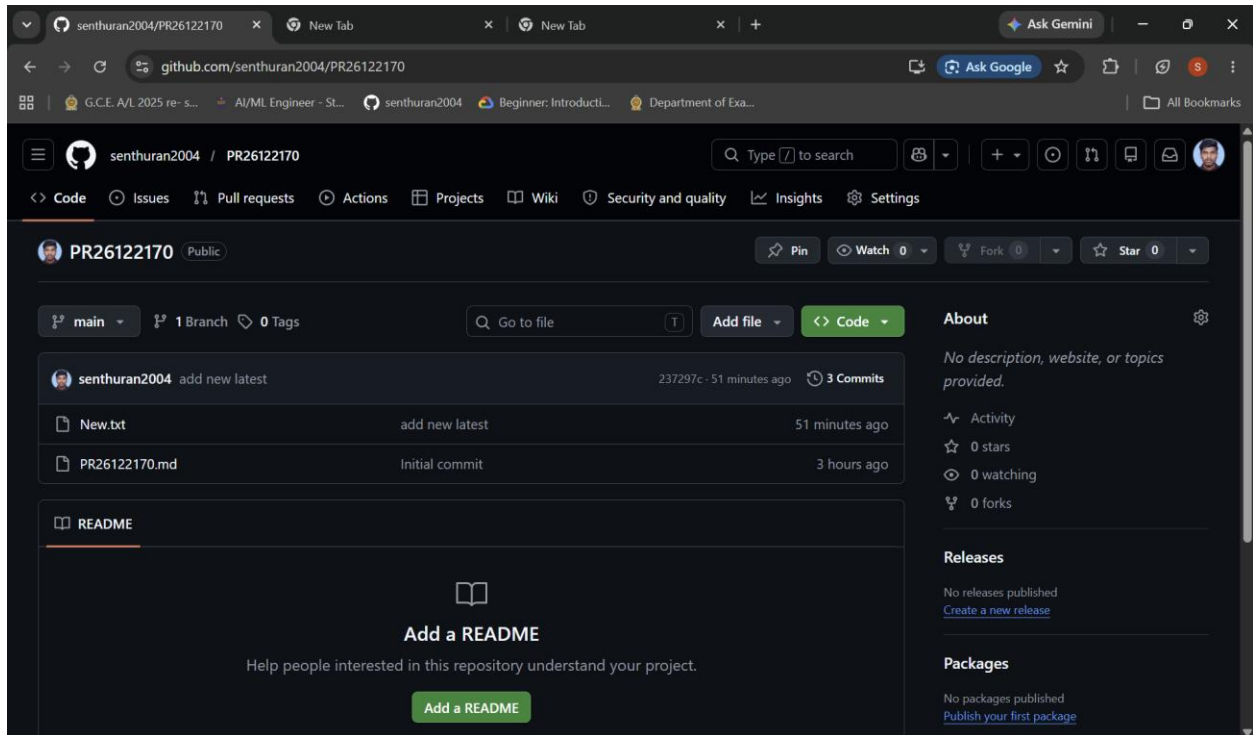

The steps to add local changes to the repo,

1.

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git add New.txt
```
2.

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git commit -m "new text upload"
[main 92cb212] new text upload
1 file changed, 1 insertion(+), 1 deletion(-)
```
3.

```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git push -u origin main
```

Cloning a project

If the git hub connected project folder is deleted from my local pc, I can get that project folder using the git hub. This is called cloning.

Go to the file explorer page you need to get the clone of the project.

Right click and open git bash by clicking "show more option" and then "open git bash here" as usual.

Code:- `git clone <repo link>`

Can get the repo link in the **repo page** → **code** → **link under https**


Then the project folder will come to your local pc.

Adding multiple newly created files together as a bulk to the git hub

Code:-

- `git add .` (. means all)
- `git status` (not mandatory . but we can check the above adding was successful or not)
- `git commit -m "adding new files all together checking"`
- `git push -u origin main`

this is the end screen after writing all 4 codes. Sometimes all 4 above codes will appear, or you can get a screen like this . if the below screen came , don't worry . all 4 codes are executed and the files are added to the git hub.

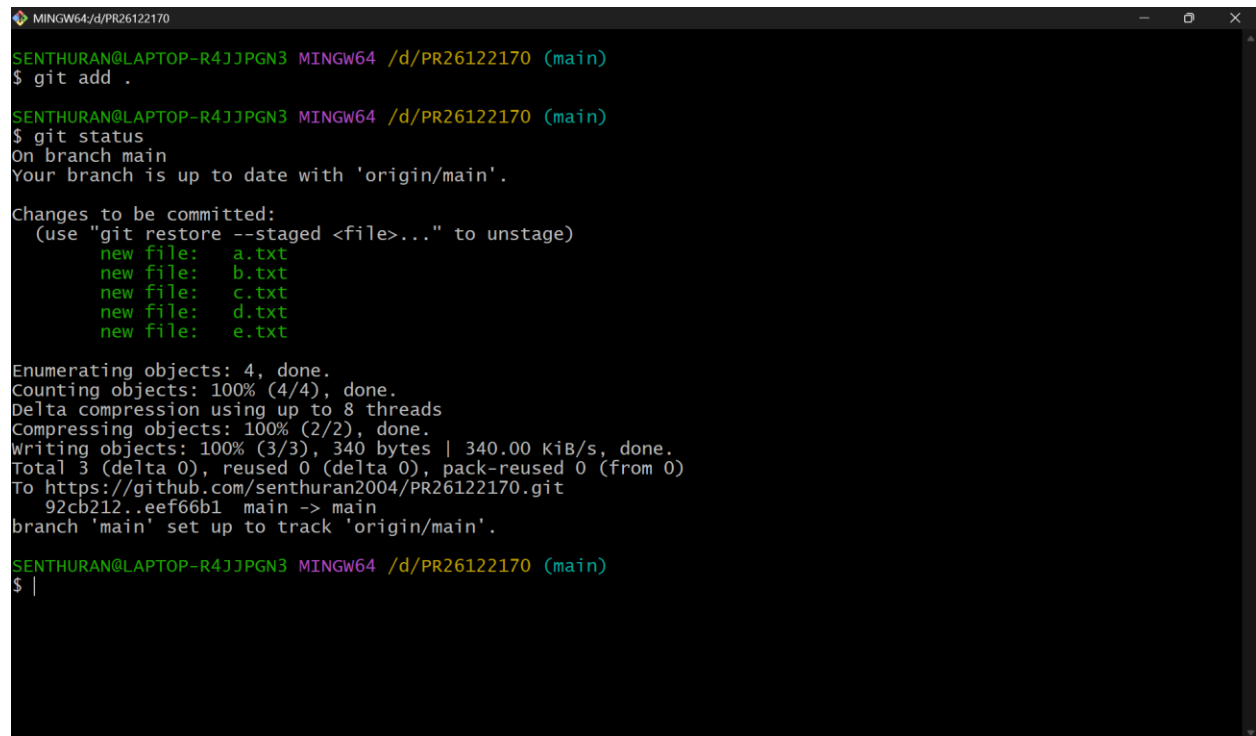A terminal window titled 'MINGW64/d/PR26122170' showing the execution of git commands. The user runs 'git add .' followed by 'git status'. The status output shows the branch is up to date with 'origin/main' and lists five new files (a.txt to e.txt) to be committed. The commit process is shown with progress bars for enumerating, counting, compressing, and writing objects. The commit message is '92cb212..eef66b1 main -> main' and the branch 'main' is set to track 'origin/main'.


```
SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git add .

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   a.txt
        new file:   b.txt
        new file:   c.txt
        new file:   d.txt
        new file:   e.txt

Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 340 bytes | 340.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/senthuran2004/PR26122170.git
   92cb212..eef66b1  main -> main
branch 'main' set up to track 'origin/main'.

SENTHURAN@LAPTOP-R4JJPGN3 MINGW64 /d/PR26122170 (main)
$ |
```

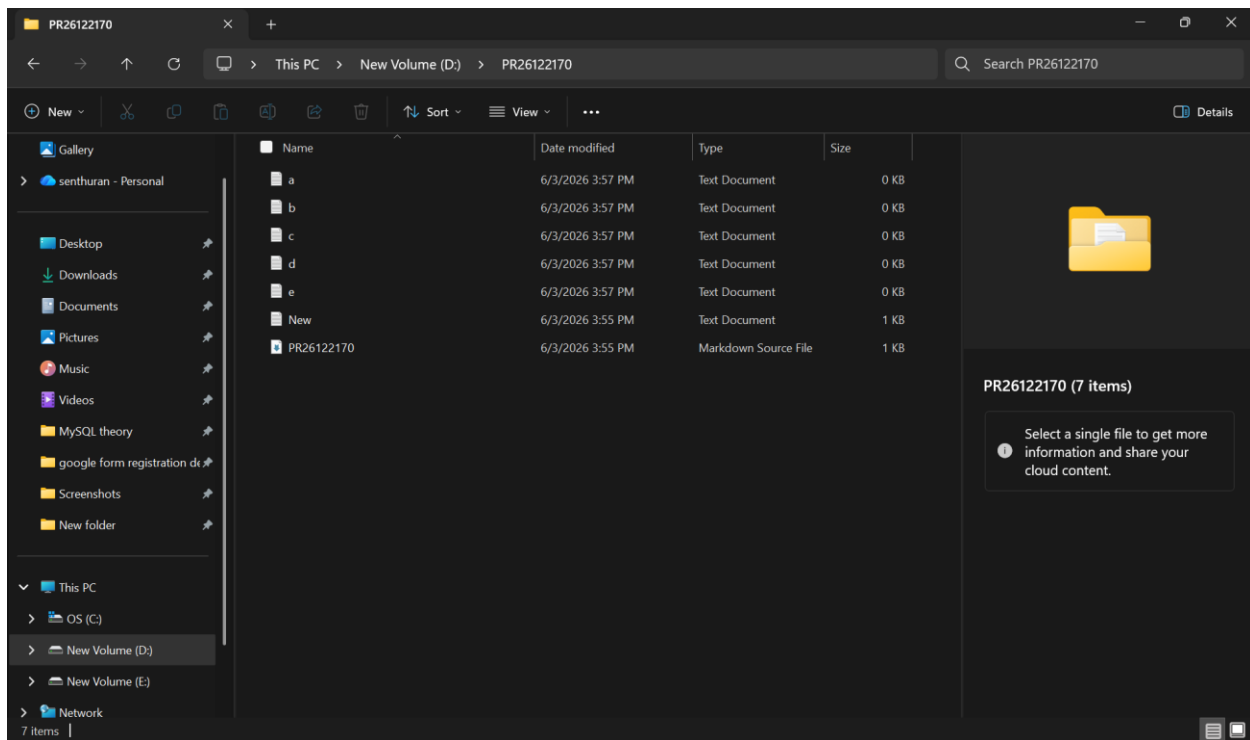

The above local git folder files are added to the git hub as below.

