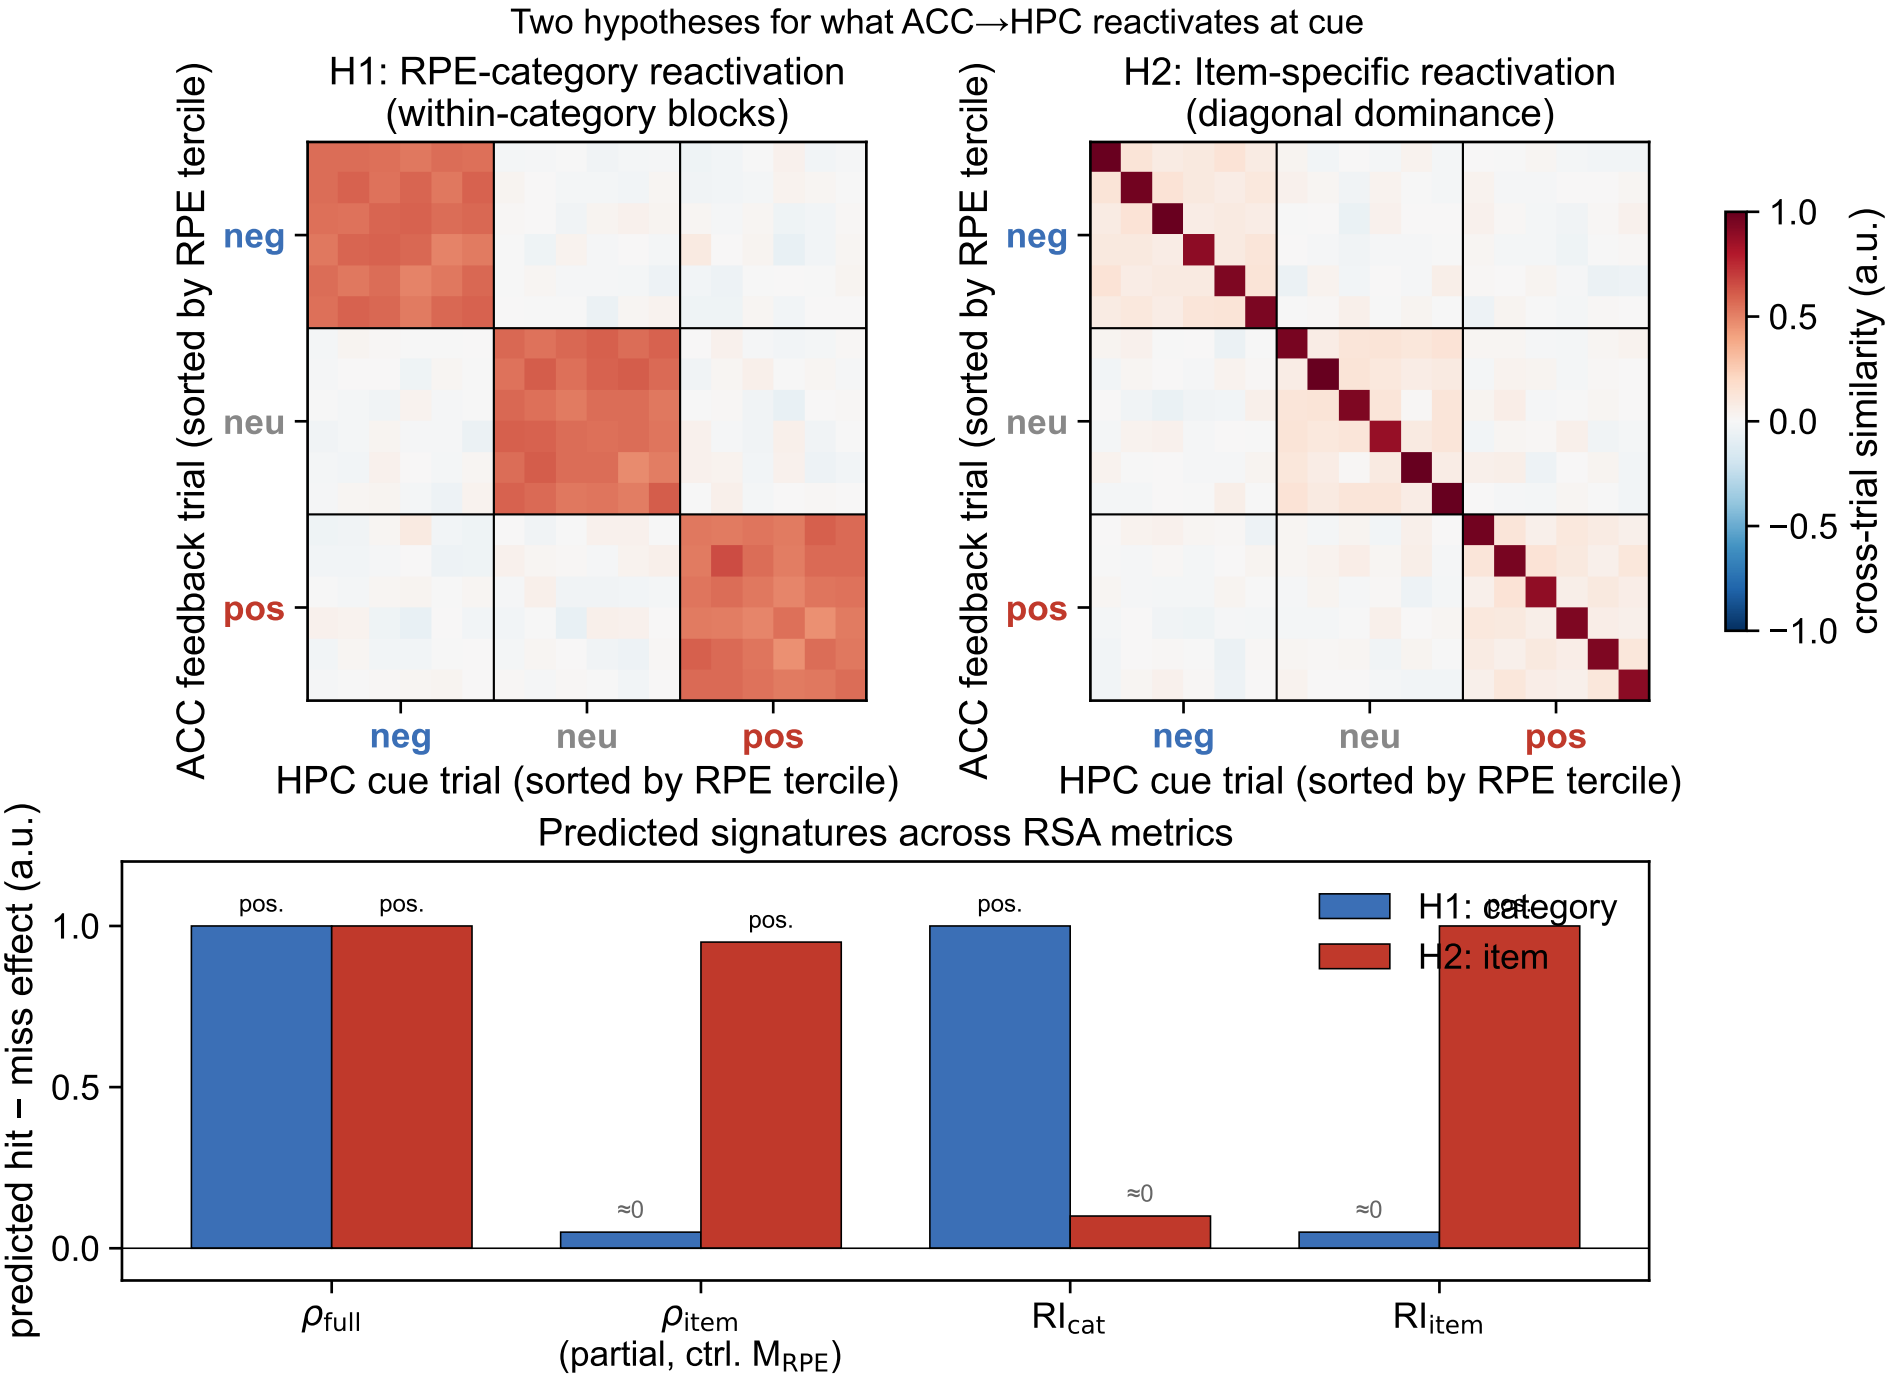
Two hypotheses for what ACC→HPC reactivates at cue
H1: RPE-category reactivation
(within-category blocks)
H2: Item-specific reactivation
(diagonal dominance)
ACC feedback trial (sorted by RPE tercile)
neg
neu
pos
HPC cue trial (sorted by RPE tercile)
1.0
0.5
0.0
−0.5
−1.0
cross-trial similarity (a.u.)
Predicted signatures across RSA metrics
predicted hit − miss effect (a.u.)
pos.
≈0
H1: category
H2: item
ρ_{full}
ρ_{item}
(partial, ctrl. M_{RPE})
RI_{cat}
RI_{item}