
Next Item



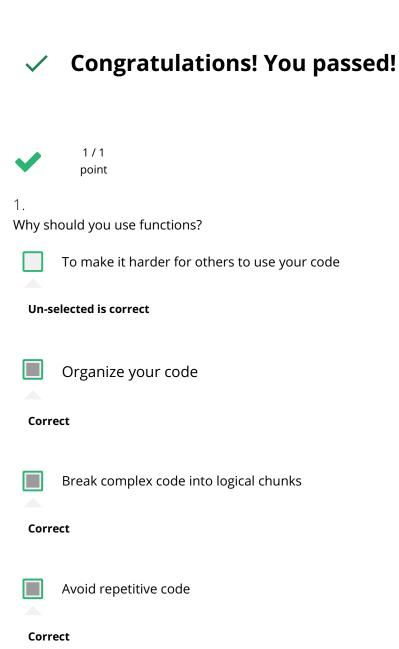

1/1 point

2

Which keyword defines a new function?



new functions





function





1/1 point

3

Return values are type-specific in php functions (a function only returns a value of a specified data type.)



True



False

Correct



1/1 point

4.

What output does the following code produce?

- Value = 30 Doubled = 30
- Value = 15 Doubled = 15
- Value = Doubled =
- Value = 15 Doubled = 30

~	1 / 1 point	
5.	leavened is used to use so de from one who file into a different DLD file?	
Which keyword is used to use code from one php file into a different PHP file?		
	add	
	include	
Corre	ect	
	point	
	append	
~	1 / 1 point	
6.		
Which	function prints out the internal configuration capabilities of your particular PHP installation?	
	phpinfo()	
Corre	ect	
	version()	
	phpver()	
	info()	
~	1 / 1 point	

ations.	10/10 points
Quiz, 10 questions reference	
reference	
Correct Response	
con eet nesponse	
1 / 1 point	
ne keyword [] will expand the scope of a variable outside o	of its function
le keyword [] will expand the scope of a variable outside o	of its furnition.
global	
Correct Response	
1/1 point	
point	
point	ur not
point ne [] function is used to check if a function already exists o	or not.
point ne [] function is used to check if a function already exists o function_exists	or not.
point ne [] function is used to check if a function already exists o function_exists	or not.
point ne [] function is used to check if a function already exists o function_exists	or not.
point ne [] function is used to check if a function already exists o function_exists	r not.
point ne [] function is used to check if a function already exists o function_exists	or not.
point ne [] function is used to check if a function already exists of function_exists Correct Response	or not.
point ne [] function is used to check if a function already exists of function_exists Correct Response	or not.
point ne [] function is used to check if a function already exists of function_exists Correct Response 1/1 point	or not.
point ne [] function is used to check if a function already exists of function_exists Correct Response 1/1 point 0.	
point ne [] function is used to check if a function already exists of function_exists Correct Response 1/1 point 0.	
point ne [] function is used to check if a function already exists of function_exists Correct Response	
point ne [] function is used to check if a function already exists of function_exists Correct Response 1/1 point D. is common to use uppercase and/or long names for global variable.	
point ne [] function is used to check if a function already exists of function_exists Correct Response 1/1 point D. is common to use uppercase and/or long names for global variable.	

Functions

Practice Quiz, 10 questions

10/10 points (100%)

Ļ



