API Proof of delivery

Version	Created by	Department
1.0	Héctor Furió	Client Integrations

Introduction:

The POD Retrieval API allows users to retrieve the Proof of Delivery (POD) for a specific shipment. This document provides details on how to use this API to access shipment PODs.

Prerequisites:

- Have an active account with Customer Code center.
- Generate an authentication token using Amazon Cognito.

Basic Concepts:

Proof of Delivery (POD) is a document that confirms the successful delivery of a shipment. In our API, PODs are provided as PDF files.

Endpoints and resources:

- Production Endpoint: https://api.cttexpress.com/integrations
- Test Endpoint https://api-test.cttexpress.com/integrations
- Endpoint proof of delivery GET:

  /cls/pods/{Shipping number}?client_center_code={Client Center Code}&hash={Hash}

Query parameters:

Parameters	Description	Mandatory
Shipping code	The tracking number of the shipment for which you wish to retrieve the POD.	Yes
Client center code	The customer center code.	Yes
Hash	The MD5 checksum for authentication.	Yes

Hash calculation:

This value is obtained by concatenating the following parameters and converting them to MD5:

Shipping code + client center code + destination postal code

Sample Application:

GET /cls/pods/00000200081896088696 76?client_center_code=0000200001&hash=5c85f83595ac05ae59538e73c1c4ff20

Sample Response:

The server will respond with a PDF file containing the Proof of Delivery for the requested shipment.

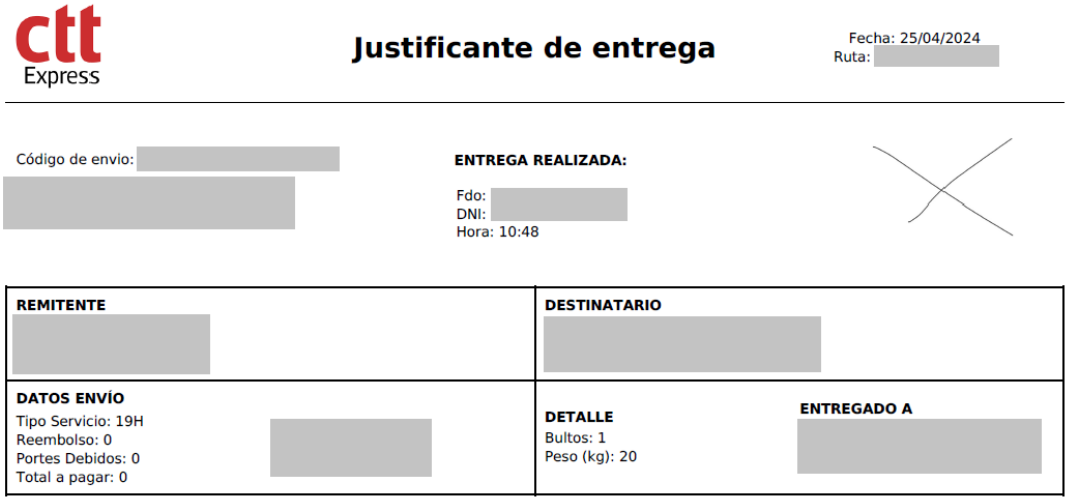

ctt Express

Justificante de entrega

Fecha: 25/04/2024
Ruta:

Código de envio:

ENTREGA REALIZADA:

Fdo:
DNI:
Hora: 10:48

REMITENTE	**DESTINATARIO**
DATOS ENVÍO Tipo Servicio: 19H Reembolso: 0 Portes Debidos: 0 Total a pagar: 0	**DETALLE** Bultos: 1 Peso (kg): 20 **ENTREGADO A**

Error Handling:

- The API returns the following HTTP status codes in case of errors:

  - 400 Bad Request: When invalid or incomplete parameters are provided in the request.

  - 401 Unauthorized: When authentication fails due to an invalid hash or missing parameters.

  - 404 Not Found: When the POD is not found for the specified tracking number.

Testing and Debugging:

It is recommended to use tools such as Postman to test API requests and debug any issues that may arise during integration.

CURL example: (note that the values indicated in the curl are fictitious, you will have to include the correct values, as well as the corresponding environment token)

```
curl --location
'https://api.cttexpress.com/integrations/cls/pods/00000200081896088696 76?client_center_code=0000200001&hash=5c85f83595ac05ae59538e73c1c4ff20' \

--header 'Content-Type: application/json' \

--header 'Authorization: Bearer xxx'
```