```
In deciden compose up of control of the default with the default driver compose up of control of the default driver compose up of control of the default driver consting volume "unrepress-mysal_default" with default driver consting volume "unrepress-mysal_dela" ... done control of the default driver consting wordpress-mysal_wordpress_1 ... done

## Expected result

Theck containers are running and the port mapping:

## Expected result

Theck containers are running and the port mapping:

## Expected result

The deciden ps

**COMMAND**

**COMMAND**
```

```
5 docker compose down -v

wegicomerates@cistics_courses;

segicomerates@cistics_courses;

segi
```

```
### docker compose down -v

and commence glock FIGO - COUNTRO:

### commence glock FIGO - COUNTRO:

##
```

```
# docker compose down -v

# glomentaries@CDSTGD-20UPB02:
# glo
```

```
S. docker compose down -2 user compose down -2 user
```

```
Adocker compose down -v

weglomenzes@SESCED_SQUBWe;

regiomenzes@SESCED_SQUBWe;

regio
```


```
5 docker compose down -v


werg tommarz seglos (100 - 200 miles):

### Seglos (100 miles):

##
```

```
The process of the pr
```

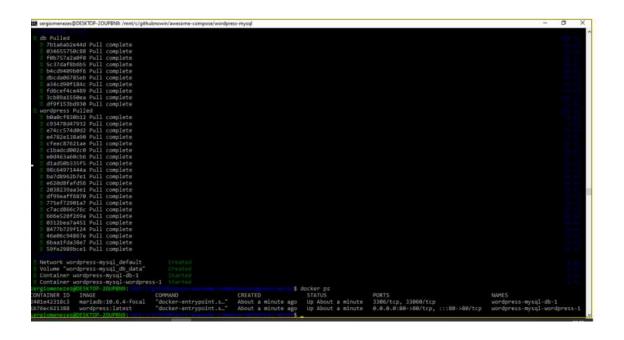

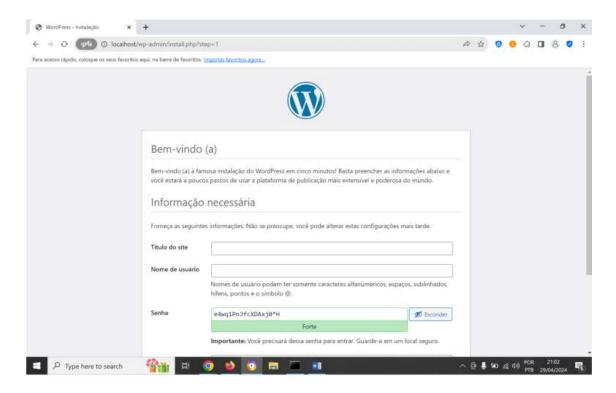

```
In segionements (CESIXOP-)CUERDRA /most/ujshukmenin/avesame-compose/mortgress-mysal

Treating metwork "mortgress-mysal data" with the default driver
preating volume "mortgress-mysal_data" with the default driver

Creating wordpress-mysal_data, and the port mapping:

If decker pare in the containers are running and the port mapping:

If decker pare in the containers are running and the port mapping:

If decker pare in the containers in the containers are running and the port mapping:

If decker pare in the containers in the conta
```