


FAQ : Indexed Concatenation

An Indexed Concatenation is a mathematical notation designed to represent complex datasets in a more concise form. This is typically done by combining repeated elements of the dataset to create a more compact list.

Basics of using Indexed Concatenation to summarize a network.

Here is the example graph used in the SIMULTECH2025 Paper, to be presented by Rhys Sharpe in June 2025, in Bilbao, Spain. Clear patterns are visible:

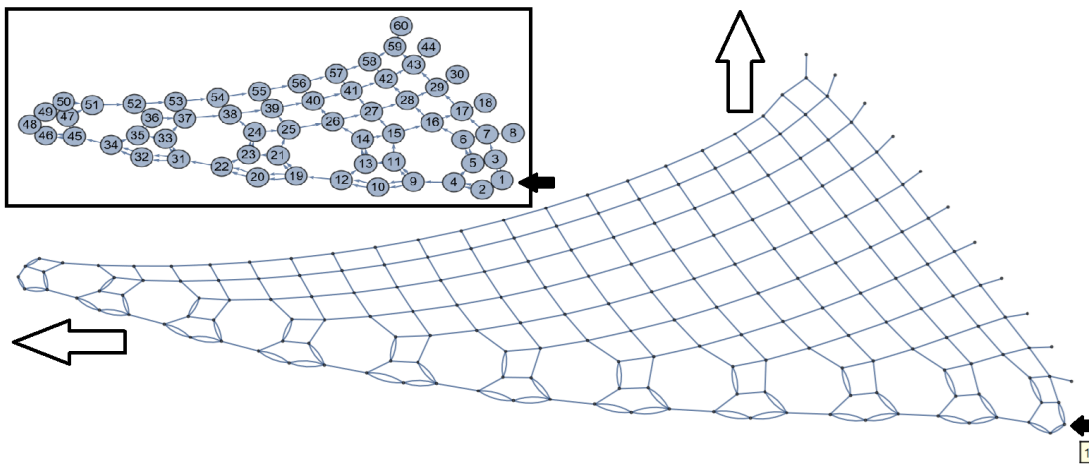

```
Out[8]= { 1 → 2, 1 → 2, 1 → 3, 1 → 3, 2 → 4, 2 → 4, 3 → 5, 3 → 7, 4 → 5, 4 → 9, 5 → 6, 5 → 6, 6 → 7,
        6 → 16, 7 → 8, 7 → 17, 9 → 10, 9 → 10, 9 → 11, 9 → 11, 10 → 12, 10 → 12, 11 → 13, 11 → 15,
        12 → 13, 12 → 19, 13 → 14, 13 → 14, 14 → 15, 14 → 26, 15 → 16, 15 → 27, 16 → 17, 16 → 28,
        17 → 18, 17 → 29, 19 → 20, 19 → 20, 19 → 21, 19 → 21, 20 → 22, 20 → 22, 21 → 23, 21 → 25,
        22 → 23, 22 → 31, 23 → 24, 23 → 24, 24 → 25, 24 → 38, 25 → 26, 25 → 39, 26 → 27, 26 → 40,
        27 → 28, 27 → 41, 28 → 29, 28 → 42, 29 → 30, 29 → 43, 31 → 32, 31 → 32, 31 → 33, 31 → 33,
        32 → 34, 32 → 34, 33 → 35, 33 → 37, 34 → 35, 34 → 45, 35 → 36, 35 → 36, 36 → 37,
        36 → 52, 37 → 38, 37 → 53, 38 → 39, 38 → 54, 39 → 40, 39 → 55, 40 → 41, 40 → 56,
        41 → 42, 41 → 57, 42 → 43, 42 → 58, 43 → 44, 43 → 59, 45 → 46, 45 → 46, 45 → 47,
        45 → 47, 46 → 48, 46 → 48, 47 → 49, 47 → 51, 48 → 49, 48 → 61, 49 → 50, 49 → 50 }
```


The data listed above represents the first 100 edges of the graph. 1 → 2 means a connection between vertices 1 and 2. We note that the repetitive patterns in the graph are not at all visible in the edge list. But grouping edges by “out-vertex” and taking the differences of the vertex numbers for each edge gives the edge difference set list (EDSL), in which patterns reappear.

This shows how the graph edges correspond to sets in the EDSL. Even in the first few sets we begin to

final values are reached. In this case it's $2k$, 2 and 18, but the latter can be replaced by ∞ . Assuming the pattern has been well established and will continue indefinitely, we have succeeded in summarizing the entire infinite network's EDSL in one line! Similarly, most causal networks generated by a Sessie (Sequential Substitution System) Ruleset can be summarized by this notation.

Some other examples of I-CATs of networks


$Out[\#]=$



$Out[\#]=$

$$\left\{ \epsilon^4[\{2, 2, 2\}, \{1, 3, 3\}, \{2\}, \{1, 1, 3\}, \{2\}, \{1, 1, 1\}, \{3\}] \right\}$$


$Out[\#]=$

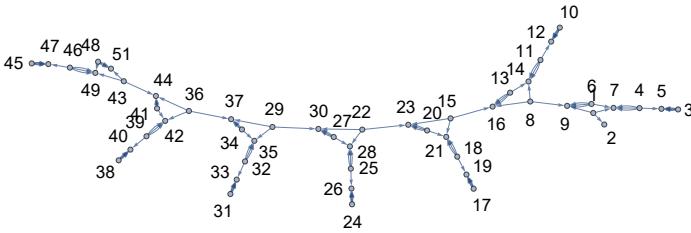

$Out[\#]=$

$$\left\{ \epsilon^7[\{1, 6, 8\}, \emptyset, \left\{ \epsilon^4[2] \right\}, \epsilon^2[\left\{ 1, \epsilon^3[3] \right\}, \emptyset]] \right\}$$

Out[8]=

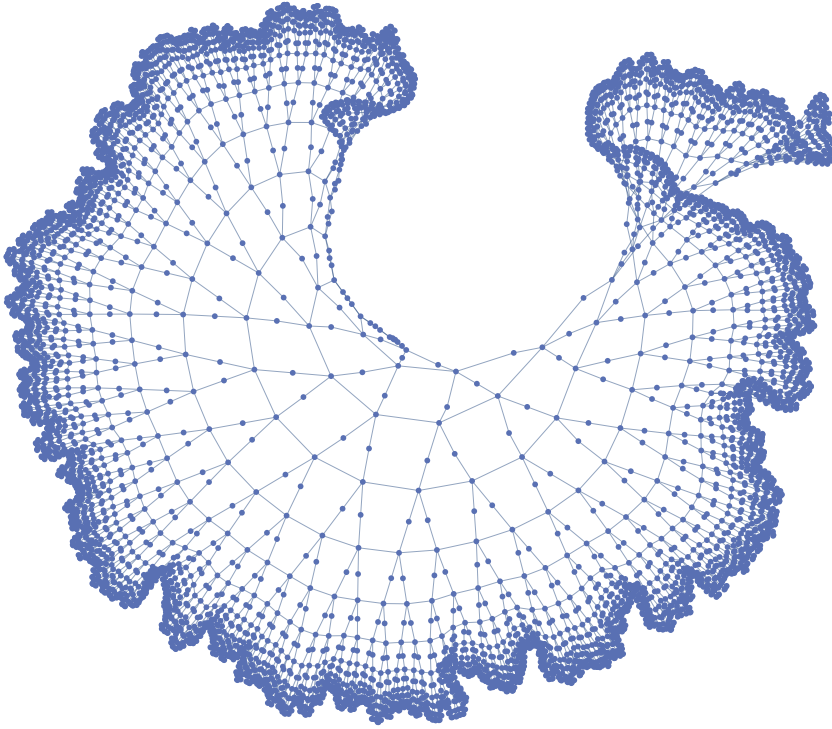

Out[8]=

$$\left\{ \epsilon_{k=1}^{10} \left[\{-1+2^k, 2^k, 1+2^k\}, \epsilon_{j=1}^{1+2^k} [\{1+2^k\}], \{1\}, \epsilon_{j=1}^{-1+2^k} [\{1, -1+2^k+j, 2^k+j\}] \right] \right\}$$

Examples of I-CATs summarizing patterns in decimal expansions:

Out[19]=

Fraction	Decimal Representation	Indexed Concatenation	Summation
1/3	0.33333...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}3$	$0 + \sum_{k=1}^{\infty} (3 \cdot 10^{-k})$
1/9	0.111111111...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}1$	$0 + \sum_{k=1}^{\infty} (1 \cdot 10^{-k})$
1/11	0.0909090909...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}09$	$0 + \sum_{k=1}^{\infty} (9 \cdot 10^{-k})$
1/7	0.14285714285714285714...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}142857$	$0 + \sum_{k=1}^{\infty} (1428571 \cdot 10^{-6k})$
1/13	0.076923076923076923...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}076923$	$0 + \sum_{k=1}^{\infty} (076923 \cdot 10^{-6k})$
1/17	0.058823529411764705882...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}0588235294117647$	$0 + \sum_{k=1}^{\infty} (0588235294117647 \cdot 10^{-16k})$
	0.010010001...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}((\overset{i}{\underset{j=1}{\text{€}}}0)1)$	$0 + \sum_{k=1}^{\infty} 1 \left(\frac{1}{10^k}\right)^{k+1} \quad ***$ NOT REALLY SURE IF THIS AND DOWN ARE CORRECT
	0.112123123412345...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}((\overset{i}{\underset{j=1}{\text{€}}}j)$	$0 + \sum_{k=1}^{\infty} 1 \left(\frac{1}{10}\right)^k$
	0.1223334444...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}((\overset{i}{\underset{j=1}{\text{€}}}i)$	$0 + \sum_{k=1}^{\infty} 1 \left(\frac{1}{10}\right)^k$
	0.1123581321...	$0.\overset{\infty}{\underset{i=1}{\text{€}}}(\phi^n - (-\phi)^{-n}) / \sqrt{5}$	$0 + \sum_{k=1}^{\infty} 1 \left(\frac{1}{10}\right)^k$

Examples of I-CATs with Lists/Sequences

A few manual constructions:

$$\overset{3}{\underset{i=1}{\text{€}}} \{i, i^2\} = \{1, 1\} \# \{2, 4\} \# \{3, 9\} = \{1, 1, 2, 4, 3, 9\}$$

$$\overset{5}{\underset{i=1}{\text{€}}} \{i, 10-i\} =$$

$$\{1, 9\} \# \{2, 8\} \# \{3, 7\} \# \{4, 6\} \# \{5, 5\} = \{1, 9, 2, 8, 3, 7, 4, 6, 5, 5\}$$

$$\left\{ \overset{3}{\underset{i=1}{\text{€}}} \overset{3}{\underset{j=1}{\text{€}}} [j i] \right\} = \left\{ \overset{3}{\underset{i=1}{\text{€}}} [i, 2i, 3i] \right\} =$$

$$\{[1, 2, 3] \# [2, 4, 6] \# [3, 6, 9]\} = \{1, 2, 3, 2, 4, 6, 3, 6, 9\}$$

$$\left\{ \overset{3}{\underset{i=1}{\text{€}}} \overset{3}{\underset{j=1}{\text{€}}} \overset{3}{\underset{k=1}{\text{€}}} [i j k] \right\} =$$

$$\left\{ \overset{3}{\underset{i=1}{\text{€}}} \overset{3}{\underset{j=1}{\text{€}}} [ij, 2ij, 3ij] \right\} = \left\{ \overset{3}{\underset{i=1}{\text{€}}} ([i, 2i, 3i] \# [2i, 4i, 6i] \# [3i, 6i, 9i]) \right\}$$

$$= \left\{ \overset{3}{\underset{i=1}{\text{€}}} [i, 2i, 3i, 2i, 4i, 6i, 3i, 6i, 9i] \right\}$$

$$= \{[1, 2, 3, 2, 4, 6, 3, 6, 9]\}$$

$$\begin{aligned} & \# [2, 4, 6, 4, 8, 12, 6, 12, 18] \# [3, 6, 9, 6, 12, 18, 9, 18, 27] \} \\ = & \{1, 2, 3, 2, 4, 6, 3, 6, 9, 2, 4, \\ & 6, 4, 8, 12, 6, 12, 18, 3, 6, 9, 6, 12, 18, 9, 18, 27\} \end{aligned}$$

$$\begin{aligned} & \left\{ \prod_{i=1}^4 \prod_{j=1}^5 [j + i, j * i] \right\} = \left\{ \prod_{i=1}^4 [1 + i, 1 i, 2 + i, 2 i, 3 + i, 3 i, 4 + i, 4 i, 5 + i, 5 i] \right\} \\ & \{2, 1, 3, 2, 4, 3, 5, 4, 6, 5, 3, 2, 4, 4, 5, 6, 6, 8, 7, 10, \\ & 4, 3, 5, 6, 6, 9, 7, 12, 8, 15, 5, 4, 6, 8, 7, 12, 8, 16, 9, 20\} \end{aligned}$$

Out[*]=

Compressed Form of Pascal's Triangle:

$$\prod_{n=0}^5 \left[\left\{ \prod_{k=0}^n \left[\frac{n!}{k! (-k+n)!} \right] \right\} \right]$$

Expanded Form:

$$\begin{aligned} & \{1\} \\ & \{1, 1\} \\ & \{1, 2, 1\} \\ & \{1, 3, 3, 1\} \\ & \{1, 4, 6, 4, 1\} \\ & \{1, 5, 10, 10, 5, 1\} \end{aligned}$$

Examples of I-CATs with Matrices

$$\begin{pmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & a_{22} & \dots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1} & a_{m2} & \dots & a_{mn} \end{pmatrix}$$

IC form :

$$\prod_{i=1}^m \left\{ \prod_{j=1}^n \{a_{ij}\} \right\}$$

The Indexed Concatenation Notation can represent infinite matrices of quantum mechanics –

a, a^\dagger :

Out[*]=

$$\begin{pmatrix} 0 & \sqrt{1} & 0 & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & \sqrt{2} & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & \sqrt{3} & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & \sqrt{4} & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & 0 & \sqrt{5} & 0 & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & \sqrt{6} & \dots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}, \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & \dots \\ \sqrt{1} & 0 & 0 & 0 & 0 & 0 & 0 & \dots \\ 0 & \sqrt{2} & 0 & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & \sqrt{3} & 0 & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & \sqrt{4} & 0 & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & \sqrt{5} & 0 & 0 & \dots \\ 0 & 0 & 0 & 0 & 0 & \sqrt{6} & 0 & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}$$

Out[*]=

$$\left\{ \prod_{k=1}^{\infty} \left[\left\{ \prod_{i=1}^k [\emptyset], \sqrt{k}, \prod_{i=1}^{\infty} [\emptyset] \right\} \right] \right\}, \left\{ \prod_{k=1}^{\infty} \left[\left\{ \prod_{i=1}^{k-2} [\emptyset], \sqrt{k-1}, \prod_{i=1}^{\infty} [\emptyset] \right\} \right] \right\}$$

Read the rows of a this way:

On row k , start with a sequence of 0s (k copies), followed by \sqrt{k} , then an infinite sequence of 0s.

Note: $\left\{ \overset{5}{\epsilon} [0] \right\} = \left\{ \overset{5}{\underset{j=1}{\epsilon}} [0] \right\} = \{0, 0, 0, 0, 0\}$, (i.e., a subsequence of 5 copies of 0 inserted into the list (an ordered multiset)).

Read the rows of a^\dagger this way:

On row k , start with a sequence 0s ($k - 2$ copies), followed by $\sqrt{k - 1}$, then an infinite sequence of 0s.

Tricky point: when $k = 1$ or 2 , what does it mean to concatenate $k - 2$ copies of 0? (!)

Let's break this down.

Although the index variable isn't explicitly given, $\overset{k-2}{\epsilon} [0]$ actually means something like $\overset{k-2}{\underset{j=1}{\epsilon}} [0]$, so

what are the meanings of $\overset{0}{\underset{j=1}{\epsilon}} [0]$ and $\overset{-1}{\underset{j=1}{\epsilon}} [0]$? The first clearly means a sequence of 0 copies of 0, so

it's an empty subsequence, and adds no entries to that row. But we also consider $\overset{-1}{\underset{j=1}{\epsilon}} [0]$ to be an

empty subsequence, since "j starts at 1 and goes up to -1" shouldn't even "start the loop", we've already passed the termination condition!

Other work:

- How to "reduce" (or compress) a network list without using ToNetDifferenceSets? *Unknown!*
 - We need this in order to continue on the work started by Jeanna Toulouse and Chris Trana
 - How will these two reductions compare? Can we move directly from one to the other?
 - BREAKTHROUGH!

An algorithm has been developed to convert an EDSL I-Cat (even multiply nested!) into an I-Cat of the original graph's edges.

The EDSL I-Cat is easier to generate, and then we use it to come back to the "Trana Form" of the graph's edges. Topic of a future paper.

- Can the dimension of the network be read directly from the IC reduced form? *Unknown!*
- Can IC compress the complete "Evolution" or even the TEvolution (tagged evolution) of the Sessie? *Unknown!*
- Can IC be applied in general to repeating strings? *Unknown, but probably.*
- Can IC be applied to musical notation? "What is the IC reduced form of Beethoven's Ninth?" (Or of one of Bach's Concertos?!)

Perhaps more fundamentally,

- How can the ReduceSetList algorithm be made more reliable?
 - Last year's version only worked about half the time, this new version does better (~70%), but needs improvement still.

- We need to step through the algorithm in our meeting, and ask everyone to suggest improvements.
 - NOT the code, just the logic of the steps involved.
 - **A couple nice demos showing the steps of the reduction algorithm are desperately needed.**

FAQ Sessie Intro, 2025.4.2, Kenneth Caviness and Colton Edelbach